
# **Open Office | New Construction**

ASHRAE 90.1-2010



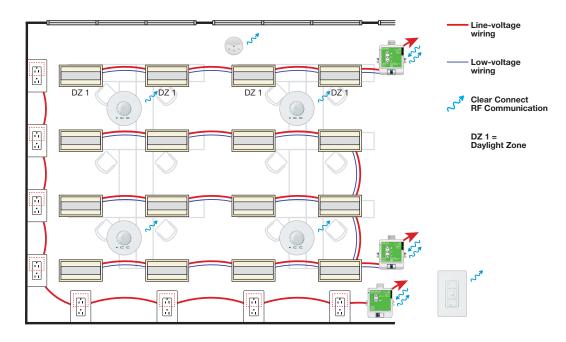

Symbol	Model Number	Description	Qty
	RMJS-8T-DV-B	PowPak dimming module with 0-10V	2
	RMJS-20R-DV-B	20A PowPak relay module	1
	LRF2-DCRB-WH	Radio Powr Savr wireless daylight sensor	1
	LRF2-OCR2B-P-WH	Radio Powr Savr wireless ceiling-mount occupancy sensor	4
	PJ2-3BRL-GWH-L01	Pico wireless 3-button with raise/lower control	1
	PICO-WBX-ADAPT	Pico wallbox adapter	1

## **Control Functionality**

### **Occupant Enters:**

All lights automatically turn on to 50% light level. Occupant turns on lights to maximum level manually. Maximum light level is set to 80%. Controlled receptacles automatically regain power when occupant enters.

### When Occupied:

Automatic: Overhead lights dim/brighten based on daylight availability. There is one perimeter daylight zone. Manual: Occupant uses wall dimmers to set desired light levels for all lights.

### **Occupant Exits:**

All lights automatically turn off 15 minutes after all occupants exit. 50% of all receptacles automatically turn off 15 minutes after all occupants exit.

Add a Vive wireless hub to enable simple setup and re-zoning, system monitoring, timeclock functionality, and advanced integration.

**Code Notes:** For non-daylight open offices, all general lighting can be connected to a single 0-10V dimming module. Want to add a Vive wireless hub for more features? Go to lutron.com/vive for complete compatibility and design details. This solution requires 0-10V enabled ballasts and drivers by others.