

Manual Roller Shade

A manually-operated shading solution that can enhance the aesthetics of a space, provide glare control, and allow occupants to access daylight and views. Ideal for motorized shading projects that also require manual solutions.

Features

- Smooth, clutch-assisted manual operation
- Provides maximum window coverage with the smallest possible light gaps between the shade fabric and the window frame
- Covered by Lutron Shading Solutions standard warranty; see: lutron.com/TechnicalDocumentLibrary/Window_Systems_Warranty.pdf

Fabric Drop Options







Regular Roll
(standard)




Reverse Roll

Clutch Options



- Sized and rated by fabric weight capacity
- Can be right or left mounted
- Chain and chain tensioning safety device included

Model	Capacity	for Tube(s)
 V8	8 lb (3.6 kg)	1 in (25 mm) <i>steel</i>
 V16	16 lb (7.3 kg)	1.375 in (35 mm) <i>steel</i> 1.750 in (44 mm) <i>steel</i> 2.000 in (51 mm) <i>aluminum</i>
 V24	24 lb (10.8 kg)	1.375 in (35 mm) <i>steel</i> 1.750 in (44 mm) <i>steel</i> 2.000 in (51 mm) <i>aluminum</i> 2.500 in (64 mm) <i>aluminum</i>
 V24 w/Spring Assist	30 lb (13.6 kg)	2.000 in (51 mm) <i>aluminum</i> 2.500 in (64 mm) <i>aluminum</i>

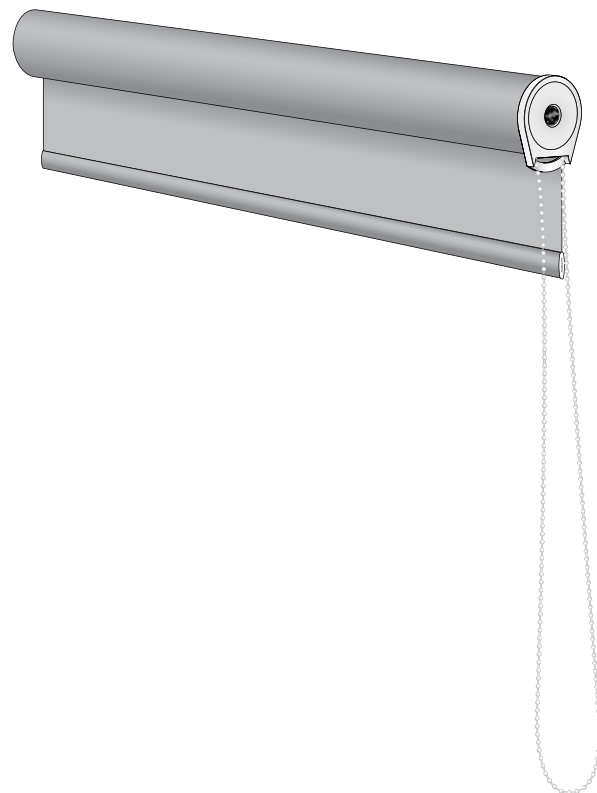

Chain Tensioning Safety Device

This shade is equipped with a pre-installed pull-chain tension device (meets ANSI/WCMA A100.1-2022 safety guidelines), designed to secure and maintain tension on the pull-chain loop. For safe operation of the window treatment, the installer must affix the device in an appropriate location according to the instructions packaged with the shade.

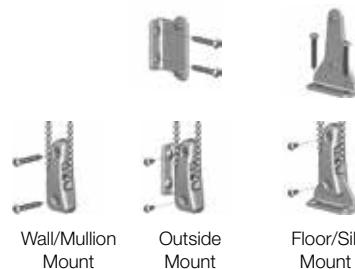

Window Blind Cord Strangulation Risk

Window blinds with a damaged or loose tension device or retractable cord that fails to fully retract pose a strangulation risk to children. To avoid this potential strangulation risk, consider purchasing cordless products or products with inaccessible cords.

Riesgo de Estrangulamiento en Cuerdas de Persianas


Las persianas con un dispositivo tensor suelto o dañado o con una cuerda retráctil que no se ajusta completamente representan un riesgo de estrangulación para los niños. Para evitar un posible riesgo de estrangulamiento, considere comprar productos inalámbricos o productos con cuerdas inaccesibles.

Job Name:


Model Numbers:

Job Number:

Top Trim Options



Top Back Cover and Fascia*
 3 in x 3 in (76 mm x 76 mm) or
 4 in x 4 in (102 mm x 102 mm)
 *Fascia is notched on the clutch-side
 for pull-chain clearance




Pocket
 4.75 in x 5.00 in (121 mm x 127 mm)
 with 3 in (76 mm) flap

Fabric Options


- **Spec Grade (THEIA compliant) solar screens:** a selection of solar screen fabrics with tightly controlled fenestration properties and strict tolerance requirements
- **Sustainable Solar Screens:** a selection of PVC free fabrics which have the combined benefits of traditional solar screens with environmentally friendly and sustainable properties
- **General Purpose Solar Screens:** a selection of traditional and dual-sided solar screens to minimize glare while maximizing daylight, view, and productivity
- **Blackouts:** a selection of dual-sided and standard opaque fabrics to block daylight

Please reference the Lutron Performance Shading Advisor and/or the Shade Configuration Tool (SCT) for up-to-date fabric performance specifications and availability at performanceshadingadvisor.com.


Bottom Bar Options




Architectural



Designer



Sealed



Exposed

Lutron and the Lutron logo are trademarks, or registered trademarks, of Lutron Electronics Co., Inc. in the U.S. and/or other countries.

Job Name:

Model Numbers:

Job Number: