


LUTRON®


For Your Information ...




Sivoia QED™ Multigroup Keypads

Summary


Starting in March 2005, there are three non-standard faceplates for Sivoia QED keypads that allow for control of multiple groups of Sivoia QED shades and draperies from a single wallbox.

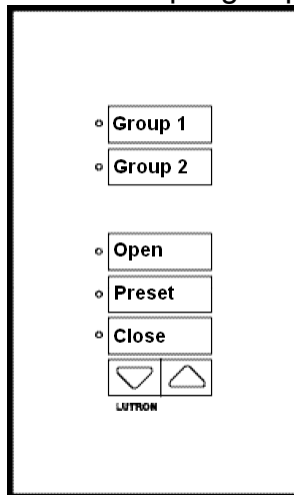

Architectural:
SK-6C-(I/NI)-(COLOR)-E-CPN3233
Designer:
SKD-6C-(COLOR)-E-CPN3233

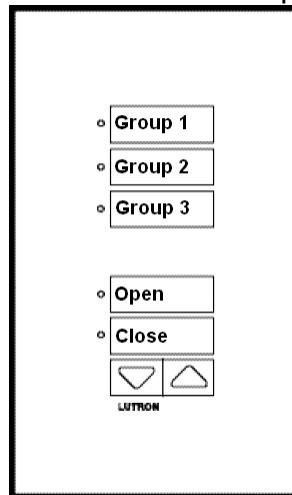

Architectural:
SK-6C-(I/NI)-(COLOR)-E-CPN2291
Designer:
SKD-6C-(COLOR)-E-CPN2291

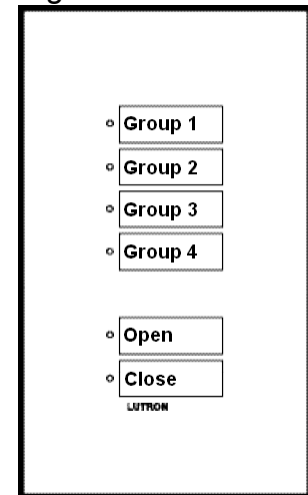

Architectural:
SK-6C-(I/NI)-(COLOR)-E-CPN1949
Designer:
SKD-6C-(COLOR)-E-CPN1949

How to Use

Select the desired group to control, and then tap the desired action. For example, to open group 4, tap the “Group 4” button, and then tap the “Open” button. Only one group can be selected at a time.

Suggestions

- Order custom engraving to more clearly describe what the groups are.
- If desired, you can use the CPN3233 faceplate as a simple partition control. If you order custom engraving to label “Group 1” as “Wall Open” and “Group 2” as “Wall Closed”, and program the groups accordingly, you can have a keypad function in Partition mode when the “Wall Closed” group is selected, and non-partitioned mode when the “Wall Open” group is selected.

How to Order

- Order a keypad from stock using the table shown to the right. Make sure to order the correct color, insert choice, and style (architectural or designer).
- Fill out the engraving sheet:
<http://www.lutron.com/hwi/pdfs/engsk7b.pdf>

Keypad Faceplate	Keypad to Order
CPN3233	SQ(A/D)-5R
CPN2291	SQ(A/D)-5R
CPN1949	SQ(A/D)-3D




NOTE: You need to fill out an engraving sheet even if you want the engraving shown on the previous page.

- Order the desired CPN faceplate using the completed engraving sheet

How to Install/Program

Follow these instructions:

- Install the Sivoia QED keypad as per the instruction sheet
- Replace the keypad's faceplate with the CPN faceplate
- Set dip switches #1-5 according to the table shown to the right.
- Apply the configuration by defaulting the keypad:
Press and Hold Open + Close for 5 seconds.
Press and Hold Open for 5 seconds.
Press and Hold Close for 5 seconds.
Press and Hold Open + Close for 5 seconds.

Keypad Faceplate	Dip Switches #1-5
CPN3233	
CPN2291	
CPN1949	

The keypad can now be programmed just like any other Sivoia QED keypad. Simply follow these three steps:

- Address the system
- Set the limits of your EDUs
- Assign each group on your keypad

NOTE: When using the CPN1949 faceplate, the Group 1 and Group 4 buttons can be used to Unassign and Assign EDUs (instead of the Raise and Lower buttons).

Worldwide Technical and Sales Assistance

If you need assistance call the toll-free **Lutron Technical Support Center**. Please provide exact model number when calling.

24 hours/day + 7 days/week

(800) 523-9466 (U.S.A. and Canada)

Other countries call (610) 282-3800

Visit us on the web at www.lutron.com

Lutron Electronics Co., Inc.
7200 Suter Road
Coopersburg, PA 18036-1299 U.S.A.
Phone: (610) 282-3800
Fax: (610) 282-3090

Lutron and *Sivoia* are registered trademarks and *Sivoia QED* is a trademark of Lutron Electronics Co., Inc.
© 2005 Lutron Electronics Co., Inc.

Rev B 4/05

Need additional assistance? Call the Lutron Technical Support Center 1-800-523-9466.