

Lutron Electronics

FF&E Motorized Window Treatments Specification Guide



Project Name: _____

Manufacturer:

Lutron Electronics Co., Inc.
7200 Suter Road
Coopersburg, PA 18036
www.lutron.com

Lutron Contact:

Name: _____

Phone: _____

Email: _____

Authorized Local Lutron Installer: _____

Page 2: Quick Reference Guide

Page 3: Public Space Roller Shades

Page 4: Public Space Drapery Track


Page 5: Guestroom Roller Shades

Page 6: Guestroom Drapery Track


QUICK REFERENCE GUIDE TO SUPPORT FF&E SPECIFICATION

Mounting for Roller Shade:

Single pocket

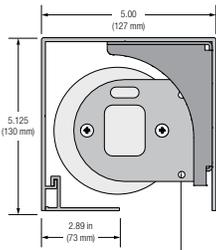


Dual pocket

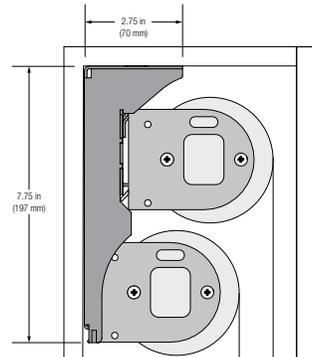


Dimensions

Single drapery track

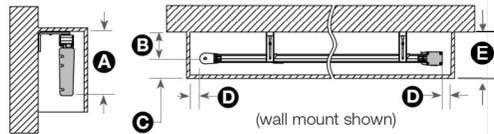


- A. 11.25 in (286 mm)
- B. 3.5 in (89 mm)
- C. 2.5 in (64 mm)
- D. 1 in (25 mm)
- E. 6 in (152 mm)

Dual drapery track

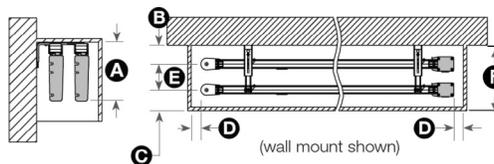


- A. 11.25 in (286 mm)
- B. 3.5 in (89 mm)
- C. 2.5 in (64 mm)
- D. 1 in (25 mm)
- E. 5.5 in (140 mm)
- F. 11.5 in (292 mm)

Pleat Styles:

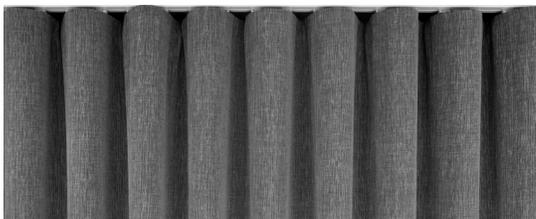

Ripplefold
(120% fullness)

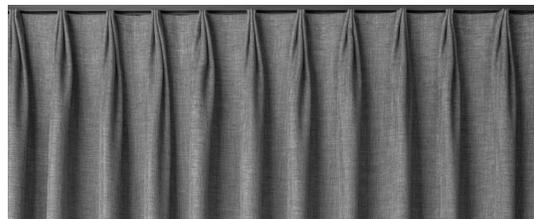


Pinchpleat
(2.5x fullness)

Ripplefold Style

Fullness is the ratio of fabric used to cover a particular opening.


80% Fullness

Panel width = system width + 80%

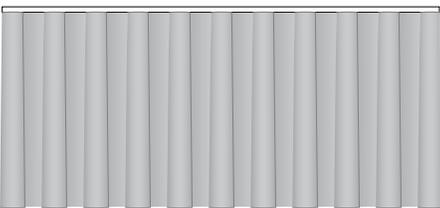


100% Fullness

Panel width = system width + 100%

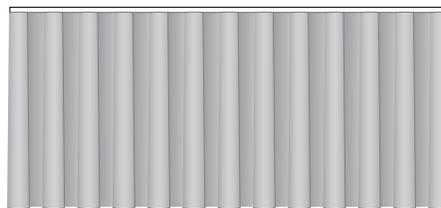

120% Fullness

Panel width = system width + 120%

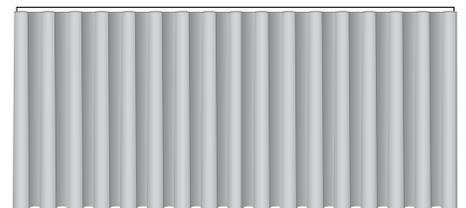

Pinchpleat Style

Pinchpleat drapery panels are offered at 3 fullness ratings:

- **3x:** panel width = system width x 3 (sheer fabrics only)
- **2.5x:** panel width = system width x 2.5
- **2x:** panel width = system width x 2

LUTRON MOTORIZED ROLLER SHADES – PUBLIC SPACES

Location: _____

Description: Lutron low-voltage QS roller shade

Opening Size: Refer to drawings for location

Shade Style: Single Roller Shade or Dual Roller Shade

Top Treatment: Pocket Ceiling or Wall Mount – refer to drawings

Power Supplies: 10 output QSPS power panel or Remote mount J-box power supply or Plug-in power supply

Control System: To be integrated with Lutron lighting control system – Yes or No

(select one:) Quantum Athena Lutron QS Other Lutron System – coordinate with Lutron rep or client



Wall Control: Lutron Wall Control Options by Control System:

Quantum: Palladiom SeeTouch Pico

Athena: Palladiom SeeTouch Pico

Lutron QS: Pico Wireless

Standalone (no system): Pico Wireless

To be coordinated with owner



Palladiom



seeTouch



Pico wireless

Fabric:

Note: All Lutron fabric options (and samples) can be found on performanceshadingadvisor.com

Blackout Fabric Name: _____ Part Number: _____

Sheer Fabric Name: _____ Part Number: _____

Installation: Lutron low-voltage shades to be procured through authorized installer

Notes:

- Installer to field-verify all dimensions prior to ordering roller shade/fabric
- Refer to ceiling details, elevations and furniture plan for further details
- Contact Lutron rep for authorized installers in area or customer service at commercialshadesCS@lutron.com

LUTRON MOTORIZED DRAPERY TRACK – PUBLIC SPACES

Location: _____

Description: Lutron low-voltage QS Drapery

Opening Size: Refer to drawings for location

Shade Style: Drapery Track

Top Treatment: Mounted in Ceiling Pocket or Recessed Mount



Note: For blackout draperies, to avoid light leakage please refer to Lutron App Note 765

Power Supplies: 10 output QSPS power panel or Remote mount J-box power supply or Plug-in power supply

Control System: To be integrated with Lutron lighting control system – Yes or No

(select one:) Quantum Athena Lutron QS Other Lutron System – coordinate with Lutron rep or client
Alena Pull-to-Start (standalone, no control required, weight limitations apply, see spec sheet)

Wall Control: Lutron Wall Control Options by Control System:

Quantum: Palladiom SeeTouch Pico

Athena: Palladiom SeeTouch Pico

Lutron QS: Pico Wireless

Standalone (no system): Pico Wireless



Palladiom



seeTouch



Pico wireless

Configuration: Left Draw Center Draw Right Draw

COM Fabric: Drapery fabric TBD – Lutron does not provide drapery panels

Sheer Style: Ripplefold or Pinchpleat

Sheer Fullness: Ripplefold: 80% 100% 120% - Pinchpleat: 2.5X 3X

Blackout Style: Ripplefold or Pinchpleat

Blackout Fullness: Ripplefold: 80% 100% 120% - Pinchpleat: 2X 2.5X 3X

Installation: Lutron low-voltage shades to be procured through authorized installer

Notes:

- Installer to field-verify all dimensions and carrier track spacing prior to ordering drapery track/fabric
- Confirm drapery fabric panel weight to be compatible with drapery track weight restrictions
- Carrier track spacing to be provided by installer/Lutron and shared with drapery workroom to ensure proper panel production and installation. Procurement agency to facilitate communication.
- Refer to ceiling details, elevations and furniture plan for further details.
- Contact Lutron rep for authorized installers in area or customer service at commercialshadesCS@lutron.com

LUTRON MOTORIZED ROLLER SHADES – GUESTROOMS & ADA GUESTROOMS

Location: _____

Description: Lutron low-voltage QS roller shade

Opening Size: Refer to drawings for location

Shade Style: Roller Shade

Top Treatment: Ceiling mounted in pocket

Power Supplies: Remote mount J-box power supply or Plug-in power supply

Control System: Lutron myRoom Guestroom Management System or Standalone (no system)

To be integrated with Lutron myRoom system during commissioning



Wall Control:

myRoom: Palladiom or Pico

Standalone: Pico Wireless



Palladiom



Pico wireless

Note: To ensure full blackout, please reference Lutron App Note 765

Note on ADA Guestrooms: Certain building codes mandate motorized window treatments for ADA Guestrooms. ADA Shades can be standalone (no system) or integrated into myRoom system.

Fabric:

Note: All Lutron fabric options (and samples) can be found on performanceshadingadvisor.com

Blackout Fabric Name: _____ Part Number: _____

Sheer Fabric Name: _____ Part Number: _____

Installation: Lutron low-voltage shades to be procured through authorized installer

Notes:

- Installer to field-verify all dimensions prior to ordering roller shade/fabric
- Refer to ceiling details, elevations and furniture plan for further details
- Contact Lutron rep for authorized installers in area or customer service at commercialshadesCS@lutron.com

LUTRON MOTORIZED DRAPERY TRACK – GUESTROOMS & ADA GUESTROOMS

Location: _____

Description: Lutron low-voltage Sivoia QS Drapery Track or
Lutron low-voltage Alena Pull-to-Start Drapery

Note: Alena pull-to-start is the most cost-effective option, size limitations and weight restrictions apply. Review spec sheet or consult Lutron rep.

Opening Size: Refer to drawings for location

Shade Style: Drapery Track

Top Treatment: Mounted in Ceiling Pocket or Recessed Mount

Power Supplies: Remote J-Box power supply or Plug in power supply

Control System: To be integrated with Lutron lighting control system – Yes or No

(select one:) Quantum Athena Lutron QS Other Lutron System – coordinate with Lutron rep or client
Alena Pull-to-Start (standalone, no control required, weight limitations apply, see spec sheet)



Wall Control: Lutron Wall Control Options by Control System:

Quantum: Palladiom SeeTouch Pico

Athena: Palladiom SeeTouch Pico

Lutron QS: Pico Wireless

Standalone (no system): Pico Wireless



Palladiom



seeTouch



Pico wireless

Configuration: Left Draw Center Draw Right Draw

Note: For blackout draperies, to avoid light leakage please refer to Lutron App Note 765

COM Fabric: Drapery fabric TBD – Lutron does not provide drapery panels

Sheer Style: Ripplefold or Pinchpleat

Sheer Fullness: Ripplefold: 80% 100% 120% - Pinchpleat: 2.5X 3X

Blackout Style: Ripplefold or Pinchpleat

Blackout Fullness: Ripplefold: 80% 100% 120% - Pinchpleat: 2X 2.5X 3X

Installation: Lutron low-voltage shades to be procured through authorized installer

Notes:

- Installer to field-verify all dimensions and carrier track spacing prior to ordering drapery track/fabric
- Carrier track spacing to be provided by installer/Lutron and shared with drapery workroom to ensure proper panel production and installation. Procurement agency to facilitate communication.
- Refer to ceiling details, elevations and furniture plan for further details.
- Contact Lutron rep for authorized installers in area or customer service at commercialshadesCS@lutron.com

