


QS-CBL-LSZH Cable

Low-Smoke Zero-Halogen (LSZH) rated cable for use with the following Lutron systems:

- GRAFIK Eye
- Energi Savr Node
- Quantum
- myRoom
- HomeWorks QS

Specifications

- Model Number:
QS-CBL-LSZH-500 – 152 m (500 ft) spool
- Adheres to CE standards for Low Smoke Generation (EN 60332-1-2), Halogen Gas Emission (EN 61034-2), and Flame Retardation (EN 60754-1&2).
- Five Conductors:
 - Common – 0.75 mm² (18 AWG)
 - Power – 0.75 mm² (18 AWG)
 - MUX Data – 0.25 mm² (22 AWG)
 - MUX Data – 0.25 mm² (22 AWG) } Twisted wire pair (TWP)
 - Drain Wire – 0.2 mm² (24 AWG)
- Total Outer Jacket Diameter: 5.3 mm (0.21 in).
- 300 V~ rated.
- LSZH sheath, 70 °C rated.
- RoHS2 Compliant.
- CE Compliant (LVD).
- CPR Classification: E_{ca}.
- Capacitance of 0.25 mm² (22 AWG) Twisted Wire Pair:
 - Conductor to Shield: 178 pF/m (54 pF/ft) max
 - Conductor to Conductor: 96 pf/m (29 pF/ft) max

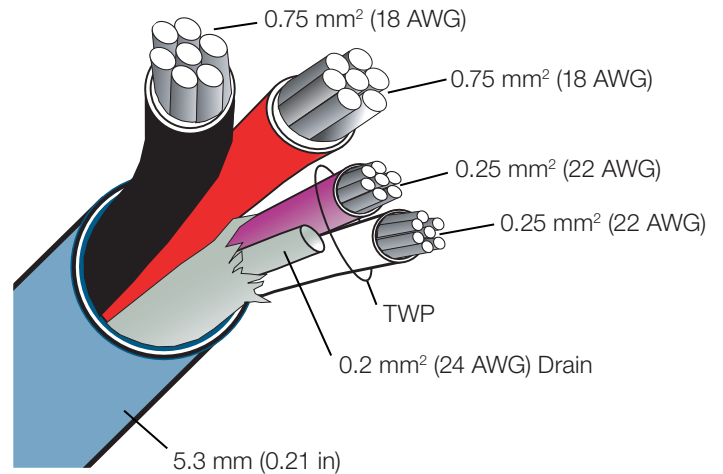

* Control link wiring distance maximums and other limitations for QS-CBL-LSZH cable are the same as those for GRX-CBL-346S cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

Lutron, Lutron, GRAFIK Eye, HomeWorks, and Quantum are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries. Energi Savr Node and myRoom are trademarks of Lutron Electronics Co., Inc.

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number: