

05.12.22

HomeWorks Sunnata Keypads


HomeWorks Sunnata keypads provide homeowners with a simple and elegant way to operate lights, shades/draperies, motorized screens, and many other devices.

Sunnata keypads feature large, easy-to-use buttons. LED bars on each button aid in locating the buttons in low light conditions. Keypads are available in a variety of finishes allowing the color to complement the aesthetics in a space.


Keypad markings are important for programming and use of the keypads when installed. The marking color has been chosen for increased readability. Default markings are provided as a standard while custom-personalization button kits can be designed to describe its programming and redeemed using the Lutron Designer software.

Personalized replacement button kits can be changed in the field, after installation. This allows for the keypad to be changed to a variety of finishes, colors, button configurations and personalized markings.

Use with Lutron Designer (Claro) wallplates. Wallplates are sold separately. Lutron Claro wallplates snap on with no visible means of attachment.







3-Button Keypad with Raise/Lower

4-Button Keypad

Model Numbers

HRST-W*	Configured Keypad
STBK-W*	Replacement Button Kit

* See page 5 for specification information.



Specifications

Model Numbers	Keypads: HRST-W
	Replacement Button Kits: STBK-W
Power	120-277 V∼ 50/60 Hz 0.25 A
Typical Power Consumption	0.25 W, 1.5 W Max Test conditions: All LEDs on, constant transmission
Regulatory Approvals	cULus, NOM, FCC, IC, IFT
Environment	Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing. Indoor use only.
Communications	Keypads communicate with the system through Clear Connect–Type X Radio Frequency (RF) and must be located within 75 ft (22.8 m) of a centrally located HomeWorks wireless processor/gateway. Each Sunnata keypad should have at least two other non-battery powered Clear Connect–Type X devices within 25 ft (7.6 m). Clear Connect– Type X devices include, for example, the HomeWorks wireless processor/gateway, Sunnata dimmers, Sunnata switches, and other Sunnata keypads. Companion dimmers/switches are not Clear Connect–Type X devices. System devices operate on a frequency of 2.4 GHz.
ESD Protection	Tested to withstand electrostatic discharge without damage or memory loss, in accordance with IEC 61000-4-2.
Surge Protection	Tested to withstand surge voltages without damage or loss of operation, in accordance with IEEE C62.41-1991 "Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits".
Power Failure	Power failure memory. Should power be interrupted, the keypad will return to its previous state when power is restored.
Mounting	Requires a U.S. wallbox. $3\frac{1}{2}$ in (89 mm) deep recommended, $2\frac{1}{4}$ in (57 mm) deep minimum.
Wiring	HomeWorks Sunnata keypads require a 120–277 V \sim hot and neutral wire connection.
Warranty	1-Year Limited Warranty www.lutron.com/TechnicalDocumentLibrary/warranty.pdf

Design Features

- At the press of a single button, lights fade ON or OFF to desired levels and shades/draperies open or close to desired positions.
- Light levels and shade/drapery positions can be fine-tuned by pressing and holding the raise/lower buttons.
- Programmable to select scene or room preset levels or positions.
- Adjustable status LED intensity through system level programming.
- * To see additional personalization options, please visit engraving.lutron.com/sunnata.

- Configurable raise/lower selection using programming software.
 - Last button pressed (default) devices controlled by the last button pressed will raise/lower.
 - Double-tap devices controlled by a double-tapped button will raise/lower.
 - Programmed devices only the devices programmed to the button will raise/lower.
- Keypads include one credit redeemable for a single custom personalization replacement button kit through the Lutron Designer software*.




3691205c 05.12.22

HomeWorks Sunnata Keypads

Dimensions


All dimensions are shown as in (mm)

Front View

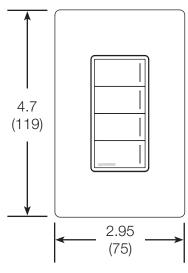




Mounting and Parts Identification

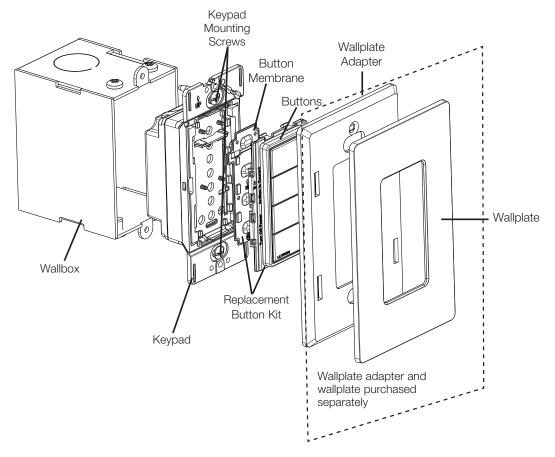




Operation

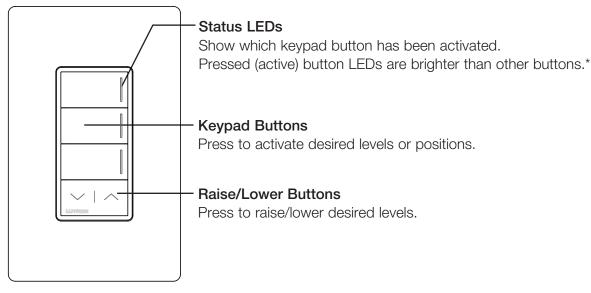

* This behavior is programmable in the system software.

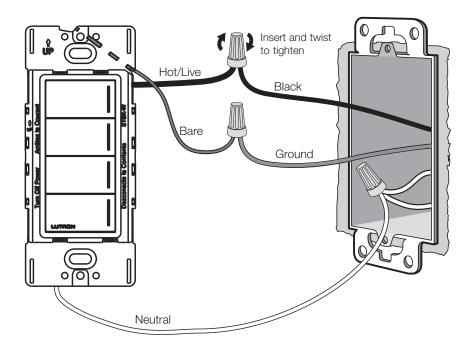



Wiring Diagram



Keypad Selection Guide

Component






Keypad


Button Kit

Button Configuration



2-Button

3-Button with Raise/Lower




4-Button


Keypad Selection Guide (continued)


Button Text/Icons

Lutron Defined (default)

Lutron defined marking text shown below. These keypad models include a redeemable personalization credit for ordering a custom-personalization button kit at a later time through the Lutron Designer software.







2-Button

3-Button with Raise/Lower

4-Button

Personalized (Replacement Button Kits)

Final personalization to be specified in myProjects. Visit engraving.lutron.com/sunnata for personalization options. Personalization must be defined at the time of order.

Note: Keypad and Button Kit orders cannot be manufactured until printing personalization is received.




05.12.22

HomeWorks Sunnata Keypads

Colors and Finishes

Gloss Finishes

Satin Finishes

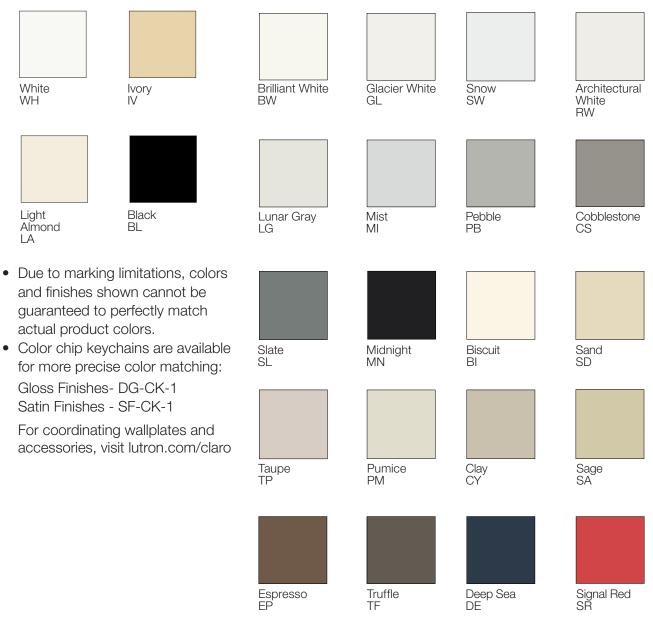

Lutron, HomeWorks, Sunnata and Claro are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.