

Lutron Digital LED Driver

Lutron DALI-2 digital LED drivers provide a high-performance tunable white and static white solution with single-address digital control.


Features

- UL® 8750 Listed Class P
- Configurable by the OEM with QwikFig Air for either tunable white (via DALI-2 type 8) or static white (via DALI-2 type 6) dimming mode
- Tunable white operates at 1% or higher. Static white operates at 0.1% or higher. See page 12 for more details *
- Dimming Method:
 - Constant-current reduction (CCR) dimming to 200 mA
 - Pulse-width modulation (PWM) dimming below 200 mA
 - PWM Frequency = 3.6 kHz
 - Outputs of the two channels are synchronized
- Integrated Bus Power Supply: **
 - Can provide power to compatible devices via the DALI terminals
 - Up to 3 drivers can supply the link simultaneously
 - Integrated power supply is disabled by default. OEM can configure drivers to have power supply enabled as needed
- Driver consumes one digital address, encompassing intensity and color temperature
- Guaranteed performance and compatibility when used with Lutron DALI-2 controls.
- Rated lifetime of 50,000 hours at 167 °F (75 °C) calibration point (t_c) for W case and 158 °F (70 °C) calibration point (t_c) for YN/YS case
- FCC Part 15 Class B
- 100% performance tested at factory before shipping
- RoHS compliant
- For more information please visit: www.lutron.com

* Light output at low-end depends on the efficacy of the LED light engine used with the driver.


** For compatible Lutron digital controllers only. See page 12 for more details.

***Not compatible with HomeWorks digital. For information on HomeWorks digital refer to the HomeWorks Digital Power Module Spec Submittal (Lutron P/N 3691217) at www.lutron.com




Case Type W

1.18 in (30 mm) W x 0.83 in (21.0 mm) H x 16.06 in (408 mm) L

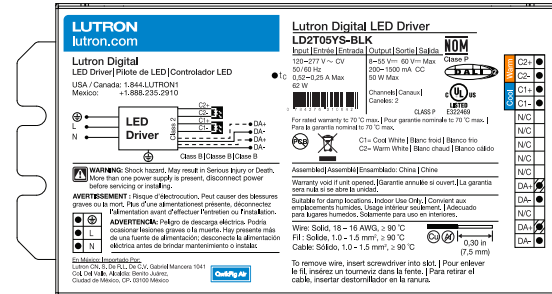

Case Type YS (with studs)

3.0 in (76.0 mm) W x 1.14 in (29.0 mm) H x 5.91 in (150.0 mm) L

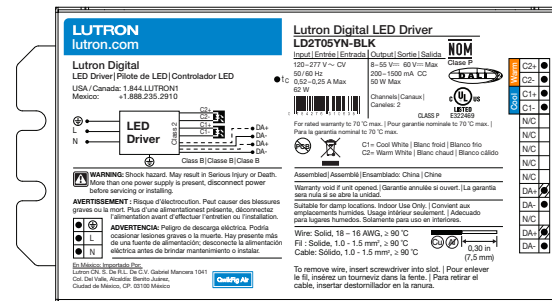

Case Type YN (without studs)

3.0 in (76.0 mm) W x 1.14 in (29.0 mm) H x 5.91 in (150.0 mm) L

DALI Link Features ***

- Simpler to wire and more reliable than 0–10 V==
- Guarantees compatibility between Lutron DALI-2 controllers and Lutron DALI-2 LED drivers
- Accommodates zone and control changes without rewiring
- Topology-free
- Non-volatile memory restores all settings after power failure

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:

Model Numbers:

Job Number:

Specifications

Regulatory Approvals and Compliance

- cULus Listed Class P
- NOM certified
- Lutron Quality Systems registered to ISO 9001.2015
- Inrush current less than NEMA 410-2011 limit
- FCC Part 15 Class B
- Meets UL® 8750, “Light Emitting Diode (LED) Equipment For Use in Lighting Products”
- Class 2 outputs
- Compliant with performance criteria for ENERGY STAR for Luminaires Version 2.1 in designated areas (see Load Compatibility graph in Output Ranges page 6)
- Compliant with DLC version 4.3 in designated areas (see **Load Compatibility** graph in Output Ranges page 6) (for W case only)
- DALI-2 certified:
 - IEC62386-101 (General Requirements - System Components)
 - IEC62386-102 (General Requirements - Control Gear)
 - IEC62386-207 (LED Modules)
 - IEC62386-209 (Tc - Tunable White)

Performance

- Dimming Range: 100% to 0.1%¹
- Operating Voltage: 120 V \sim /277 V \sim at 50/60 Hz
- Lifetime: 50,000 hours when calibration point (t_c) at 167 °F (75 °C) for W case and 158 °F (70 °C) for Y case²
- For rated warranty, t_c not to exceed 167 °F (75 °C) for W case and 158 °F (70 °C) for Y case (maximum rated temperature)²
- At turn on, lighting fades smoothly to the desired level
- Typical standby power consumption: < 0.5 W at 120 V \sim /277 V \sim
- Open-circuit protected output
- Short-circuit protected output
- Over temperature protected

Environmental

- Relative Humidity: maximum 90% non-condensing
- Minimum Operating Ambient Temperature: $t_a = 0$ °C (32 °F)³
- Indoor use only
- Rated for dry and damp locations

OEM Notes

- For best dimming performance, Lutron recommends electrical insulation with 50/60 Hz impedance of at least 12 M Ω and minimum breakdown voltage of at least 1500 V \sim between LEDs and fixture chassis
- Lutron digital LED drivers are only available in bulk (BLK) models to be configured by the fixture OEM using QwikFig Air.

Driver Wiring and Mounting

- For use with static white loads, wire the LED light engine to output channel 2 (C2+ and C2-)
- Driver is grounded by a mounting screw to the grounded fixture or by a terminal connection
- Digital link can be wired Class 1 or Class 2
- It is possible to daisy-chain the DALI link using the second set of terminal blocks. See example on page 13
- Fixture must be grounded in accordance with local and national electrical codes
- The positive terminals of both output channels are electrically connected inside the driver. This supports the use of common anode loads
- Terminal blocks on the driver accept one solid wire per terminal from 18 AWG to 16 AWG (0.75 mm² to 1.5 mm²)
- Maximum driver-to-LED light engine wire length for:

Wire Gauge	Maximum Lead Length		
	150 mA to 700 mA	710 mA to 1.50 A	1.51 A to 2.10 A
18 AWG (0.75 mm ²)	30 ft (9 m)	15 ft (4.5 m)	10 ft (3 m)
16 AWG (1.5 mm ²)	35 ft (10.5 m)	25 ft (7.5 m)	15 ft (4.5 m)
14 AWG (2.5 mm ²) ⁴	50 ft (15 m)	40 ft (12 m)	25 ft (7.5 m)
12 AWG (4.0 mm ²) ⁴	100 ft (30 m)	60 ft (18 m)	40 ft (12 m)

¹ Tunable white operates at 1% or higher. Static white operates at 0.1% or higher. Light output at low-end depends on the efficacy of the LED light engine used with the driver.

² To maintain warranty, installer is responsible for ensuring that the driver calibration point does not exceed 167 °F (75 °C) for W case and 158 °F (70 °C) for Y case.

³ Where t_a is the temperature of the air directly surrounding the driver.

⁴ Terminal blocks on the drivers accept only solid 18 AWG to 16 AWG (0.75 mm² to 1.5 mm²) wire. To use wire gauges larger than the terminal blocks' rated gauge of 16 AWG (1.5 mm²), connect up to 3 ft (1.0 m) of 18 AWG to 16 AWG (0.75 mm² to 1.5 mm²) wire to the LED driver terminal blocks, then connect 12 AWG or 14 AWG (4.0 or 2.5 mm²) up to the length allowed in the above table.

Job Name:

Model Numbers:

Job Number:

How to Determine Compatibility Between an LED Driver and LED Load

1. Review the specifications of the LED load.
2. Identify the minimum and maximum operating voltage of the LED load at the desired operating current. This "current" will be the rated output current of the LED driver. Consult the LED load manufacturer for any questions.

Example: An LED load that is rated at 0.7 A and 30 V nominally, has an input (forward) voltage range of 25–35 V (at 0.7 A) due to unit-to-unit variation, temperature, etc.
3. Examine the LED driver load compatibility graphs below for each output range to ensure that the voltage range of the LED load is within the load compatibility range.


Example: Lines* marked below indicate two load specifications:

Load A (25 – 35 V) at 0.5 A

Load B (25 – 35 V) at 0.7 A

Load A (Compatible) ✓


Operating voltage range for load A is 25 – 35 V at 0.5 A. Since the load specifications are within the operating range, the combination of LED load and LED driver is compatible.

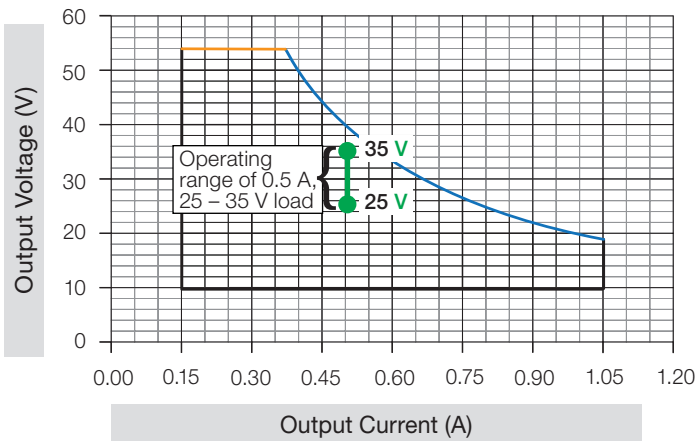

Key: — Constant 20 W output — Constant 54 V output

Load B (Not Compatible) ✗

Since the maximum voltage of the load, 35 V, exceeds the 28.5 V allowable at 0.7 A, this combination of LED load and LED driver is not compatible.

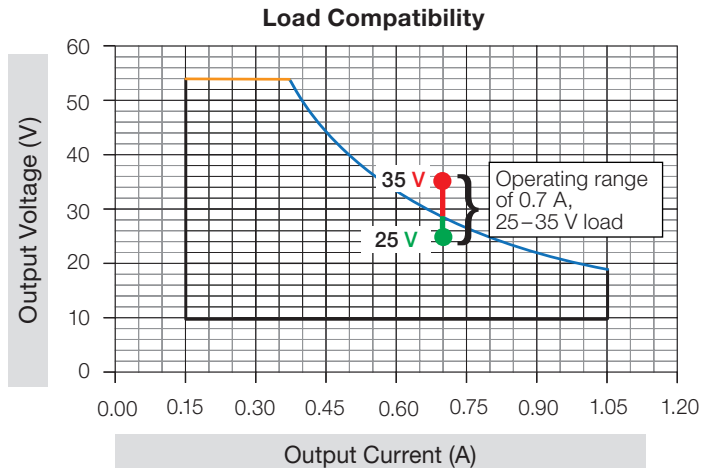

Key: — Constant 20 W output — Constant 54 V output

4. The [LED Driver Selection Tool](http://www.lutron.com/drivers) (www.lutron.com/drivers) is a website compatibility tool that allows for a fast compatibility search of all Lutron LED drivers that are compatible with an LED load.
5. See **Lutron Digital LED Driver Model Number** to create the appropriate model number for the desired driver. Lutron digital LED drivers are only available in bulk (BLK) models to be configured by the fixture OEM using QwikFig Air.

* Lines are an example and not the range of the Lutron digital LED driver.

Job Name:	Model Numbers:
Job Number:	

Lutron Digital LED Driver Model Number

LD2T0 - BLK




**LED Load Output Range:
Class 2 Constant Current**

(see the following pages for more detail)



- 5: 50 W Max, 0.20 – 1.50 A, 8 – 55 V^{***}

Case Type



- **WN:** W Case Type
- **YS:** YS Case Type (with studs)
- **YN:** YN Case Type (without studs)



W-case type

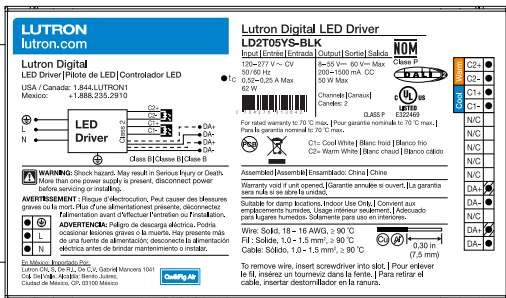

YS-case type

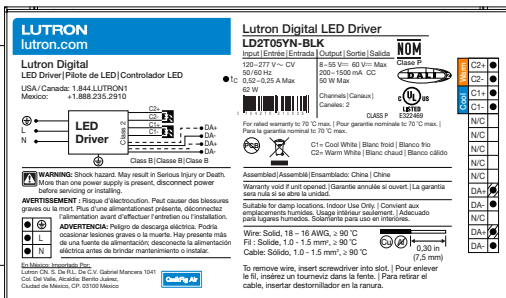



YN-case type

* Output voltage range changes with output current and according to power limits. Check driver specifications on the following pages carefully to understand output voltage range of a particular SKU. Purchaser is responsible for electrical compatibility between LED driver and LED load.

LUTRON SPECIFICATION SUBMITTAL

Job Name:	Model Numbers:
Job Number:	

50 W Output Range

	Driver Type	Output Voltage	Output Current	Output Power	Standards Recognition	Maximum Rated Temp. @ t_c for Warranty
W-Case	Constant Current Driver (Class 2)	8–55 V $\overline{=}$	0.20–1.50 A*	50 W**	 US LISTED CLASS P E322469	75 °C
YN/YS-Case	Constant Current Driver (Class 2)	8–55 V $\overline{=}$	0.20–1.50 A*	50 W**	 US LISTED CLASS P E322469	70 °C

* Configurable with QwikFig Air by the OEM to any current within this range in 0.005 A increments.


** Each channel is capable of delivering 50 W. The combined output of both channels shall not exceed 50 W total.

Job Name:	Model Numbers:
Job Number:	

50 W Output Range *(continued)*

Typical Performance Specifications


Load Compatibility

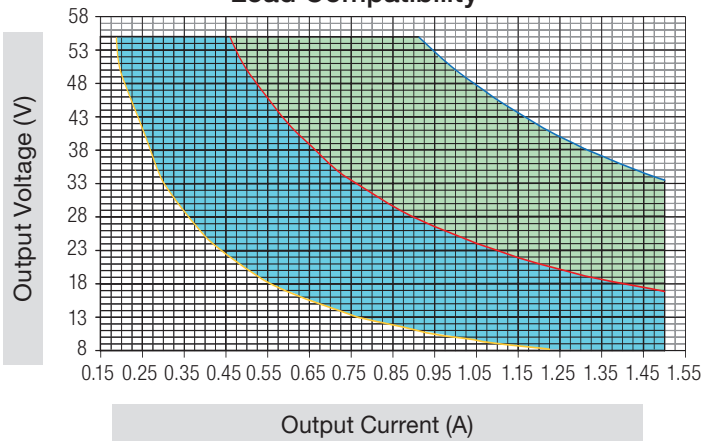

Key:

- Constant 25 W output (red line)
- Constant 50 W output (blue line)
- Constant 10 W output (orange line)
- Shaded area meets both ENERGY STAR Luminares V2.1 Specification and DLC Version 4.3 (W case only). Areas outside of shaded areas may not meet THD or PF requirements.
- Shaded area meets only ENERGY STAR Luminares V2.1 Specification. Areas outside of shaded areas may not meet THD or PF requirements.


Typical THD vs Total Power Output

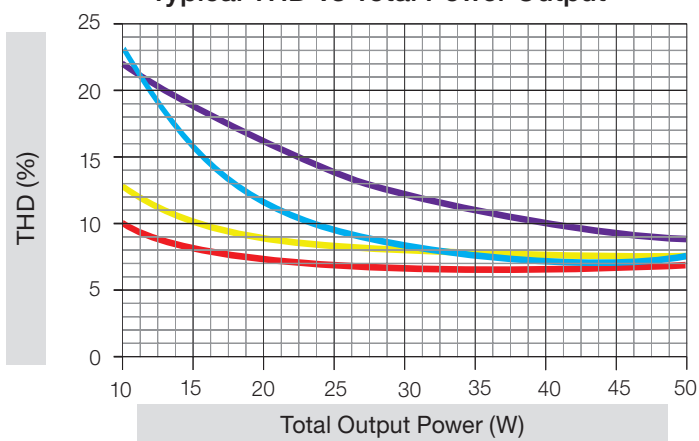

Key:

- W Case: 120 V~ (red line), 277 V~ (blue line)
- YS/YN Case: 120 V~ (yellow line), 277 V~ (purple line)


Typical Power Factor vs Total Power Output

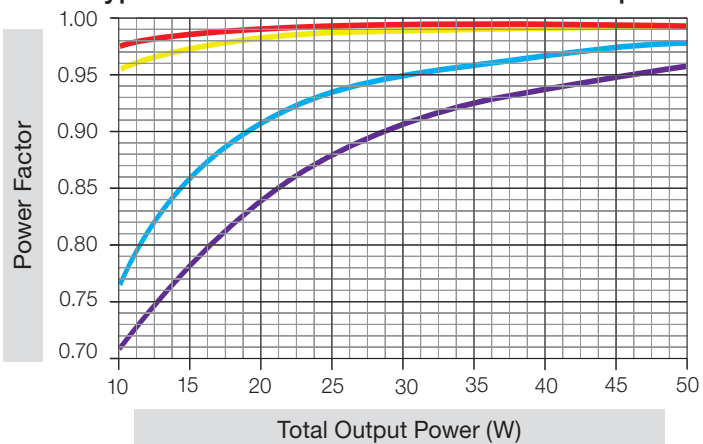

Key:

- W Case: 120 V~ (red line), 277 V~ (blue line)
- YS/YN Case: 120 V~ (yellow line), 277 V~ (purple line)

Typical Efficiency vs Output Current

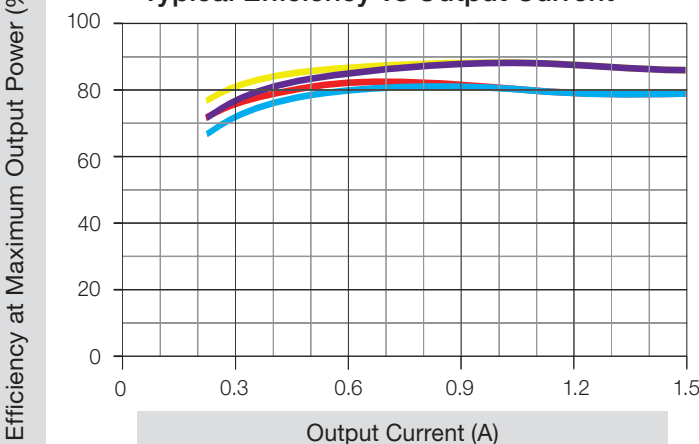

Key:

- W Case: 120 V~ (red line), 277 V~ (blue line)
- YS/YN Case: 120 V~ (yellow line), 277 V~ (purple line)

Job Name:	Model Numbers:
Job Number:	


Example of Performance Specifications:

	Parameter	277 V~		120 V~	
		Value	Test Conditions	Value	Test Conditions
W-Case	Input Current	0.22 A	$V_i = 277\text{ V}\sim$ $t_a = 25\text{ }^\circ\text{C}$ $I_o = 0.90\text{ A}$ $V_o = 55\text{ V}\text{---}$	0.51 A	$V_i = 120\text{ V}\sim$ $t_a = 25\text{ }^\circ\text{C}$ $I_o = 0.90\text{ A}$ $V_o = 55\text{ V}\text{---}$
	Power Factor (PF)	0.97		0.99	
	Total Harmonic Distortion (THD)	9%		8%	
	Driver Efficiency	86%		86%	
YN/YS-Case	Input Current	0.23 A	$V_i = 277\text{ V}\sim$ $t_a = 25\text{ }^\circ\text{C}$ $I_o = 0.90\text{ A}$ $V_o = 55\text{ V}\text{---}$	0.51 A	$V_i = 120\text{ V}\sim$ $t_a = 25\text{ }^\circ\text{C}$ $I_o = 0.90\text{ A}$ $V_o = 55\text{ V}\text{---}$
	Power Factor (PF)	0.96		0.99	
	Total Harmonic Distortion (THD)	7%		7%	
	Driver Efficiency	86%		86%	


Job Name:	Model Numbers:
Job Number:	

W Case Dimensions

All measurements shown as: in (mm)

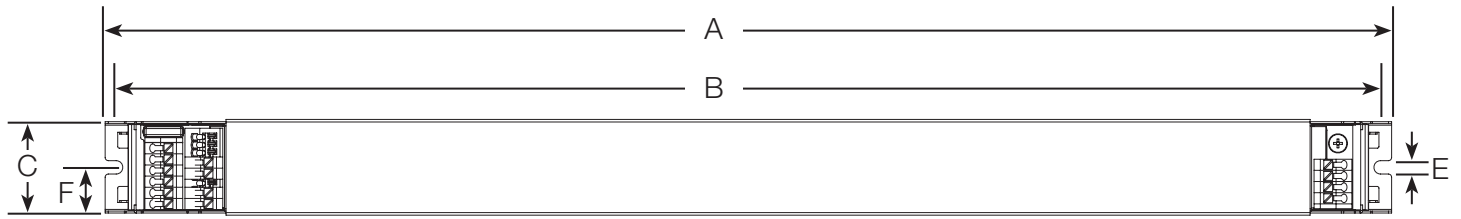


A = 16.06 (408)
B = 15.79 (401)
C = 1.18 (30)
D = 0.827 (21)
E = 0.165 (4)
F = 0.59 (15)

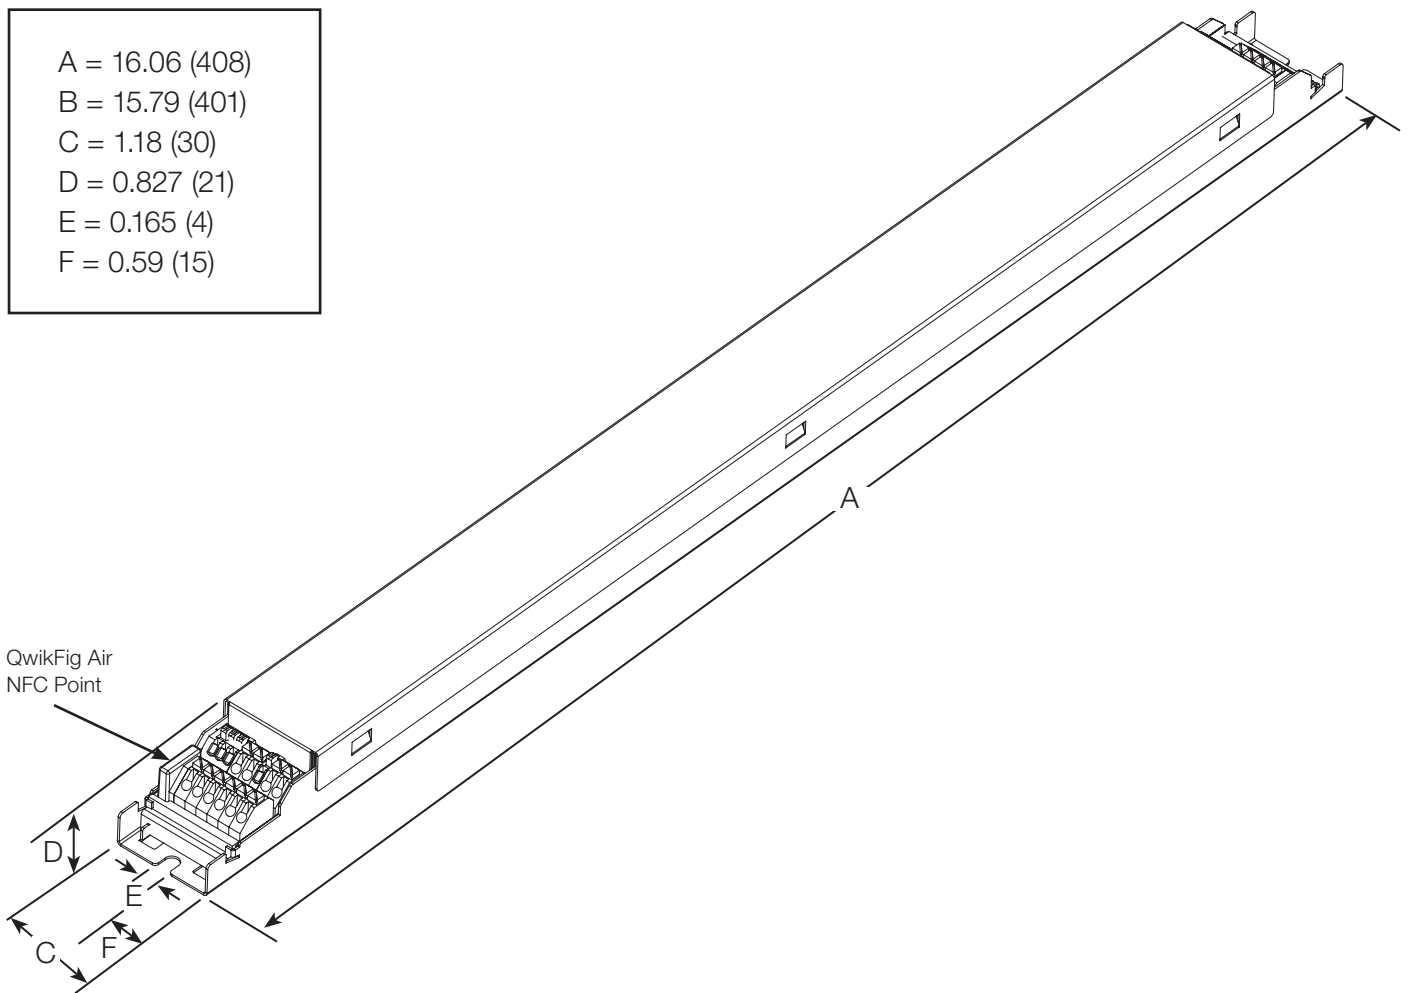

Job Name:	Model Numbers:
Job Number:	

YS Case (with studs) Dimensions


All measurements shown as: in (mm)

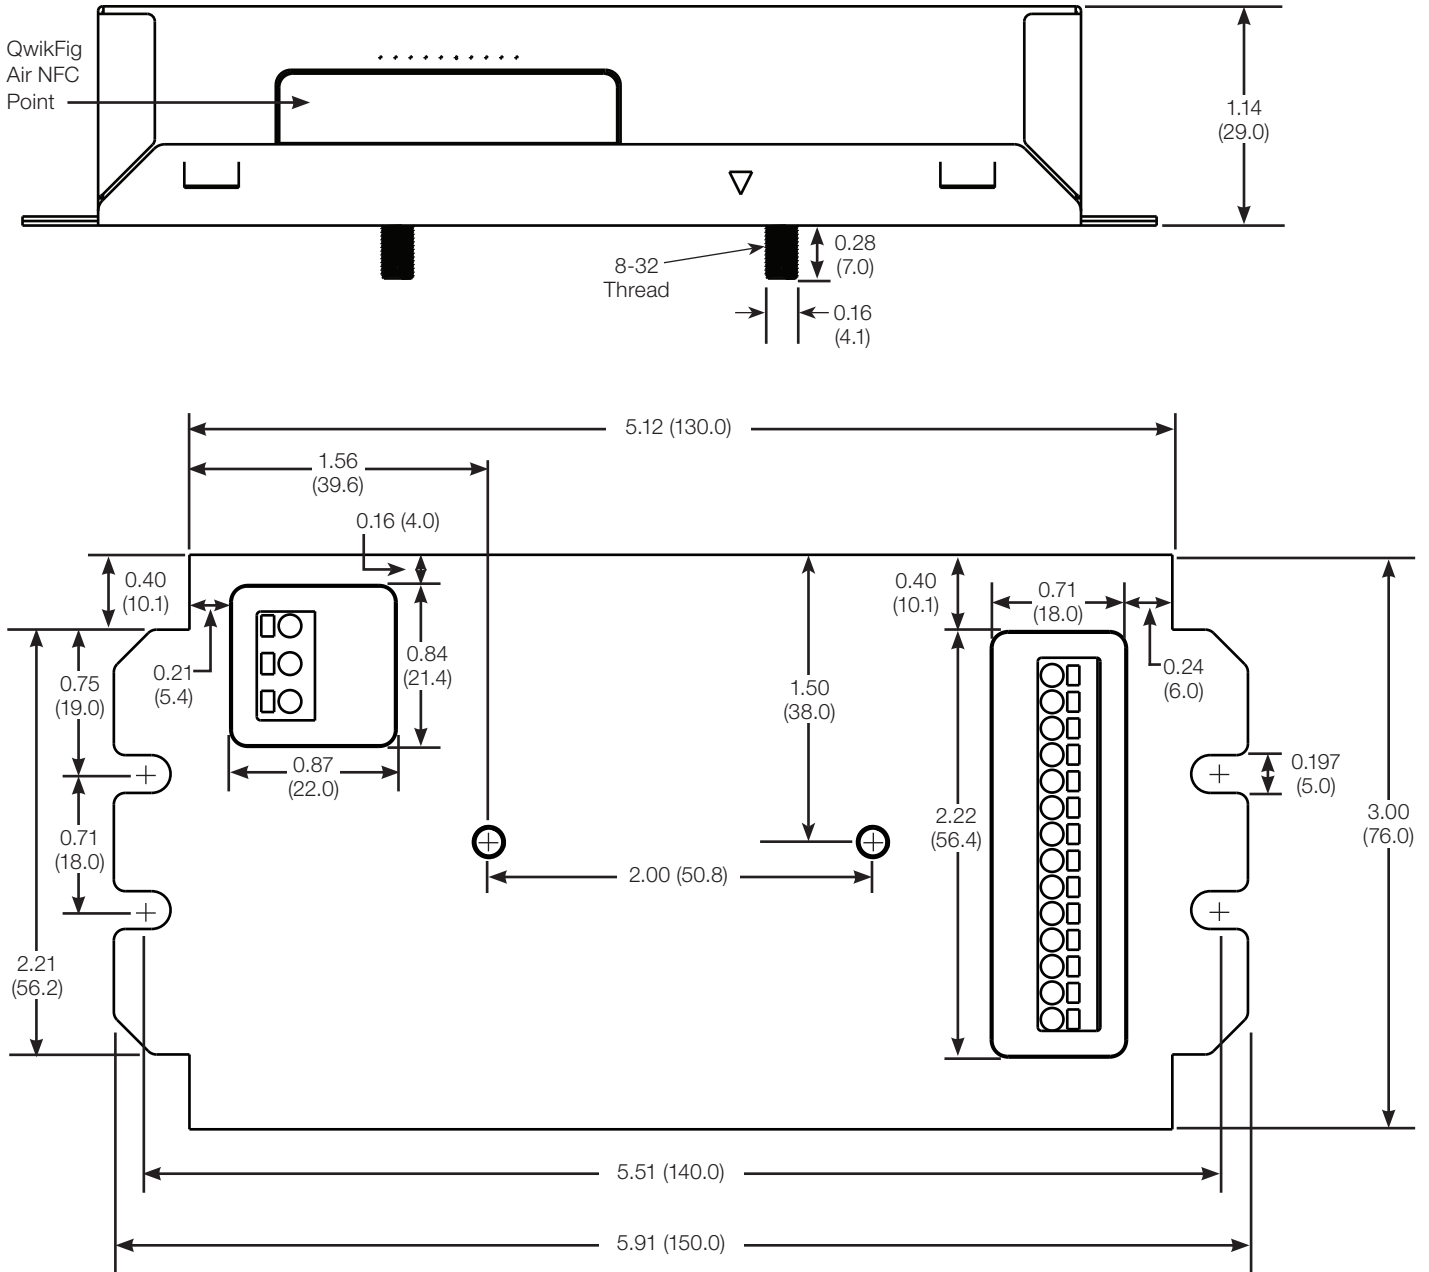

Job Name:	Model Numbers:
Job Number:	

YN Case (without studs) Dimensions


All measurements shown as: in (mm)

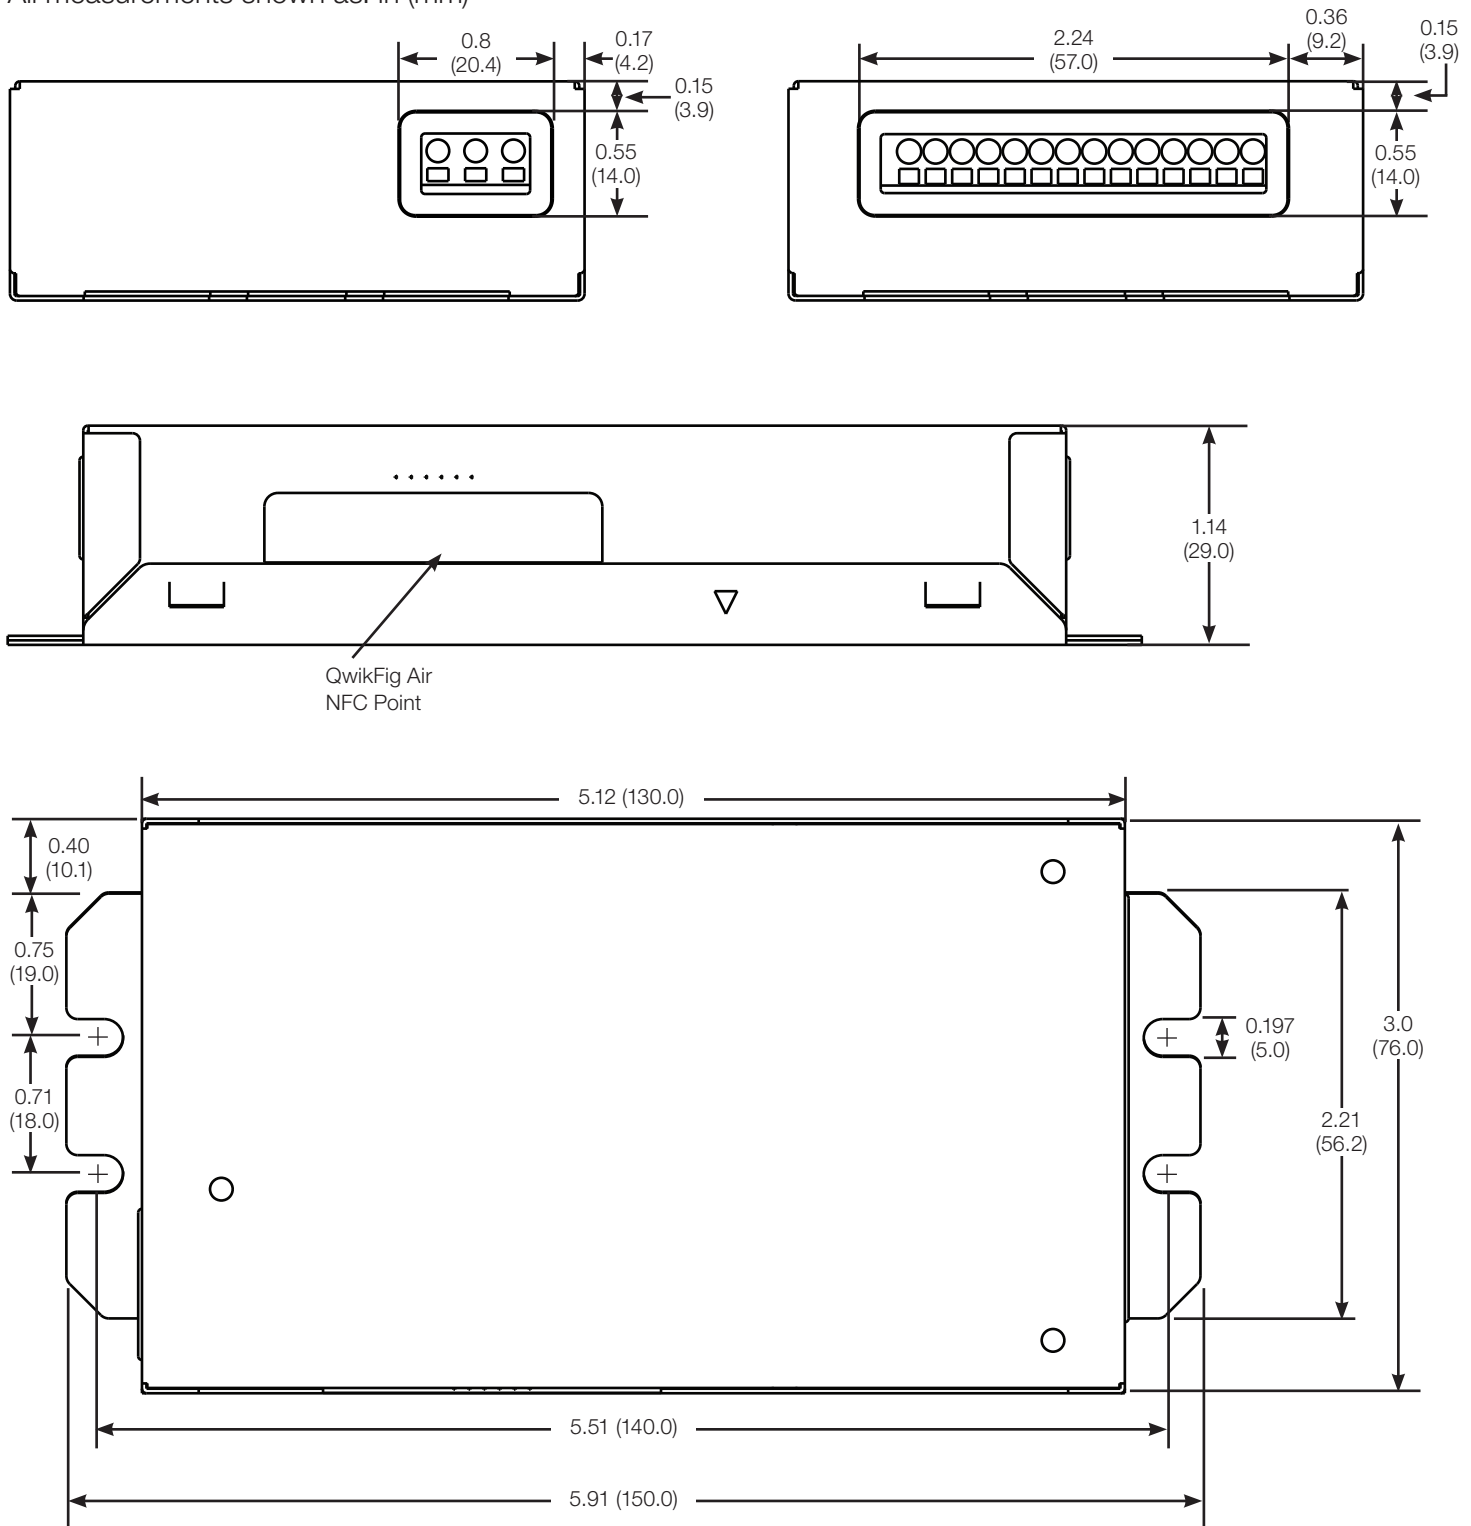

Job Name:	Model Numbers:
Job Number:	


Wiring Diagram

Tunable White

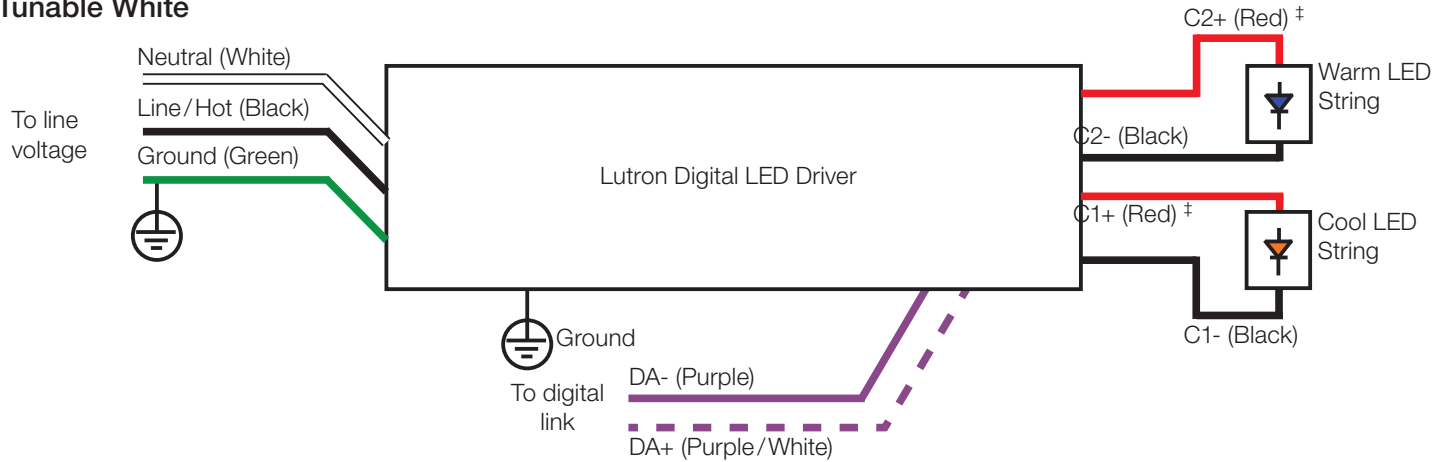

† C1+ and C2+ are electrically connected inside the driver. This supports the use of common anode loads.

Static White

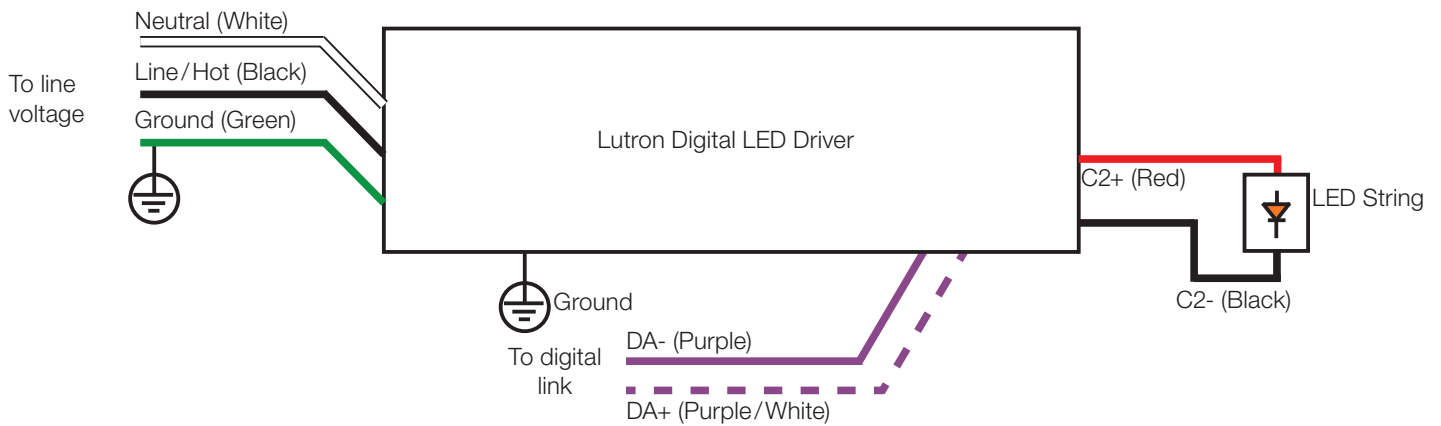

Job Name:	Model Numbers:
Job Number:	


Static White Considerations

- The driver will consume one digital address for intensity control.
- Static white LED light engines must be wired to channel 2. Channel 1 is not used for static white applications.
- The driver default minimum intensity level for static white mode is set to 0.1%

Tunable White Considerations

- The driver will consume one digital address, encompassing intensity and color temperature.
- The highest kelvin light source must be connected to channel 1 (cool white).
- The lowest kelvin light source must be connected to channel 2 (warm white).
- The driver can accept LED light sources with a physical CCT value between 1500 K and 6500 K.
- The driver default minimum intensity level is set to 1% for tunable white. See **Tunable White Capability** diagram to the right for more information.
- For optimal tunable white performance, it is recommended to set high-end and low-end logical trims which reduce the overall CCT range to less than the maximum capability of the light source.

Tunable White Capability

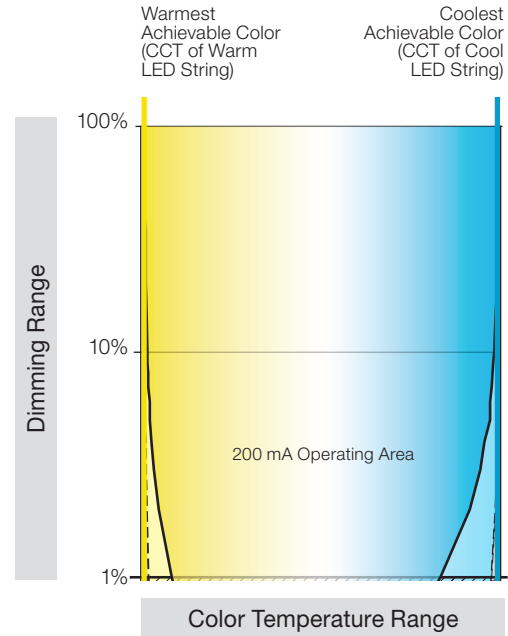

Compatible Controls: Lutron DALI Digital Controls

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at **1.877.346.5338** or **LEDs@lutron.com**

Lutron Digital Compatible Controls	Digital Bus Power Supply Configuration Status
DALI-2 Controller without DALI Link Power Supply ¹	Enabled ²
DALI-2 Controller with DALI Link Power Supply ³	Disabled

¹ e.g., Athena Wireless Node (A-WN-D01-RF/OCC)

² Supports up to 3 drivers with enabled DALI link power supplies. Any additional drivers must be configured with the power supply disabled

³ e.g., DALI Universal Energi Savr Node (QSN-2DALUNV-D/S)

Job Name:	Model Numbers:
Job Number:	


Lutron Digital LED Driver Wiring

DALI Link Overview

- The DALI wiring (DA+ and DA-) connects the digital ballasts and drivers together to form a lighting control system.
- DA+ and DA- can be wired in any topology (e.g., T-tap and daisy-chain).
- Power may be supplied to the DALI link from the control system or from the driver power supply.
- **When multiple power supplies are enabled on the DALI link, the DA+ and DA- terminals must connect to positive and negative terminals respectively.**
- **Guaranteed 15 V_{DC} 50 mA DALI output, max 68 mA. When used with the Athena wireless node, no more than 3 drivers can have the power supply enabled.**
- **Bus supply must be disabled on the drivers when they are not supplying power to the DALI link.**
- Short circuit protection with automatic re-start.

DALI Wiring

- Ensure that the supply breaker to the drivers is OFF when wiring.
- When connected to controllers that require power, the DALI link should not receive more than 250 mA from drivers.
- Connect the two conductors to the two driver terminals DA+ and DA- as shown.
- Using two different colors for DA+ and DA- will reduce confusion when wiring several drivers together.
- There are two sets of DALI link terminal blocks to support daisy chaining the link.
- The DALI link may be wired Class 1 or Class 2. Consult applicable electrical codes for proper wiring practices.
- For additional details on emergency applications see Lutron Application Note #106 (P/N 048106 at lutron.com)

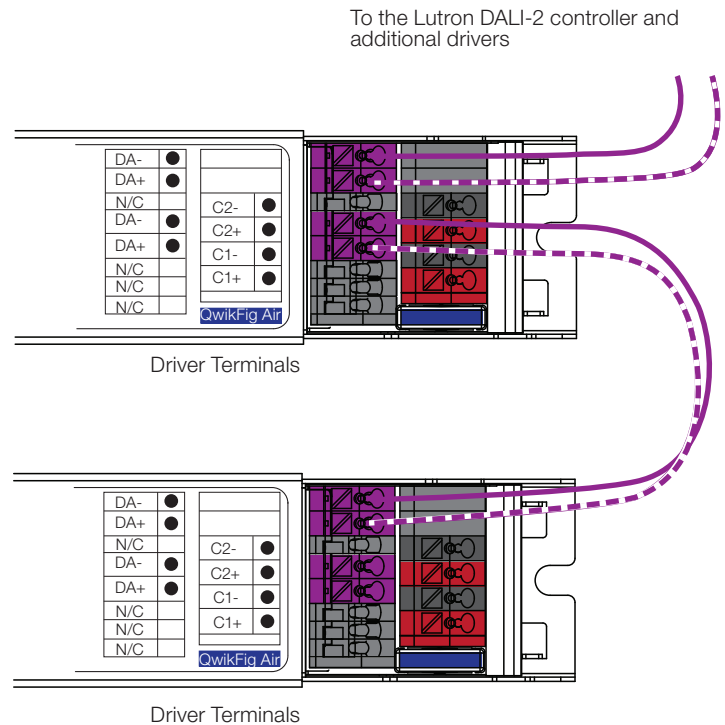

Notes

- The control device and/or supply does not have to be located at the end of the DALI link.
- The table below gives the limits for each of the wires in the DALI link pair.
- The DALI link length is limited by the wire gauge used for DA+ and DA- as follows:

Wire Gauge	Maximum Wire Length
18 AWG (0.75 mm ²)	679 ft (207 m)
16 AWG (1.5 mm ²)	984 ft (300 m)
14 AWG (2.5 mm ²)**	1000 ft (305 m)*
12 AWG (4.0 mm ²)**	1000 ft (305 m)*

* Do not exceed cable lengths of 1000 ft (305 m).

** Terminal blocks on the drivers accept only solid 18 AWG to 16 AWG (0.75 mm² to 1.5 mm²) wire. To use wire gauges larger than the terminal blocks' rated gauge of 16 AWG (1.5 mm²), connect up to 3 ft (1.0 m) of 18 AWG to 16 AWG (0.75 mm² to 1.5 mm²) wire to the LED driver terminal blocks, then connect 12 AWG or 14 AWG (4.0 mm² or 2.5 mm²) up to the length allowed in the above table.

Job Name:

Model Numbers:

Job Number:

Service

Warranty

For warranty information, please visit www.lutron.com/driverwarranty

Replacement Parts

When ordering Lutron replacement parts, please provide the full model number. Consult Lutron if you have any questions.

Further Information

For further information, please visit us at www.lutron.com or contact our LED Control Center of Excellence at 1.877.346.5338 or LEDs@lutron.com

The Lutron logo, Lutron, Athena, Energi Savr Node, HomeWorks, QwikFig, and QwikFig Air are trademarks or registered trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries.

All other product names, logos, and brands are property of their respective owners.

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name: Job Number:	Model Numbers:
--	-----------------------