


Wireless Hospitality Keypads

Wireless hospitality keypads work with the Lutron myRoom guestroom solution providing a flexible and easy to use device that allows the user to adjust lights and shades at the touch of a button. The battery-operated keypad requires no external power or communication wiring.

Features

- Keypads available in a variety of button marking options.
- Keypads available select Satin Colors finishes.
- Utilizes Lutron reliable Clear Connect RF technology.
- Battery-powered. Requires no wiring.
- 10 year battery life¹ (one CR2032 battery included).
- Can provide control of lighting devices, shades, or drapes within a range of 30 ft (9 m) through walls and 60 ft (18 m) line-of-sight.
- Each button is individually programmable using the system’s app or programming software.

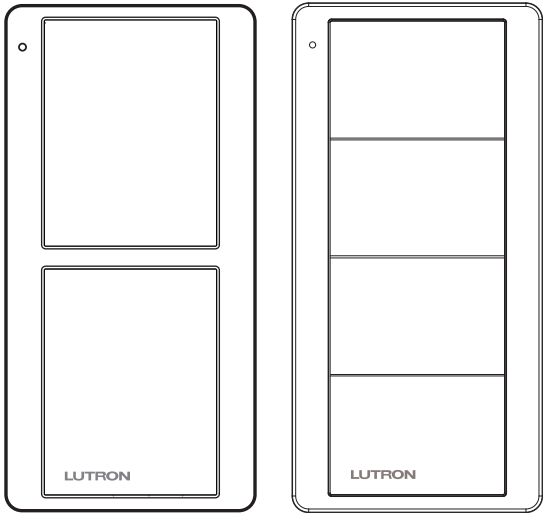

Pico Scene Keypads

¹ Based on a 1 year shelf life, an average of 10 button presses per day, and an ambient temperature of 86 °F (30 °C). Actual life may vary based on usage and environmental conditions.

Specifications

Regulatory Approvals

- Lutron Quality Systems registered to ISO 9001.2015
- PJ2- (North and South America)
 - FCC Certified (U.S.A)
 - IC Certified (Canada)
 - COFETEL Certified (Mexico)
 - SUTEL Certified (Costa Rica)
 - Anatel Certified (Brazil)
- PK2- (Europe)
 - CE Marked
 - TRA Certified
- PN2- (India)
 - WPC Certified
- PM2- (China)
 - imDA Certified
- PQ2- (Hong Kong)
 - RCM Compliant
- RoHS Compliant

Power

- Operating Voltage 3 V==
- (1) CR2032 battery (included)

System Communication and Capacity

- Communicates using Radio Frequency (RF) at 434 MHz (PJ2- models), 434 MHz Limited (PQ2- models), 865 MHz (PN2- models), 868 MHz (PK2- models), and 868 MHz Limited (PM2- models).
- Thousands of system addresses prevent interference between systems.
- Can be assigned to control lighting devices, shades, or drapes within a range of 30 ft (9 m) through walls and 60 ft (18 m) line-of-sight.

Mounting Considerations

- All RF devices must be mounted on non-conductive materials to ensure proper performance.
- Mounting of any RF devices on or in close proximity to a metal surface will drastically reduce the effective range of radio signal transmission or reception.
- If you wish to mount your Pico wireless keypad to a metal surface, the PICO-MOUNT-XX-CPN6774¹ will be required in order to maintain proper RF performance. For availability, please contact your local Lutron sales office.
- Wall mounting adhesive included. See **Mounting Options** section for other options.


Environment

- Ambient operating temperature: 32 °F to 140 °F (0 °C to 60 °C)
- Maximum 90% non-condensing relative humidity
- Indoor use only

Warranty

- 1 Year Limited Warranty. For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

¹ PICO-MOUNT-XX-CPN6774 is only available in gloss finish, White (WH) or Black (BL).



SPECIFICATION SUBMITTAL


Page

Job Name:	Model Numbers:
Job Number:	


Dimensions

Measurements shown as: in (mm)


Front view

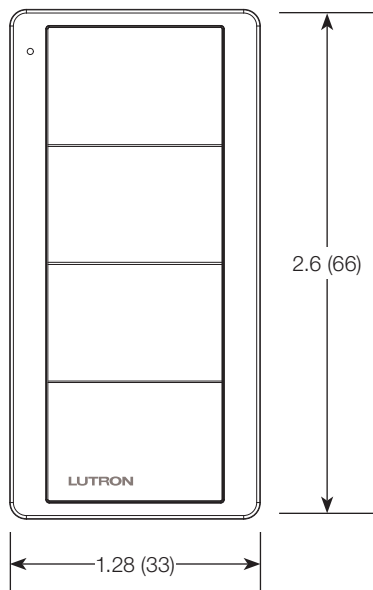


Side view



Front view

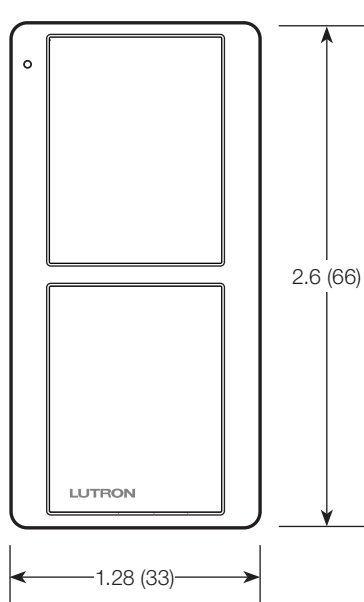


Side view



Operation

Indicator LED

Flashes to indicate a button press or when unit is in programming mode.




Job Name:

Model Numbers:

Job Number:

Model Number

Standard Icon Models

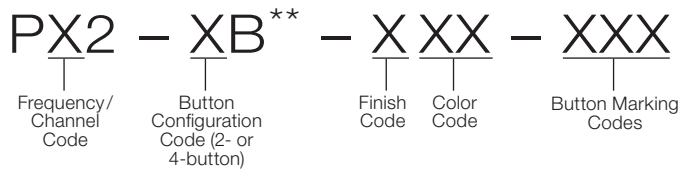

** If blank= single (ex. PJ2-2B-TSW-H01), if 96= multi pack of 96 units (ex. PJ2-2B96-TSW-H01).

Frequency/Channel Codes

Code	Frequency Range	Geographic Region
J	431.0 – 437.0 MHz	North and South America
K	868.0 – 869.8 MHz	Europe, U.A.E.
M	868.0 – 868.5 MHz	China, Singapore
N	865.5 – 866.5 MHz	India
Q	433.0 – 434.7 MHz	Hong Kong, Macau

Finish Code

Finish	Code
Textured	T

Color Code: Textured (Satin Colors)

(Available for PJ2- models only.)

Color	Finish Code	Color Code
Snow	T	SW
Midnight	T	MN
Biscuit	T	BI


Color Code: Textured Colors

(Available for PK2, PQ2, PM2, and PN2 models only.)


Color	Finish Code	Color Code
Artic White	T	AW
Black	T	BL

* Contact Lutron for frequency band compatibility for your geographic region. All wireless devices need to be the same frequency band for proper operation.


Button Marking Codes




-H01; On/Off Keypad




-H02; Nightlight Keypad




-H03; 3 Scene Keypad




-H04; Raise/Lower Keypad




-H05; Drape Keypad




-H06; 3 Scene NL Keypad



-H07; Blinds Keypad



-H08; Drape Adjustment Keypad



-H09; 2-Group Drape and Blind Keypad

SPECIFICATION SUBMITTAL

Page

Job Name:

Job Number:

Model Numbers:

Mounting Options

Standalone Mounting:
Adhesive-Mount

Included with Pico
wireless keypad



Standalone Mounting:
Screw-Mount

Model PICO-SM-KIT
(sold separately)


Kit includes special screws
to be used for more
permanent mounting and/or
for non-smooth surfaces.



Wallbox Adapter

Model PICO-WBX-ADAPT
(sold separately)

Wallplate adapter / wallplate
sold separately.

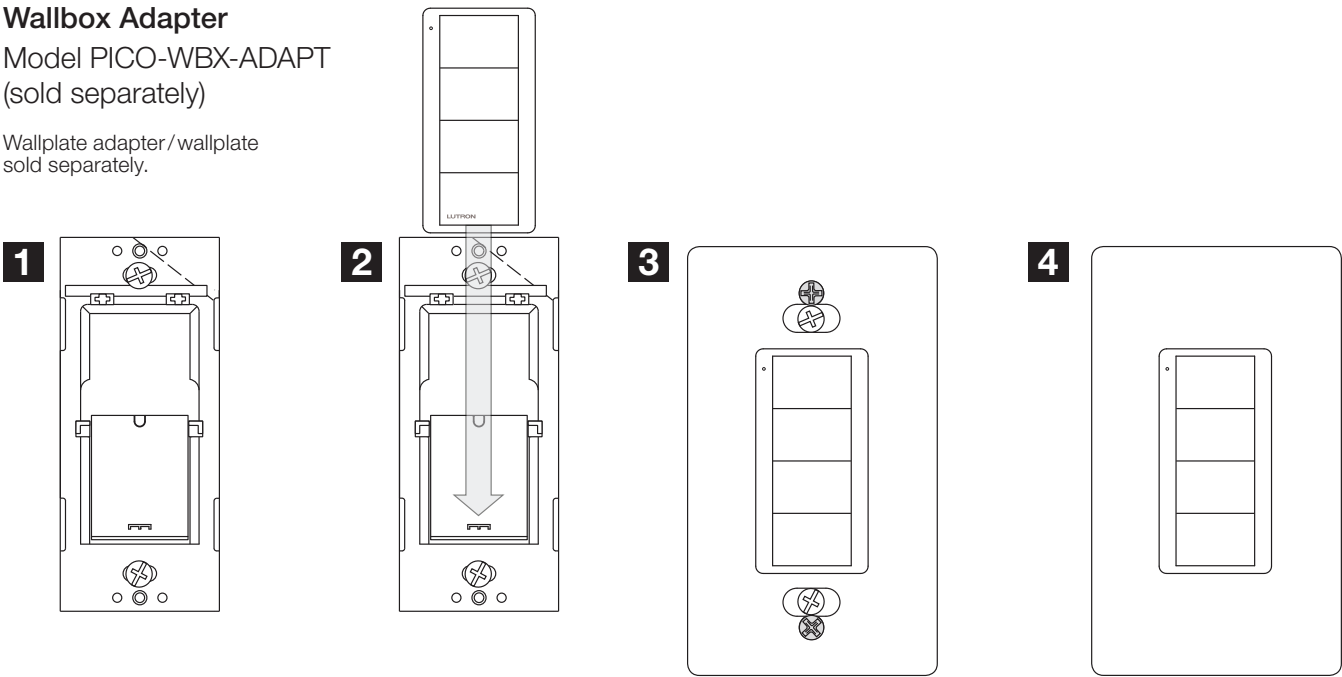


Mounting Options (continued)

Metal Surface Mounting


Model:
PICO-MOUNT-XX-CPN6774¹
(sold separately)

Contact your local Lutron sales office.

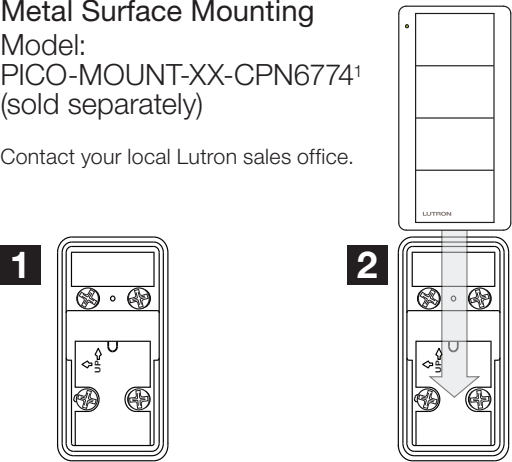

¹ PICO-MOUNT-XX-CPN6774 is only available in gloss finish, White (WH) or Black (BL).

Lutron, Lutron, Pico, RadioRA, Clear Connect, HomeWorks, Caséta, myRoom, RadioRA 2, RA2 Select, and Satin Colors are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

 SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	