

Diva LED+ Dimmer with Night Mode

Provides effortless illumination, perfected for nighttime—the Diva LED+ dimmer with Night Mode intelligently adjusts its fade speed based on ambient light, creating a softer transition in the dark for a more comfortable experience.

Features


- Large paddle switch with a captive, backlit, linear-slide dimmer for a standard designer wallplate opening.
- LED+ includes the most advanced technology for superior dimming of LED, halogen, and incandescent bulbs.
- Hidden ambient light sensor automatically adjusts how the dimmer behaves in the dark.
- UL Listed to control:
 - Dimmable LEDs
 - Halogen
 - Incandescent
- Low-end adjustment to accommodate a wide range of bulbs.
- Includes Front Accessible Service Switch (FASS) for safe lamp replacement.
- 100% factory tested.
- Coordinating Claro wallplate available separately.

Application Requirements

- ***When dimming LEDs, only bulbs marked or rated as DIMMABLE may be used.***
- For a complete list of compatible DIMMABLE LEDs please visit www.lutron.com/LEDfinder
- Some DIMMABLE LEDs require a minimum number of bulbs for proper operation. For details and a list of bulbs, please visit www.lutron.com/LEDfinder

Model Numbers

DVCLN-153P-WH	Gloss Finish, Single pole/3-way ¹ , for lights controlled from 1 or 2 locations
DVCLN-153P-WH-C	Gloss Finish, Single pole/3-way ¹ , for lights controlled from 1 or 2 locations

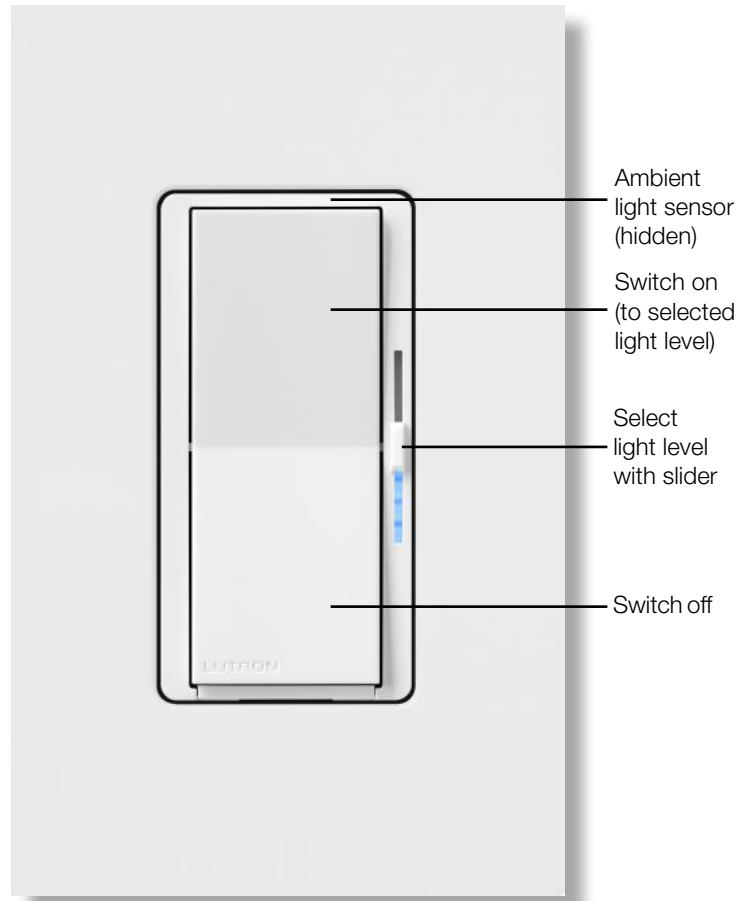

¹ If controlling a light(s) from 2 or more locations, the dimmer may be used with a Sunnata accessory switch (ST-AS(R)).

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- cULus Listed
- NOM

Power and Ratings

- 120 V~ 50/60 Hz
- 150 W dimmable LED

or

- 600 W incandescent/halogen

or

- Mixed bulb type per **Multigang and Mixed Bulb Type Ratings** table (see page 3)

or

- 250 W Lutron LTEA Hi-lume 1% forward-phase LED driver (maximum 6 drivers)

Environment

- For indoor use only.
- Operating temperatures 32 °F to 104 °F (0 °C to 40 °C).


Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Mechanical air-gap switch to disconnect load power

Limited Warranty

- www.lutron.com/warranty or call 1.844.LUTRON1 for a printed copy.

Dimensions

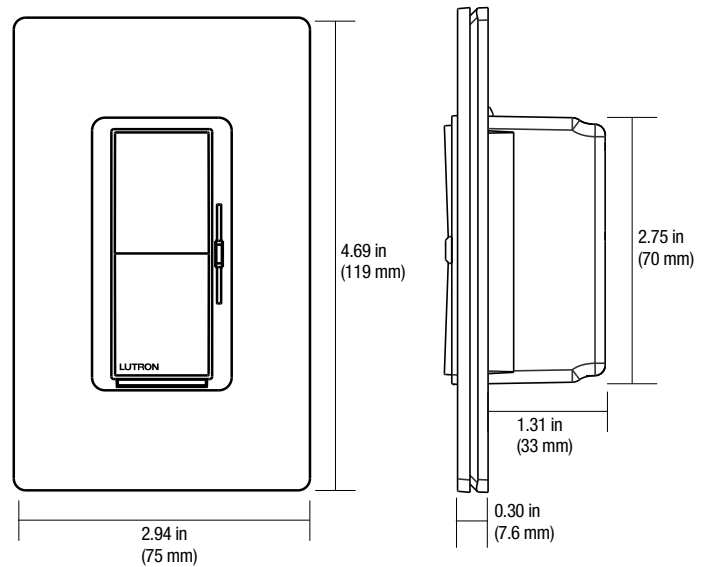

Note: Requires a U.S. wallbox 2½ in (64 mm) deep minimum.

Job Name:



Model Numbers:

Job Number:

Multigang and Mixed-Bulb-Type Ratings

Mixing bulb types **(using a combination of LED and incandescent/halogen bulbs)** will also affect the maximum ratings, as shown in the chart below.

*EXAMPLE: If one set of side sections is removed and you have three 10 W LED bulbs installed (total LED wattage = 30 W), you may add up to 300 W of incandescent or halogen lighting.

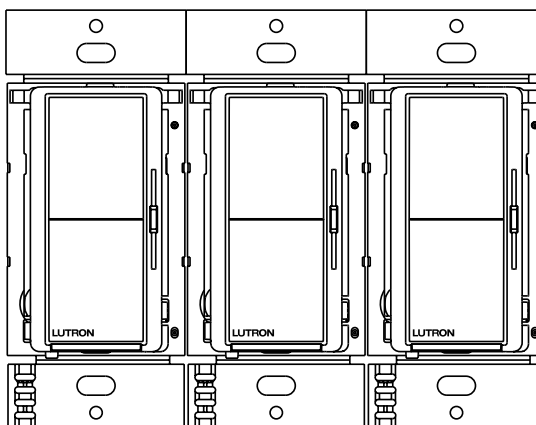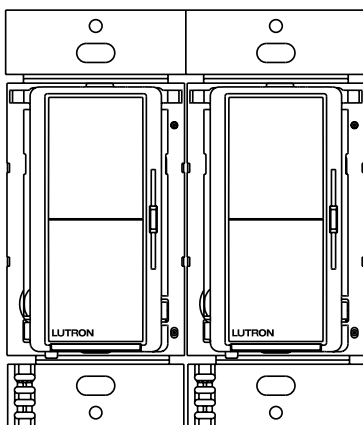


Total LED Wattage Installed (Wattage per bulb x # of bulbs)	LED	Maximum Allowable Incandescent/Halogen Wattage		
		Not ganged	End of gang	Middle of gang
0 W	+	600 W	500 W	400 W
1 W – 25 W	+	500 W	400 W	300 W
26 W – 50 W	+	400 W	300 W	200 W
51 W – 75 W	+	300 W	200 W	100 W
76 W – 100 W	+	200 W	100 W	50 W
101 W – 125 W	+	100 W	50 W	0 W
126 W – 150 W	+	0 W	0 W	0 W

Job Name:	Model Numbers:
Job Number:	

Operation

Dimmer

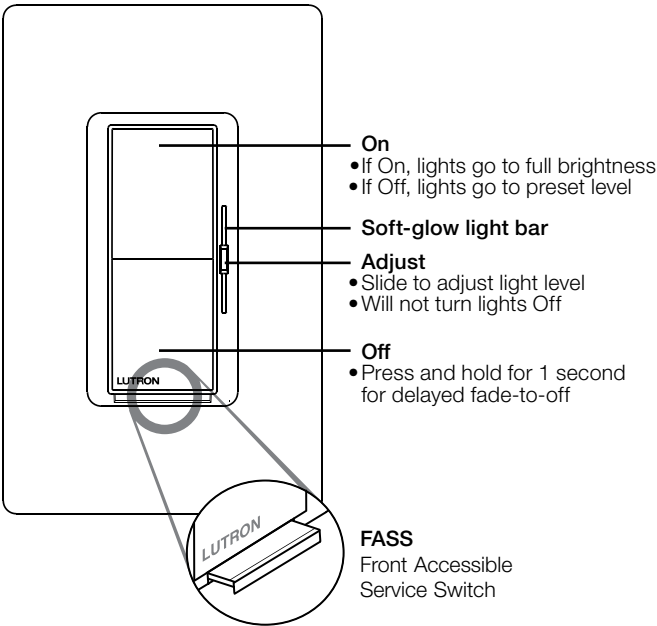


FASS — Front Accessible Service Switch

Important Notice: To service load, remove power by pulling out the FASS as far as possible. To restore power after servicing load, push the FASS back in completely.


Wiring Diagrams

Single-Pole Wiring

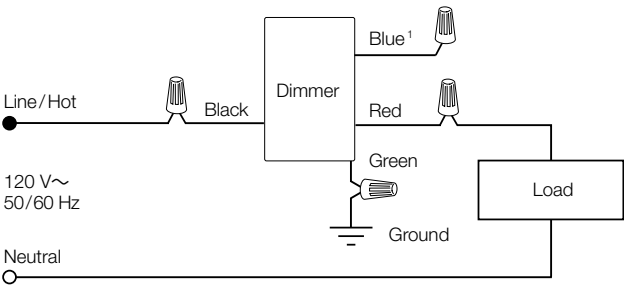


3-Way Wiring

DVCLN-153P (load-side with a mechanical switch)

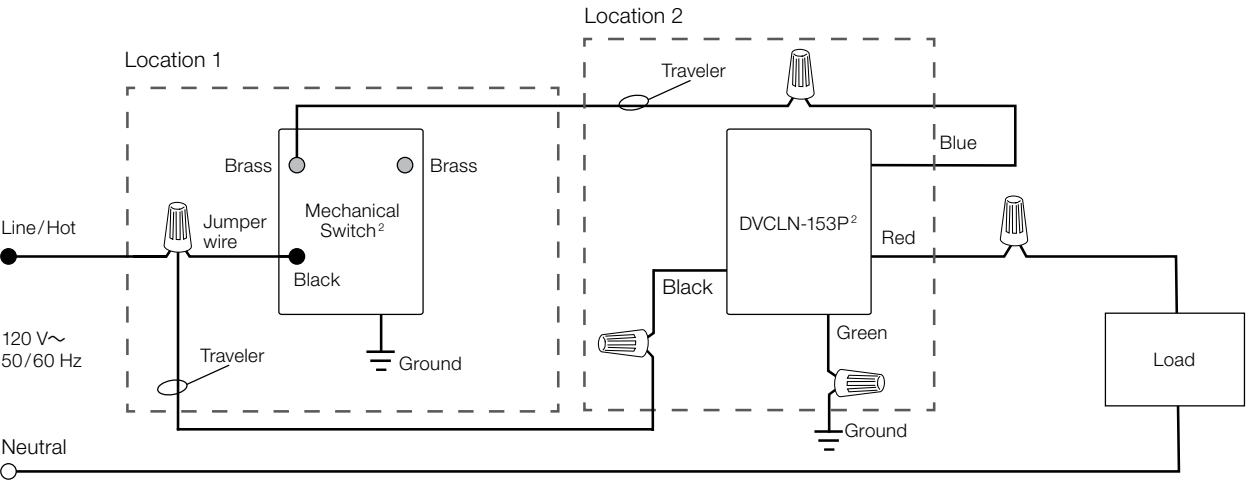

DVCLN-153P (line-side)

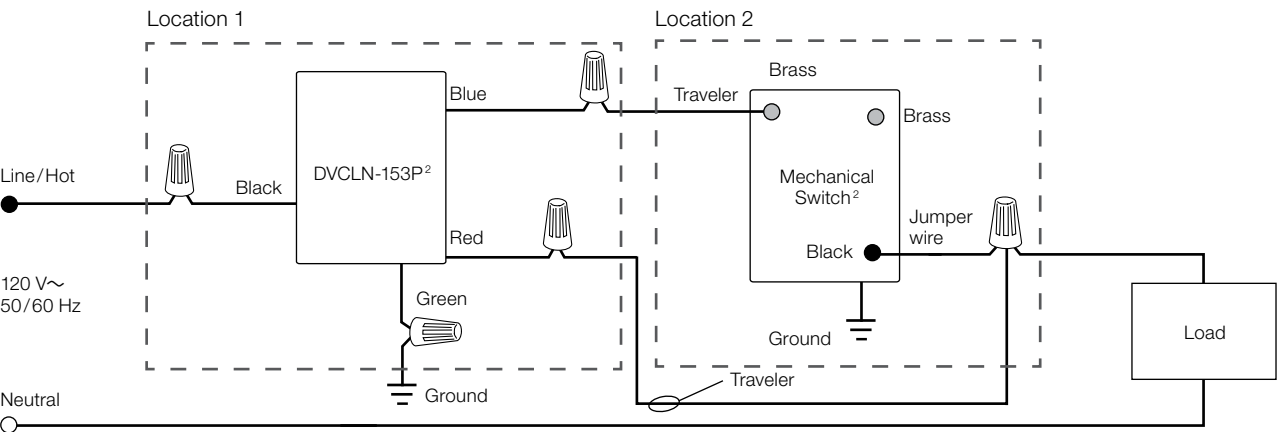


¹ When using controls without mechanical 3-way switch, cap the blue terminal. Do not connect the blue wire to any other wiring or to ground.

² Location of the DVCLN-153P and the mechanical switch may be reversed.


Wiring Diagrams (continued)

3-Way Wiring with Lutron Accessory Switch(es)


DVCLN-153P (line side)

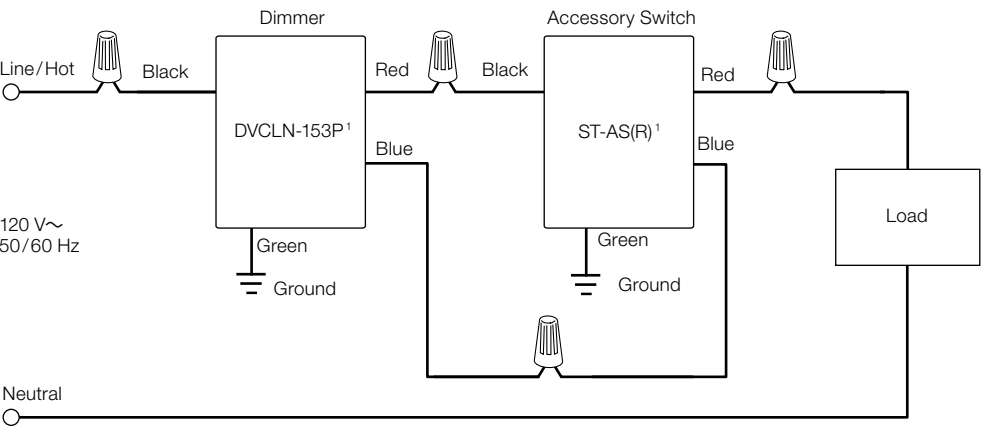

DVCLN-153P (load side)

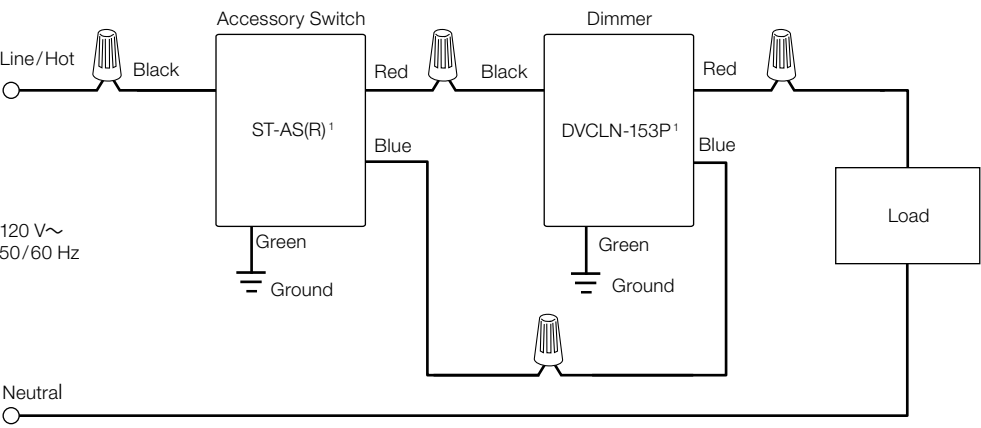

¹ Location of the DVCLN-153P and the accessory switch are reversible.

 LUTRON SPECIFICATION SUBMITTAL


Page

Job Name:	Model Numbers:
Job Number:	


Wiring Diagrams (continued)

Multi-Location Wiring with Lutron Accessory Switches


DVCLN-153P (line side)

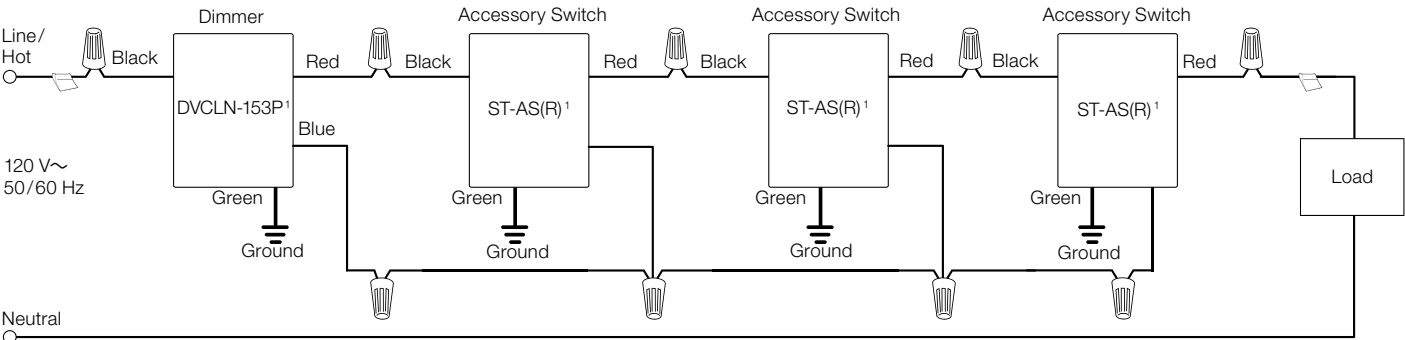

DVCLN-153P (load side)

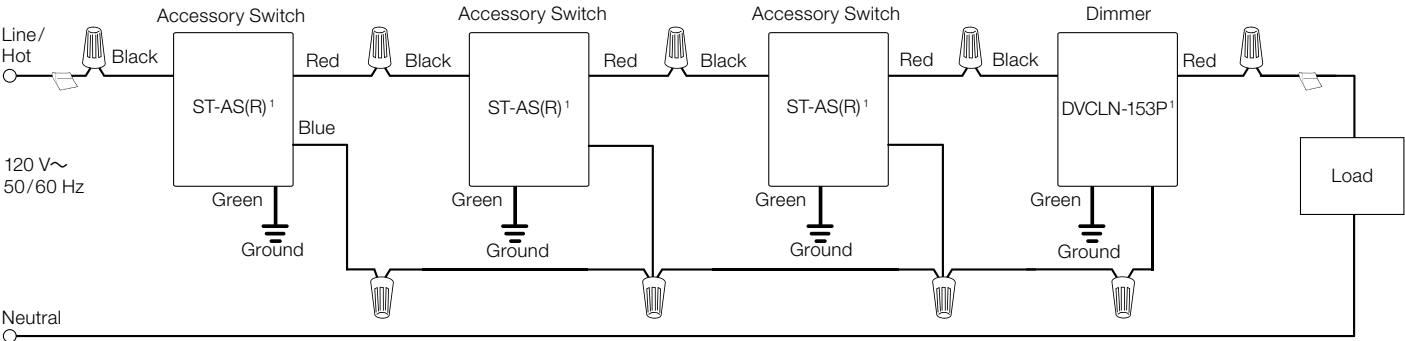

DVCLN-153P (in the middle)

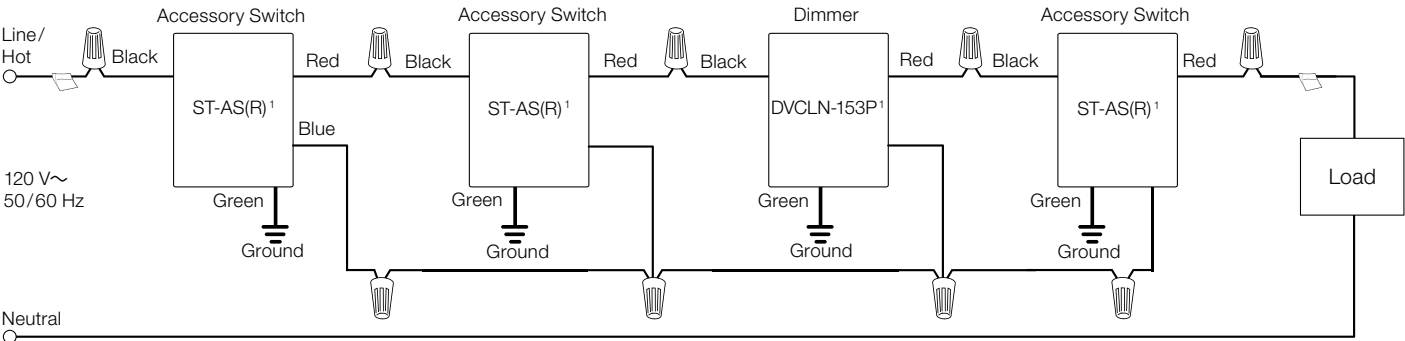

¹ The DVCLN-153P can be in any location shown.

Lutron, Claro, Diva, Hi-lume, LED+, Sunnata, and any related trade dress and logos are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

LUTRON SPECIFICATION SUBMITTAL		Page
Job Name:	Model Numbers:	
Job Number:		