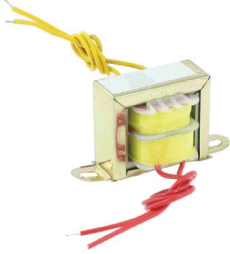



### Dimming Low-Voltage LED MR16 Lamps

Light Emitting Diodes (LEDs), also known as Solid State Lighting (SSL), are replacing traditional light sources in almost all lighting applications. Low-voltage halogen MR16 lamps are among the sources being targeted for replacement by LEDs. Because these traditional halogen MR16 lamps are simple resistors, their electrical characteristics and performance are easy to model, regardless of whether they are fed from an ELV or MLV transformer. LED MR16 lamps are constructed with built-in electronic drivers and can cause several problems with dimming (See Technical Paper, [Challenges of Dimming LED Loads on ELV and MLV Transformers](#)).

#### Dimming Solutions with MR16 Lamps

- In the table below, identify the type of transformer used in your application.
- Ensure that the dimming control model used in your application is listed below. These are the only dimming controls recommended by Lutron to work successfully with MR16 lamps listed in this document.


Transformer	Dimming Control Models <sup>1</sup>	Dimming Range <sup>2</sup>	Maximum Lamps per Transformer	Maximum Lamps per Control <sup>3</sup>
<b>MLV<sup>4</sup></b> <ul style="list-style-type: none"> <li>E-I Core</li> </ul>  <ul style="list-style-type: none"> <li>Toroidal</li> </ul> 	NTLV-600-xx-CPN0199 <sup>5</sup>	100%–20%	3	16
	VT-1000MN-x-xx <sup>5</sup>			16
	GT-250M-WH <sup>5</sup>			6
	GTJ-250M-WH <sup>5</sup>			6
	RRT-G25LW <sup>5</sup>			6
	HQRT-G25LW <sup>5</sup>			6
	GT-5NEM-WH <sup>6</sup>			6
	GTJ-5NEM-WH <sup>6</sup>			6
	RRT-G5NEW <sup>6</sup>			6
	HQRT-G5NEW <sup>6</sup>			6
	PD-5NE-xx <sup>6</sup>			6
	MA-PRO <sup>6</sup>			6
	MRF2-6ND-120-xx <sup>5</sup>			9
	PD-10NXD-xx <sup>5</sup>			16
	RRD-PRO-xx <sup>6</sup>			6
	HQRD-PRO-xx <sup>6</sup>			6
	RRD-6NA-xx <sup>6</sup>			9
	HQRD-6NA-xx <sup>6</sup>			9
	RRD-10ND-xx <sup>5</sup>			16
	HQRD-10ND-xx <sup>5</sup>			16
	PHPM-PA-120-WH			30
	PHPM-WBX-120-WH			30
	HW/LP-RPM-4U-120 <sup>5</sup>			Up to 30/channel; 30 total for module
	HW/LP-RPM-4A-120 <sup>6</sup>			Up to 19/channel; 30 total for module
	GP (Harrier) Card <sup>5</sup>			30
	ST-PRO-N <sup>6</sup>			6
	RRST-PRO-N <sup>6</sup>			6
	HRST-PRO-N <sup>6</sup>			6

<sup>1</sup> All dimming controls shown in this document require a neutral connection.  
<sup>2</sup> This is the dimming range achievable with LED MR16 bulbs. A 20% measured light level is perceived as a 45% light level by the eye. For low-light level applications (e.g., restaurants, dining rooms, bar areas), energy-efficient halogen MR16 lamps can achieve a less than 1% measured light level which is perceived as a less than 10% light level by the eye. See *Energy-Efficient Halogen MR16 Lamps* table.  
<sup>3</sup> Consider each LED as 50 W. For ganging and derating, refer to dimmer installation guide.  
<sup>4</sup> All MLV transformers should be equipped with a primary fuse to protect against overheating.  
<sup>5</sup> Toroidal transformer requires LUT-LBX-WH.  
<sup>6</sup> Needs to be configured to forward-phase mode for MLV loads.

**Note:** If your application does not use any of the above-mentioned transformers, does not have a neutral connection at the wallbox location where dimming control is to be installed, and/or if it requires a dimming range of less than 20%, using high-efficacy halogen MR16 lamps is suggested (see *Energy-Efficient Halogen MR16 Lamps* table).

Continued on next page...

## Dimming Solutions with MR16 Lamps (continued)

Transformer	Dimming Control Models <sup>1</sup>	Dimming Range <sup>2</sup>	Maximum Lamps per Transformer	Maximum Lamps per Control <sup>3</sup>
<b>ELV<sup>4</sup></b> <ul style="list-style-type: none"> <li>• Hatch RS12-60M-LED</li> <li>• Lightech LET-75</li> <li>• Lightech LET-60<sup>5</sup></li> </ul> 	CTELV-303P-xx	100% – 20%	1	6
	CTRP-253P-xx			10
	DVELV-300P-xx			6
	DVRP-253P-xx			10
	DVSCR-253P-xx			10
	GT-5NEM-WH <sup>6</sup>			10
	GTJ-5NEM-WH <sup>6</sup>			10
	HQRT-G5NEW <sup>6</sup>			10
	HW/LP-RPM-4A-120 <sup>6</sup>			Up to 24/channel; 38/module
	LQSE-4A-120-D <sup>6</sup>			Up to 4/channel; 16/module
	LQSE-4A1-D			Up to 2/channel; 8/module
	MAELV-600-xx			12
	MRF2-6ELV-120-xx			12
	NTELV-300-xx			6
	NTELV-600-xx			12
	NTRP-250-xx			12
	PD-5NE-xx <sup>6</sup>			10
	MA-PRO <sup>6</sup>			10
	RRD-PRO-xx <sup>6</sup>			10
	HQRD-PRO-xx <sup>6</sup>			10
	PHPM-PA-120-WH			38
	PHPM-WBX-120-WH			38
	RRT-G5NEW <sup>6</sup>			10
	SELV-300P-xx			6
	ST-PRO-N <sup>6</sup>			10
	RRST-PRO-N <sup>6</sup>			10
HRST-PRO-N <sup>6</sup>	10			

<sup>1</sup> All dimming controls shown in this document require a neutral connection.

<sup>2</sup> This is the dimming range achievable with LED MR16 bulbs. A 20% measured light level is perceived as a 45% light level by the eye. For low-light level applications (e.g., restaurants, dining rooms, bar areas), energy-efficient halogen MR16 lamps can achieve a less than 1% measured light level which is perceived as a less than 10% light level by the eye. See *Energy-Efficient Halogen MR16 Lamps* table.

<sup>3</sup> Consider each LED as 50 W. For ganging and derating, refer to dimmer installation guide.

<sup>4</sup> ELV transformers are recommended for reducing audible noise from fixtures in new construction.

<sup>5</sup> Lightech LET-60LW is **NOT** recommended for use with any LEDs listed in this document.

<sup>6</sup> Needs to be configured to reverse-phase mode for ELV loads.

**Note:** If your application does not use any of the above-mentioned transformers, does not have a neutral connection at the wallbox location where dimming control is to be installed, and/or if it requires a dimming range of less than 20%, using high-efficacy halogen MR16 lamps is suggested (see *Energy-Efficient Halogen MR16 Lamps* table).

Continued on next page...

## Dimming Solutions with MR16 Lamps (continued)

### 3. Select appropriate MR16 lamp.

- a. If you require a dimming range of 100%–20%, select one of the LED MR16 lamps from the following list. These LED MR16 lamps have been tested for performance and are recommended by Lutron.

#### LED MR16 Lamps

SORAA® GU5.3 Base: U.S.

Product Family	Model	Beam	Watts	Halogen Equivalent
VIVID 2700 7.5W CRI 95, R9 95	SM16-07-10D-927-03	10	7.5	50 W
	SM16-07-25D-927-03	25	7.5	50 W
	SM16-07-36D-927-03	36	7.5	50 W
VIVID 3000 7.5W CRI 95, R9 95	SM16-07-10D-930-03	10	7.5	50 W
	SM16-07-25D-930-03	25	7.5	50 W
	SM16-07-36D-930-03	36	7.5	50 W
VIVID 4000 7.5W CRI 95, R9 95	SM16-07-10D-940-03	10	7.5	50 W
	SM16-07-25D-940-03	25	7.5	50 W
	SM16-07-36D-940-03	36	7.5	50 W
VIVID 5000 7.5W CRI 95, R9 95	SM16-07-10D-950-03	10	7.5	50 W
	SM16-07-25D-950-03	25	7.5	50 W
	SM16-07-36D-950-03	36	7.5	50 W
BRILLIANT 2700K 7.5W CRI 80	SM16-07-10D-827-03	10	7.5	50 W
	SM16-07-25D-827-03	25	7.5	50 W
	SM16-07-36D-827-03	36	7.5	50 W
BRILLIANT 3000K 7.5W CRI 80	SM16-07-10D-830-03	10	7.5	50 W
	SM16-07-25D-830-03	25	7.5	50 W
	SM16-07-36D-830-03	36	7.5	50 W

**Note:** To view specific SORAA® specification sheets and lamp characteristics, visit [www.soraa.com](http://www.soraa.com)

or

- b. If you require a low-light level dimming range of less than 20%, select one of the energy-efficient halogen MR16 lamps from the following list. These are the only halogen MR16 lamps recommended by Lutron.

#### Energy-Efficient Halogen MR16 Lamps

Manufacturer	Model	Wattage		Dimming Range
		Rated	Equivalent	
GE Lighting	79586-Q30MR16HIR/CCG35	30 W	50 W	100%–1%
OSRAM	DECOSTAR 51 ECO SUPERSTAR	25 W	35 W	
		35 W	50 W	
Philips	Advantage IRC	20 W	35 W	
		30 W	50 W	
Sylvania	TRU-AIM	20 W	35 W	
		35 W	50 W	


### 4. Wire the load (see following pages for wallbox dimming control wiring diagrams).

**Note:** Refer to wiring diagrams in the product installation guides for PHPM interfaces, HW/LP-RPM modules, and GP dimming cards.

# Wallbox Dimming Control Wiring

All dimming controls shown in this document require a neutral connection.


## Digital Controls: Single-Pole Wiring

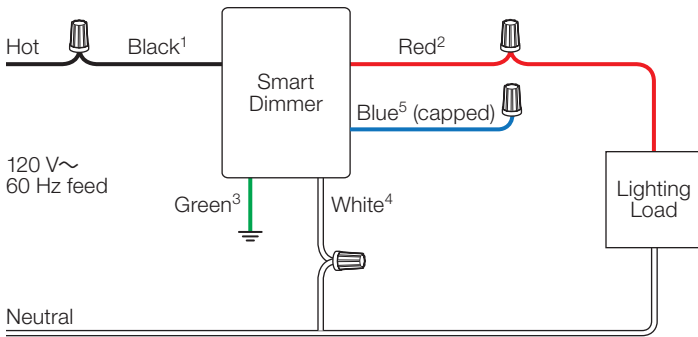

**Key**

- Ground
- Wire connector
- 1 Wire or black screw terminal\*
- 2 Wire or brass/gold screw terminal\*
- 3 Wire or green screw terminal\*
- 4 Wire or silver screw terminal\*
- 5 Wire or blue screw terminal\*
- \* Smart dimmers and companion dimmers have wires or screw terminals.

## Digital Controls: Multi-Location Wiring (Load Side)

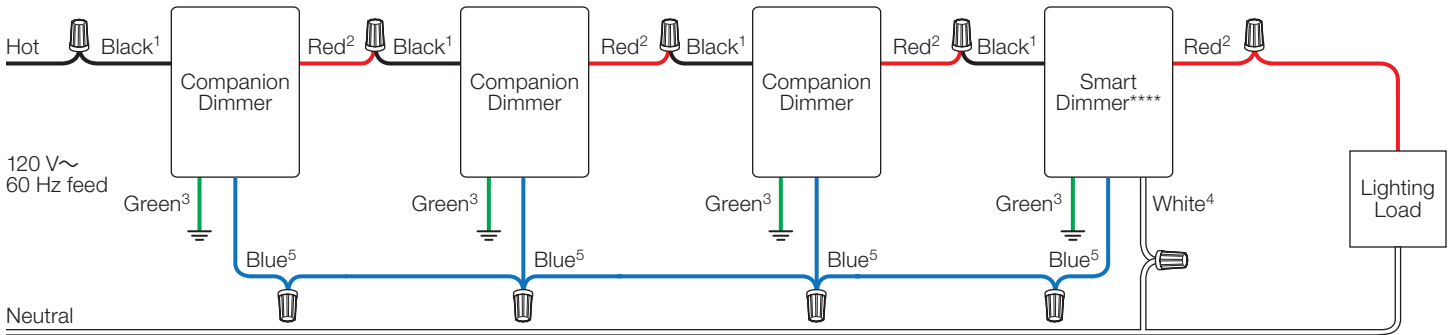


**Note:** Smart dimmer must be installed on the load side of the circuit (except for GRAFIK T controls which must be installed on the line side, and Maestro -PRO family of smart dimmers which can be installed in any position). See the following diagrams for GRAFIK T and Sunnata wiring.

\*\* Supports up to 9 total companion dimmers.

## GRAFIK T Controls: Multi-Location Wiring (Line Side)

-250M, -G25LW, -5NEM, -G5NEW models with GT-AD, RD-GRDW, or HQT-GRDW

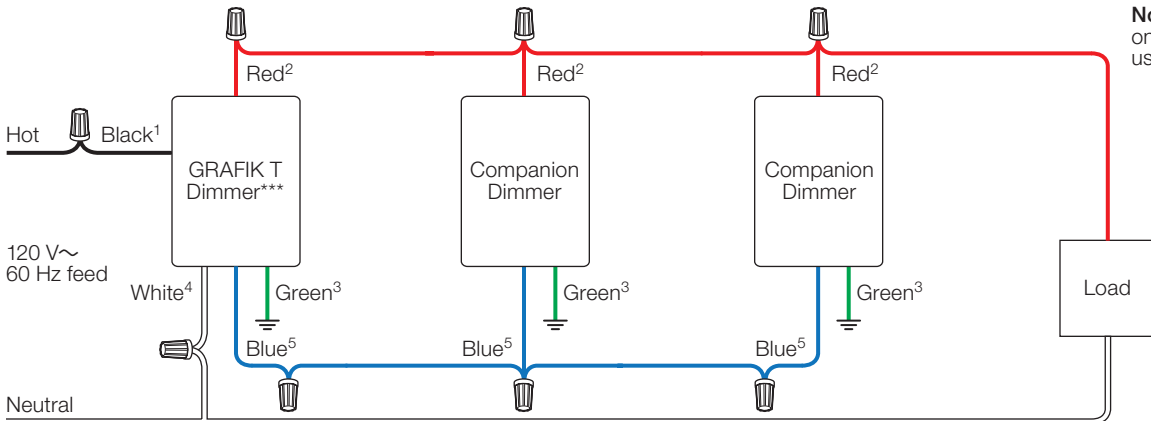

**Note:** Control must be installed on the line side of the circuit if using neutral wire.

\*\*\* Supports up to 4 total companion dimmers. Total blue traveler wire length may be up to 150 ft (45 m).

Continued on next page...



## Wallbox Dimming Control Wiring (continued)

All dimming controls shown in this document require a neutral connection.


### Sunnata PRO-N Controls: Multi-Location Wiring (Load Side)

ST-PRO-N, RRST-PRO-N, HRST-PRO-N

**Key**


-  Ground
-  Wire connector

**Note:** Sunnata PRO-N controls must be wired on the load side of the circuit.

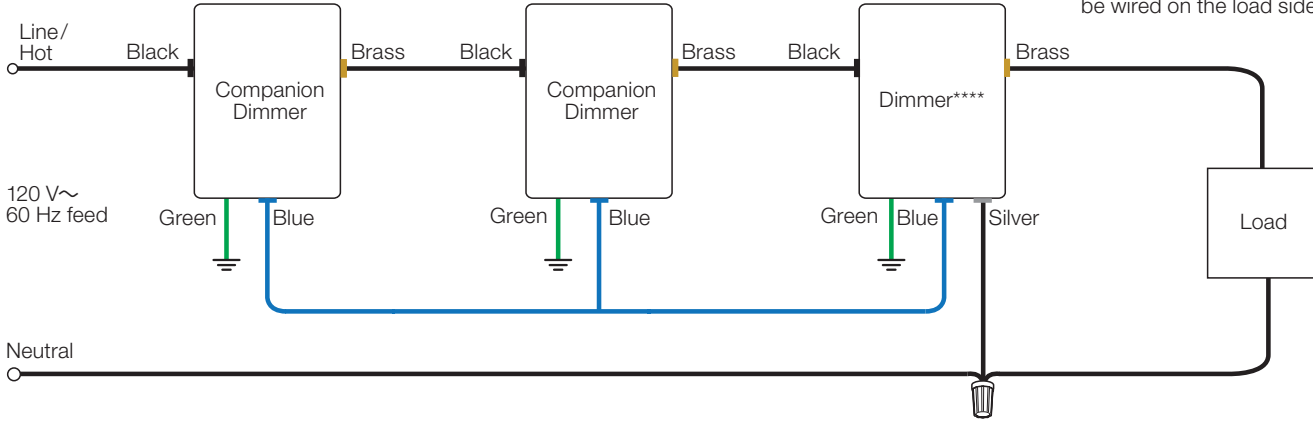


\*\*\*\* Supports up to 4 total companion dimmers. Total blue traveler wire length may be up to 150 ft (45 m).

### Analog Controls: Single-Pole Wiring

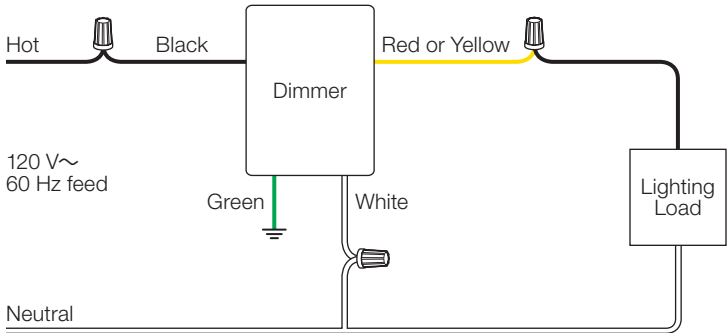

### Analog Controls: 3-Way Wiring

**Note:** Dimmer must be installed on the load side of the circuit.

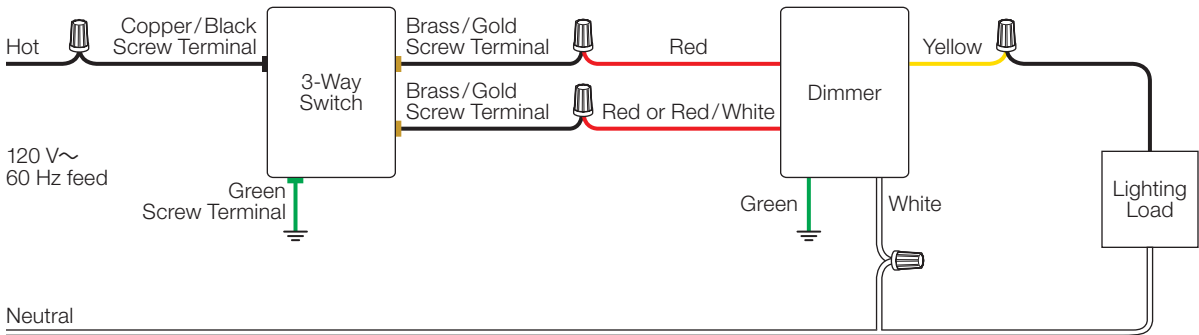

Lutron, GRAFIK T, Maestro, and Sunnata are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.

---

## Lutron Contact Numbers

### **WORLD HEADQUARTERS USA**

**Lutron Electronics Co., Inc.**  
7200 Suter Road  
Coopersburg, PA 18036-1299  
TEL: +1.610.282.3800  
FAX: +1.610.282.1243  
Customer Assistance:  
1.844.LUTRON1 (1.844.588.7661)

support@lutron.com

www.lutron.com/support

### **North & South America Customer Assistance**

**USA, Canada, Caribbean:**  
1.844.LUTRON1 (1.844.588.7661)

**Mexico:**  
+1.888.235.2910

**Central/South America:**  
+1.610.282.6701

### **UK AND EUROPE:**

**Lutron EA Limited**  
125 Finsbury Pavement  
4th floor, London EC2A 1NQ  
United Kingdom  
TEL: +44.(0)20.7702.0657  
FAX: +44.(0)20.7480.6899  
FREEPHONE (UK): 0800.282.107  
Technical Support: +44.(0)20.7680.4481

lutronlondon@lutron.com

### **ASIA:**

**Lutron GL Ltd.**  
390 Havelock Road  
#07-04 King's Centre  
Singapore 169662  
TEL: +65.6220.4666  
FAX: +65.6220.4333  
Technical Support: 800.120.4491

lutronsea@lutron.com

### **Asia Technical Hotlines**

Northern China: 10.800.712.1536  
Southern China: 10.800.120.1536  
Hong Kong: 800.901.849  
Indonesia: 001.803.011.3994  
Japan: +81.3.5575.8411  
Macau: 0800.401  
Taiwan: 00.801.137.737  
Thailand: 001.800.120.665853  
Other Countries: +65.6220.4666