


Pico® Wireless Control and Mounting Accessories (for regions other than North, Central, and South America)

The Pico® wireless control is a flexible and easy to use device that allows the user to control Lutron® wireless load control devices from anywhere in the space. This battery operated control requires no external power or communication wiring.

Features

- Provides control for the following: (dependant on model number)
 - Maestro Wireless® controls
 - PowPak™ Modules
 - Sivoia® QS wireless systems
 - Energi Savr Node™ and Quantum® systems, through the use of a QS sensor module (QSM)
 - GRAFIK Eye® QS systems
 - RadioRA® 2 systems
 - HomeWorks® QS wireless systems
 - Rania® wireless systems
 - seeTouch® Guestroom Solutions
 - Serena® Shades
- Control available in a variety of button marking options.
- Easy reconfiguration for use as:
 - Handheld remote
 - Wall mount control (with or without faceplate; faceplate adapter kit sold separately)
 - Car visor control (car visor clip sold separately)
 - A table top control (table top pedestal sold separately).
- Battery powered Pico® wireless control requires no wiring.
- 10 year battery life.
- One (1) CR2032 battery included.
- Can provide control to blinds, curtains or lighting devices within a 9 m range¹.

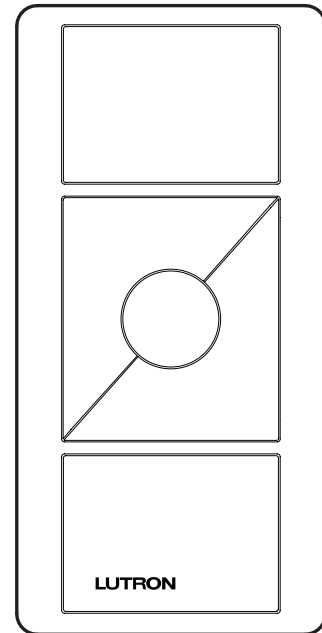

Pico® wireless control
(3BRL model shown)

¹ Model numbers starting with "PP-" have a range of 23 ft (7 m).

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- Lutron® Quality Systems registered to ISO 9001:2008.

PK

- TRA Certified
- CE Marked

PM

- SRRC Certified
- iDA Certified

PN

- WPC Certified

PP

- Certified by UL® Japan

PQ

- CE Marked
- C-Tick Marked

Power

- Operating Voltage 3 V_{DC}
- One (1) CR2032 Battery (included)

System Communication and Capacity

- Pico® wireless controls communicate using Radio Frequency (RF). See **Frequency/Channel Codes** for more information.
- Thousands of system addresses prevent interference between systems.
- Pico® wireless controls can be assigned to control blinds, curtains or lighting devices that are within a 30 ft (9 m) range¹.
- Can be configured as a scene or zone control in GRAFIK Eye® QS wireless applications.

Mounting Considerations

- Mounting of any RF devices on or in close proximity to a metal surface will drastically reduce the effective range of radio signal transmission or reception.
- All RF devices must be mounted on non-conductive materials to ensure proper performance.
- Coming soon! If you wish to mount your Pico® wireless control to a metal surface, the "Metal Mounter" will be required in order to maintain proper RF performance. Please contact Lutron® for availability at +1.610.282.3800.

Environment

- Ambient operating temperature: 32 °F to 140 °F (0 °C to 60 °C)
- Maximum 90% non-condensing relative humidity
- Indoor use only

Warranty


- 1 Year Limited Warranty
For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

¹ Model numbers starting with "PP-" have a range of 23 ft (7 m).

Job Name:	Model Numbers:
Job Number:	

Model Number

For order quantities of 96 pieces or greater of the same model number, bulk packaging may be available. Mounting hardware is not available with bulk packaging. Please contact Lutron® for availability at +1.610.282.3800.

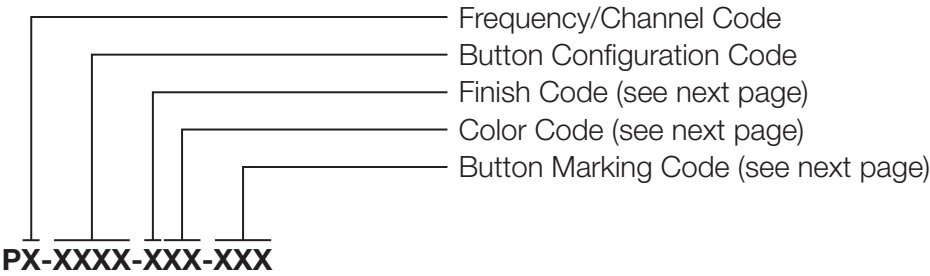


Frequency/Channel Codes:

- Code
- K: 868.0 – 869.8 MHz (Europe, U.A.E.)
 - M: 868.0 – 868.5 MHz Limited (China, Singapore)
 - N: 865.5 – 866.5 MHz (India)
 - P: 312.0 – 315.0 MHz (Japan)
 - Q: 433.0 – 434.7 MHz Limited (Hong Kong, Macau)


Contact Lutron® Customer Service at www.lutron.com for frequency/channel code compatibility with your particular geographic region, and for integrating with other Lutron® lighting and shading products.

Button Configuration Codes:


Button Configuration	Code
2 Button	2B
2 Button with Raise/Lower	2BRL
3 Button	3B
3 Button with Raise/Lower	3BRL




2 Button
(2B)



2 Button with
Raise/Lower
(2BRL)



3 Button
(3B)




3 Button with
Raise/Lower
(3BRL)

Continued on next page...

Job Name:	Model Numbers:
Job Number:	

Model Number (continued)

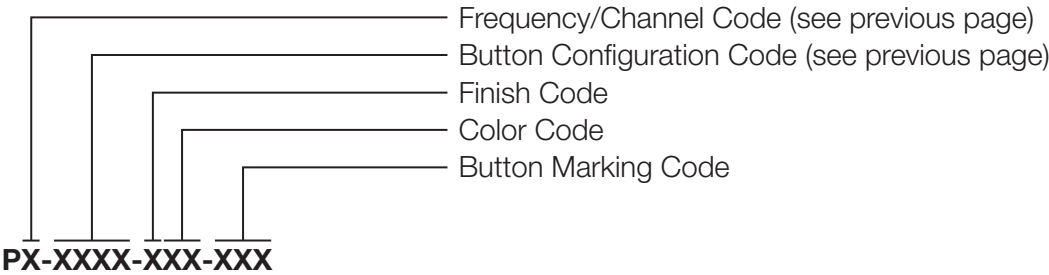

Finish Codes:

Finish	Code
Gloss	G
Matte	M


Color Codes:

Gloss Color	Code	Matte Color	Code
White	WH	White	AW
Black	BL	Black	BL
Ivory	IV		
Light Almond	LA		
White/Gray	WG ¹		

¹ Top and Raise buttons are White; Preset, Lower, and Bottom buttons are Gray.

Button Marking Codes:


2 Button



Light
(L01)

Screen
(S08)

2 Button with Raise/Lower




Light
(L01)

Continued on next page...


Button Marking Codes: (continued)

3 Button




Light
(L01)


3 Button with Raise/Lower




Light
(L01)




Shade (icons)
(S01)




Shade (text)
(S02)




Blackout
(S03)




Sheer
(S04)




Blind
(S05)



Skylight
(S06)



Drapery
(S07)



Horizontal Sheer Blind
(S09)


Job Name:	Model Numbers:
Job Number:	

Operation

Preset Button
(3B & 3BRL models only)

Tap once:
Devices go to preset levels/positions. Activates scene 16 when used in scene mode with GRAFIK Eye® QS wireless applications.

Press and hold:
To save new preset level or position, press and hold for 6 seconds.

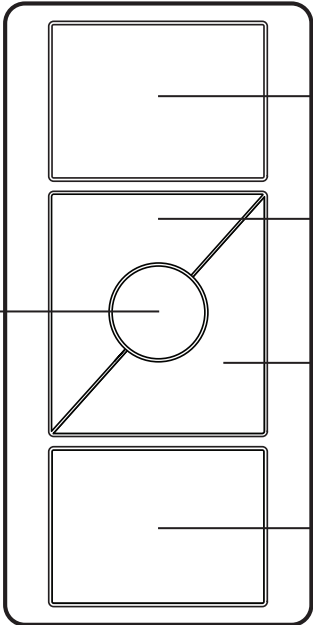

(3BRL model shown)

Top Button
Lights brighten to full intensity and shades/ draperies go to open limit. Activates scene 1 when used in scene mode with GRAFIK Eye® QS wireless applications.


Raise Button (2BRL & 3BRL models only)
Lights increase in intensity and shades/ draperies move towards open limit.

Lower Button (2BRL & 3BRL models only)
Lights decrease in intensity and shades/ draperies move towards close limit.

Bottom Button
Lights dim to off and shades/draperies go to close limit. Activates “OFF” scene when used in scene mode with GRAFIK Eye® QS wireless applications.

Dimensions


Measurements shown as: in (mm)

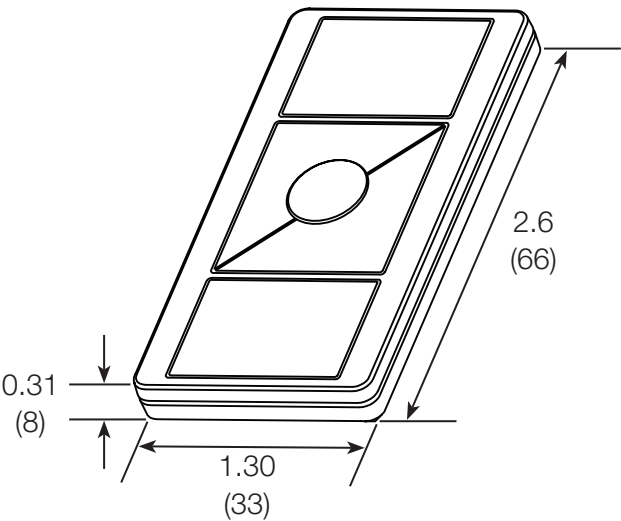

Pico® Pedestal Model Number

Pedestals sold separately. Available in gloss finish only.

L-PEDX-XX




Capacity	Capacity Code	Gloss Color	Color Code
Single	1	White	WH
Double	2	Black	BL
Triple	3		
Quadruple	4		

Dimensions

Measurements shown as: in (mm)


Single Pedestal

Pedestals sold separately.

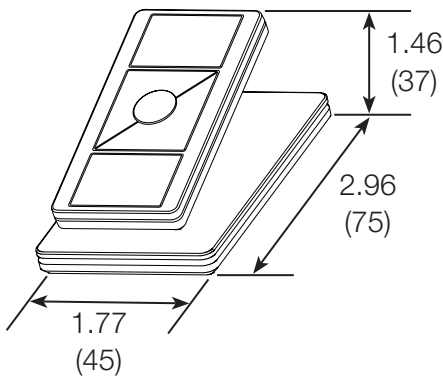


Double Pedestal

Pedestals sold separately.

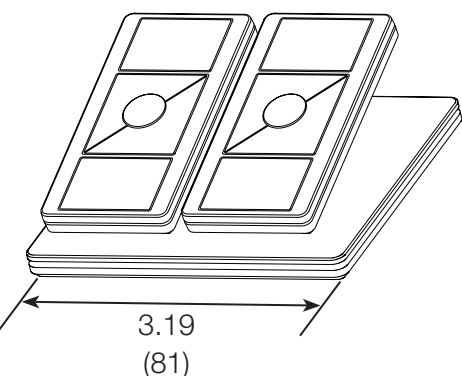


Triple Pedestal

Pedestals sold separately.

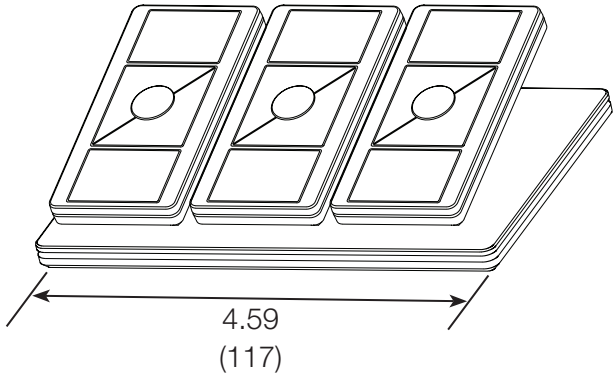

Quadruple Pedestal

Pedestals sold separately.

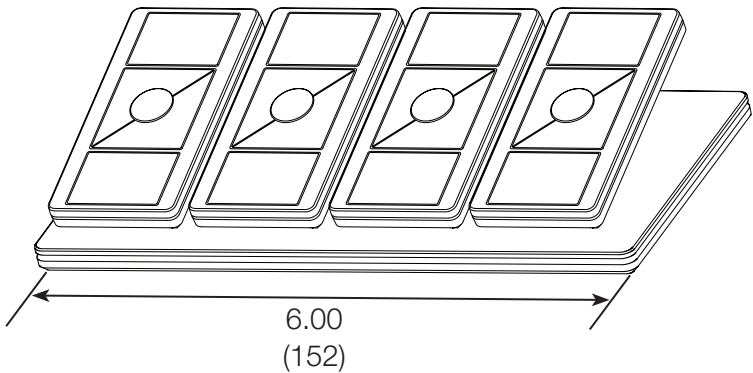


Job Name:	Model Numbers:
Job Number:	

Mounting Options

Stand Alone Mounting


Adhesive Mount (included with Pico®)

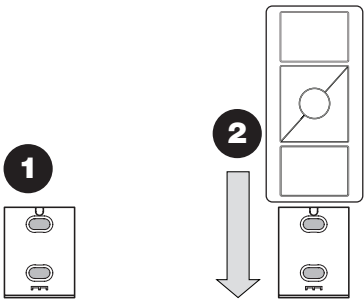

Screw Mount (sold separately)



Model PICO-SM-KIT

Note: Kit includes special screws to be used for more permanent mounting and/or for non-smooth surfaces.

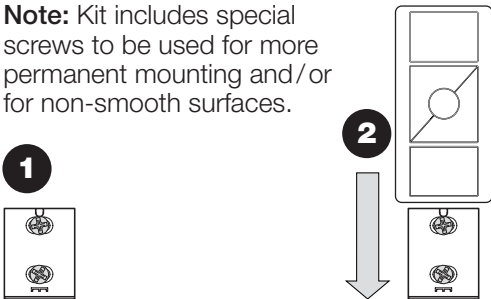

Faceplate Adapter

Model PICO-FP-ADAPT (sold separately)

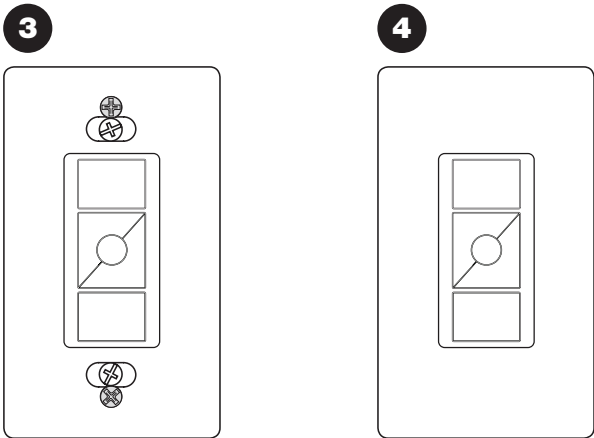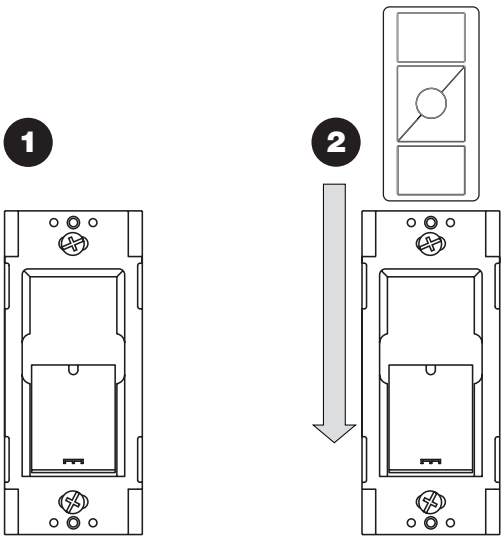


*Wallplate adapter / wallplate sold separately

Continued on next page...


Job Name:	Model Numbers:
Job Number:	

Mounting Options (continued)

Car Visor
Model PICO-CARVISOR-CL (sold separately)

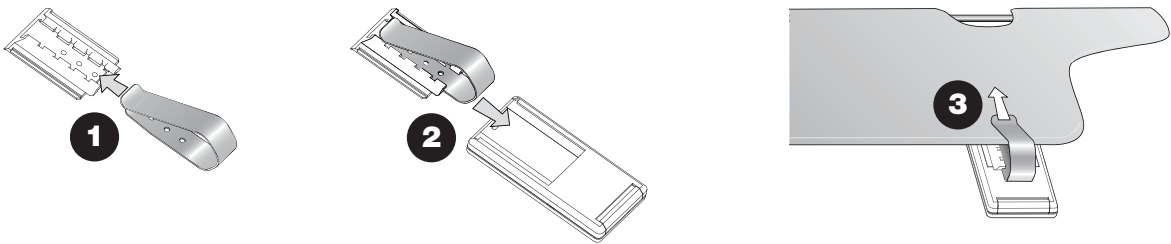

Mounting to Metal Surfaces
Coming Soon (sold separately)

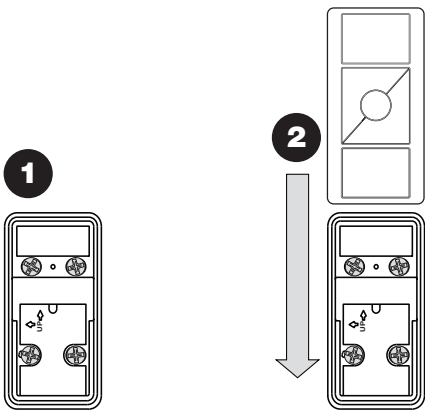

International surface-mounting faceplate kit
Coming Soon (sold separately)

