

seeTouch Wallstation

Wallstations Features

- Provide additional control points throughout a space
- Up to 16 Wallstations and Control Interfaces can be added for a total of 24 control points in one system
- seeTouch™ Wallstations offer:
 - Large, rounded buttons are easy to use
 - User-changeable button and faceplate assemblies which make for easy customization
 - On-button engraving is angled up to the eye for easy reading
 - Backlit buttons for improved clarity in low light conditions



seeTouch
pg.43



Architectural
pg.46



European-Style
pg.49



Slim Button
pg.52




Large Button
pg.53



Architrave™
pg.54

GRAFIK Eye 3000 SYSTEM MAP (SHOWN)

- Use the map at right to identify system component being reviewed in each section
- For overall wiring information, See pgs. 24 and 34

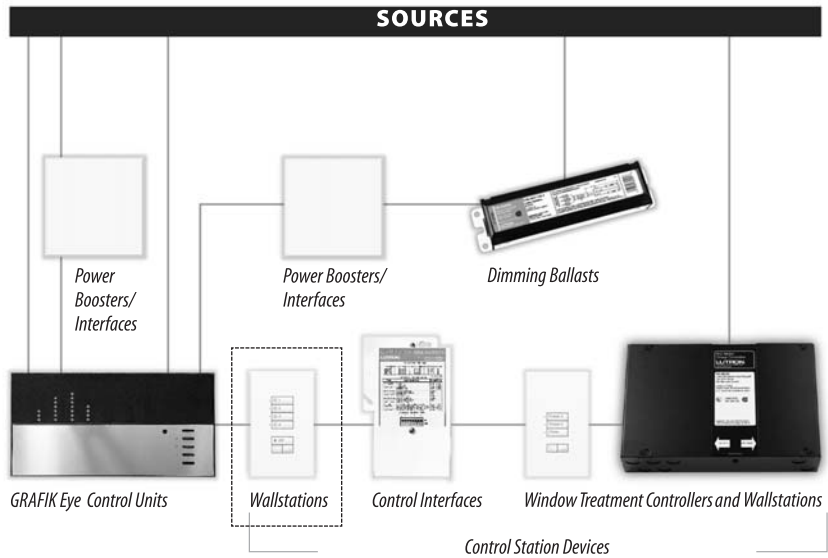

Standards listed below apply to one or more products in the **GRAFIK Eye** product line. Consult factory for specific information.



SPECIFICATIONS


- Wallstation and Control Interface maximums:
 - Per System: 16 (Class 2/PELV) (includes Window Treatment Wallstations)
 - Three from each **GRAFIK Eye 3000** Control Unit without external power supply; for Lutron Power Supply, GRX-12VDC, see pg. 64. (Does not apply to **GRAFIK Eye 4000**)
- Wiring Specification & Maximums per System:
 - **GRAFIK Eye 3000**: (2) twisted pair #18 AWG (1.0mm²)
 - **GRAFIK Eye 4000**: (2) #12 AWG, (2.5mm²) and (1) twisted, shielded pair #18 AWG (1.0mm²) plus (1) #18 AWG (1.0mm²)
 - Distance: 2,000' (610m); for other cable distances, see **GRAFIK Eye** Application Notes available at www.lutron.com
 - Installation: Daisy chain (no home-run wiring)
 - Cable available from Lutron, see pg. 64
- Power: 12VDC (From **GRAFIK Eye 3000** Series Control Unit or GRX-12VDC); 24VAC (From Power Panels for **GRAFIK Eye 4000** Series)
- Configuration: Integral DIP switches determine function and can be configured in the field
- Mounting: Standard US wallbox unless otherwise noted; no derating required when multiganged

SEETOUCH™



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹
Wallbox Size:
single-gang



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹
Wallbox Size:
single-gang



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹
Wallbox Size:
single-gang

Product

2-BUTTON WALLSTATION

Model

SG-2BN^{-2,3,4}

Color

Suffix

Ordering Example

SG-2BN-WH-EGN

add color/finish and engraving suffix to model #.

For choices see:

www.lutron.com/seeTouch

Matte Finishes

Ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Gloss (NEMA) Finishes

Ships in 48 hrs.

(Insert models only)

White	GWH
Light Almond	GLA

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ
Anodized Aluminum	
Clear	CLA
Black	BLA
Brass	BRA

Satin Finishes

Ships in 48 hrs.

• See pg. 10 for complete color offering and suffixes.

Customization

Ships in 4-6 weeks.

• See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.

• See pg. 143 for engraving schedules.

Locking Covers

• See pg. 64 for more information.

4-BUTTON WALLSTATION

SG-4BN^{-2,3,4}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16)
- Can be mounted with other wallstations in multigang faceplate for 8/12/16 scene option
- No off or fine-tuning of light levels
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

4-SCENE WALLSTATION WITH OFF

SG-4NRLN^{-2,3,4}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

Footnotes, pg. 43

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.31" (8mm).
- 2 Insert version available for Multigang installations. For insert version use I in place of last N in model number. See pg. 136 for more information.
- 3 Class 2/PELV control wiring.
- 4 Counts as one of 16 maximum Control Station Devices.

SEETOUCH™



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹

Wallbox Size:
single-gang



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹

Wallbox Size:
single-gang

Product

4-SCENE WALLSTATION WITH OFF AND RAISE/LOWER

Model

SG-4SN^{-2,3,4}

Color

Suffix

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off
- Fine-tuning of light levels with master raise/lower buttons
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

Ordering Example

SG-4SN-WH-EGN
add color/finish suffix to model #

For choices see:
www.lutron.com/seeTouch

Matte Finishes

Ships in 48 hrs.
White WH
Ivory IV
Beige BE
Gray GR
Brown BR
Black BL

Gloss (NEMA) Finishes

Ships in 48 hrs. (Insert models only)
White GWH
Light Almond GLA

Metal Finishes

Ships in 4-6 weeks.
Bright Brass BB
Bright Chrome BC
Bright Nickel BN
Satin Brass SB
Satin Chrome SC
Satin Nickel SN
Antique Brass QB
Antique Bronze QZ
Anodized Aluminum
Clear CLA
Black BLA
Brass BRA

Satin Finishes

Ships in 48 hrs.
• See pg. 10 for complete color offering and suffixes.

Customization

Ships in 4-6 weeks.
• See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
• See pg. 143 for engraving schedules.

Locking Covers

• See pg. 64 for more information.

4-SCENE WALLSTATION WITH OFF, RAISE/LOWER AND INFRARED RECEIVER

SG-4SIRN^{-2,3,4}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12 or 13-16) plus off from keypad or four-scene Wireless Remote Control (GRX-IT-WH, ordered separately)
- Recalls eight scenes (1-8, 5-12, 9-16 or 13-16/1-4) plus off from eight-scene Wireless Remote Control (GRX-8IT-WH, ordered separately)
- Fine-tuning of light levels from Keypad or Wireless Remote Control
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

Footnotes, pg. 44

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.31" (8mm).
- 2 Insert version available for multigang installations. For insert version use I in place of last N in model number. See pg. 136 for more information.
- 3 Class 2/PELV control wiring.
- 4 Counts as one of 16 maximum Control Station Devices.

SEETOUGH™



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹
Wallbox Size:
single-gang

4-SCENE WALLSTATION WITH OFF, RAISE/LOWER AND INFRARED RECEIVER PROGRAMMING SG-PRON-^{2,3,4}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12 or 13-16) plus off from keypad or four-scene Wireless Remote Control (GRX-IT-WH, ordered separately)
- Recalls eight scenes (1-8, 5-12, 9-16 or 13-16/1-4) plus off from eight-scene Wireless Remote Control (GRX-8IT-WH, ordered separately)
- Enhanced Infrared commands for scene programming, preset selection and individual zone control of each GRAFIK Eye
- Fine-tuning of light levels from Keypad or Wireless Remote Control
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

Ordering Example

SG-PRON-WH
add color/finish suffix to model #
For choices see:
www.lutron.com/seeTouch

Matte Finishes

Ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Gloss (NEMA) Finishes

Ships in 48 hrs. (Insert models only)

White	GWH
Light Almond	GLA

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ
Anodized Aluminum	
Clear	CLA
Black	BLA
Brass	BRA

Satin Finishes

Ships in 48 hrs.
• See pg. 10 for complete color offering and suffixes.

Customization

Ships in 4-6 weeks.
• See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.

• See pg. 143 for engraving schedules.

Locking Covers

• See pg. 64 for more information.



Dimensions


W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹
Wallbox Size:
single-gang

4-PARTITION STATUS WALLSTATION SG-4PSN-^{2,3,4}

- Provides four buttons to determine which GRAFIK Eye Control Unit(s) operate independently or in combination to reflect partition status for up to four moveable walls (five rooms)
- Last button resets all Control Units to independent operation
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

For Example:

This button...	Toggles the status of...	To combine Control Units:
Button 1	Wall A	1 and 2
Button 2	Wall B	2 and 3
Button 3	Wall C	3 and 4
Button 4	Wall D	4 and 5

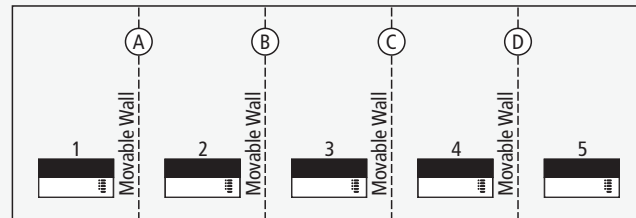

Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.06" (27mm)¹
Wallbox Size:
single-gang

4-BUTTON MASTER CONTROL WALLSTATION SG-4MN-^{2,3,4}

- Each of four buttons toggles selected GRAFIK Eye Control Unit(s) between Scene 1 and off
- Last button can be all on (Scene 1) -or- all off for selected GRAFIK Eye Control Unit(s)
- General Engraving option (EGN) shown
- For seeTouch Model Guide, see pg. 136

Footnotes, pg. 45

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.31" (8mm).
- 2 Insert version available for multigang installations. For insert version use I in place of last N in model number. See pg. 136 for more information.
- 3 Class 2/PELV control wiring.
- 4 Counts as one of 16 maximum Control Station Devices.

ARCHITECTURAL



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.69" (43mm)¹

Wallbox Size: single-gang



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 2.00" (51mm)¹

Wallbox Size: single-gang

Product

**2-BUTTON WALLSTATION
WITH STATUS LIGHT**

Model

NTGRX-2B-SL-^{2,3}

- Optional Functions (can be selected in the field):
 - Turns lighting on (Scene 1) and off
 - Recalls preset light levels for two scenes (9/10 or 13/14)
 - Single partition status determines which **GRAFIK Eye** Control Unit(s) operate independently or in combination to reflect status for one moveable wall (two rooms)
 - Panic (Scene 16, lock out **GRAFIK Eye** Manual Control)
 - Sequencing (Selects Scenes 5-16 sequentially)
 - Individual Zone Raise/Lower

KEYSWITCH

NTGRX-KS-^{2,3}

- Provides momentary keyswitch control for all functions of the NTGRX-2B-SL- (see above)

Footnotes, pg. 46

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.35" (9mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

Color

Suffix

Ordering Example

NTGRX-2B-SL-*WH*
add color/finish suffix
to model #

Matte Finishes

Standard, ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ
Anodized Aluminum	
Clear	CLA
Black	BLA
Brass	BRA

Customization

Ships in 4-6 weeks.

- See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
- See pg. 143 for engraving schedules.

Locking Covers

- See pg. 64 for more information.

ARCHITECTURAL



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.13" (29mm)¹
Wallbox Size: single-gang



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.13" (29mm)¹
Wallbox Size: single-gang



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.13" (29mm)¹
Wallbox Size: single-gang

Product	Model	Color	Suffix
<p>4-BUTTON WALLSTATION</p> <ul style="list-style-type: none"> Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) Can be mounted with other wallstations in multigang faceplate for 8/12/16 scene selection No off or fine-tuning of light levels 	NTGRX-4B-2,3		
<p>4-SCENE WALLSTATION WITH OFF AND RAISE/LOWER</p> <ul style="list-style-type: none"> Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off Fine-tuning of light levels with master raise/lower button 	NTGRX-4S-2,3		
<p>4-SCENE WALLSTATION WITH OFF AND INFRARED RECEIVER</p> <ul style="list-style-type: none"> Recalls preset light levels for four scenes (1-4, 5-8, 9-12 or 13-16) plus off from keypad or four-scene Wireless Remote Control (GRX-IT-WH, ordered separately) Recalls eight scenes (1-8, 5-12, 9-16 or 13-16/1-4) plus off from eight-scene Wireless Remote Control (GRX-8IT-WH, ordered separately) Fine-tuning of light levels from Wireless Remote Control 	NTGRX-4S-IR-2,3		
<p>Footnotes, pg. 47</p> <ol style="list-style-type: none"> Depth includes wallplate and backbox. Wallplate depth is 0.35" (9mm). Class 2/PELV control wiring. Counts as one of 16 maximum Control Station Devices. 			

Ordering Example

NTGRX-4B-WH
add color/finish suffix to model #

Matte Finishes

Standard, ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ

Anodized Aluminum

Clear	CLA
Black	BLA
Brass	BRA

Customization

Ships in 4-6 weeks.

- See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
- See pg. 143 for engraving schedules.

Locking Covers

- See pg. 64 for more information.

ARCHITECTURAL



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.13" (29mm)¹

Wallbox Size: single-gang

Product

**4-SCENE WALLSTATION WITH OFF,
INFRARED RECEIVER AND SWITCH INPUT**

Model

NTGRX-SI4S-IR-^{2,3}

Color

Suffix

Ordering Example

NTGRX-SI4S-IR-WH
add color/finish suffix
to model #

Matte Finishes

Standard, ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ
Anodized Aluminum	
Clear	CLA
Black	BLA
Brass	BRA

Customization

Ships in 4-6 weeks.

- See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
- See pg. 143 for engraving schedules.

Locking Covers

- See pg. 64 for more information.



Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.13" (29mm)¹

Wallbox Size: single-gang


4-PARTITION STATUS WALLSTATION

NTGRX-4PS-^{2,3}

- Provides four buttons to determine which GRAFIK Eye Control Unit(s) operate independently or in combination to reflect partition status for up to four moveable walls (five rooms)
- Last button resets all Control Units to independent operation

For Example:

This button...	Toggles the status of...	To combine Control Units:
Button 1	Wall A	1 and 2
Button 2	Wall B	2 and 3
Button 3	Wall C	3 and 4
Button 4	Wall D	4 and 5

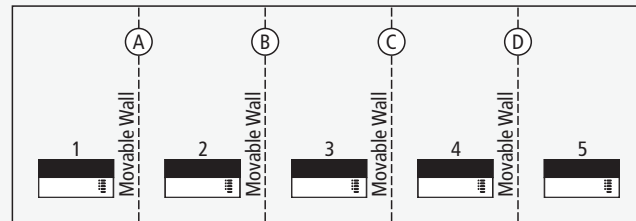

Dimensions

W: 2.75" (70mm)
H: 4.56" (116mm)
D: 1.13" (29mm)¹

Wallbox Size: single-gang

**4-BUTTON MASTER CONTROL
WALLSTATION**

NTGRX-4M-^{2,3}

- Each of four buttons toggles selected GRAFIK Eye Control Unit(s) between Scene 1 and off
- Last button can be all on (Scene 1) -or- all off for selected GRAFIK Eye Control Unit(s)

Footnotes, pg. 48

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.35" (9mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

EUROPEAN-STYLE



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹


Wallbox Size:
UK/German, single-gang



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang

Product

Model

Color

Suffix

2-BUTTON WALLSTATION

EGRX-2B-SL-^{2,3}

- Optional Functions (can be selected in the field):
 - Turns lighting on (Scene 1) and off
 - Recalls preset light levels for two scenes (9/10 or 13/14)
 - Single partition status determines which GRAFIK Eye Control Unit(s) operate independently or in combination to reflect status for one moveable wall (two rooms)
 - Panic (Scene 16, lock out GRAFIK Eye Manual Control)
 - Sequencing (Selects Scenes 5-16 sequentially)
 - Individual Zone Raise/Lower
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

Ordering Example

EGRX-2B-SL-WH
add color/finish suffix to model #

Matte Finishes

Standard, ships in 48 hrs.
White WH
Black BL

Metal Finishes

Ships in 4-6 weeks.
Bright Brass BB
Bright Chrome BC
Bright Nickel BN
Satin Brass SB
Satin Chrome SC
Satin Nickel SN
Antique Brass QB
Antique Bronze QZ
Anodized Aluminum
Clear CLA
Black BLA
Brass BRA

4-BUTTON WALLSTATION

EGRX-4B-^{2,3}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16)
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

Customization

Ships in 4-6 weeks.
• See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
• See pg. 143 for engraving schedules.

Locking Covers

• See pg. 64 for more information.

4-SCENE WALLSTATION WITH OFF AND RAISE/LOWER


EGRX-4S-^{2,3}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off
- Fine-tuning of light levels with master raise/lower buttons
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

Footnotes, pg. 49

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.48" (12mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

EUROPEAN-STYLE



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang

Product

8-SCENE WALLSTATION WITH OFF AND RAISE/LOWER

Model

EGRX-8S-^{2,3}

- Recalls preset light levels for eight scenes (1-8, 5-12, 9-16, or 13-16/1-4) plus off
- Fine-tuning of light levels with master raise/lower buttons
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

4-SCENE WALLSTATION WITH OFF, RAISE/LOWER AND INFRARED RECEIVER

EGRX-4S-IR-^{2,3}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12 or 13-16) plus off from keypad or four-scene Wireless Remote Control (GRX-IT-WH, ordered separately)
- Recalls eight scenes (1-8, 5-12, 9-16 or 13-16/1-4) plus off from eight-scene Wireless Remote Control (GRX-8IT-WH, ordered separately)
- Fine-tuning of light levels from keypad or Wireless Remote Control
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

8-SCENE WALLSTATION WITH OFF, RAISE/LOWER AND INFRARED RECEIVER

EGRX-8S-IR-^{2,3}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off from four-scene Wireless Remote Control (GRX-IT-WH, ordered separately)
- Recalls eight scenes (1-8, 5-12, 9-16 or 13-16/1-4) plus off from keypad or eight-scene Wireless Remote Control (GRX-8IT-WH, ordered separately)
- Fine-tuning of light levels from keypad or Wireless Remote Control
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

Footnotes, pg. 50

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.48" (12mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

Color

Suffix

Ordering Example

EGRX-8S-WH
add color/finish suffix to model #

Matte Finishes

Standard, ships in 48 hrs.

White WH
Black BL

Metal Finishes

Ships in 4-6 weeks.

Bright Brass BB
Bright Chrome BC
Bright Nickel BN
Satin Brass SB
Satin Chrome SC
Satin Nickel SN
Antique Brass QB
Antique Bronze QZ

Anodized Aluminum

Clear CLA
Black BLA
Brass BRA

Customization

Ships in 4-6 weeks.
• See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.

• See pg. 143 for engraving schedules.

Locking Covers

• See pg. 64 for more information.

EUROPEAN-STYLE



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang



Dimensions

W: 3.38" (86mm)
H: 3.38" (86mm)
D: 0.88" (22mm)¹

Wallbox Size:
UK/German, single-gang

Product

4-SCENE WITH OFF, RAISE/LOWER AND INFRARED RECEIVER PROGRAMMING

Model

EGRX-PRO-^{2,3}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12 or 13-16) plus off from keypad or four-scene Wireless Remote Control (GRX-IT-WH, ordered separately)
- Recalls eight scenes (1-8, 5-12, 9-16 or 13-16/1-4) plus off from eight-scene Wireless Remote Control (GRX-8IT-WH, ordered separately)
- Fine-tuning of light levels from keypad or Wireless Remote Control
- Mounts in UK/German wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available
- Enhanced infrared commands for scene programming, preset selection and individual zone control of each **GRAFIK Eye**

Color

Suffix

Ordering Example

EGRX-PRO-WH
add color/finish suffix to model #

Matte Finishes

Standard, ships in 48 hrs.
White WH
Black BL

Metal Finishes

Ships in 4-6 weeks.
Bright Brass BB
Bright Chrome BC
Bright Nickel BN
Satin Brass SB
Satin Chrome SC
Satin Nickel SN
Antique Brass QB
Antique Bronze QZ
Anodized Aluminum
Clear CLA
Black BLA
Brass BRA

Customization

Ships in 4-6 weeks.
• See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
• See pg. 143 for engraving schedules.

Locking Covers

• See pg. 64 for more information.


4-PARTITION STATUS WALLSTATION

EGRX-4PS-^{2,3}

- Provides four buttons to determine which **GRAFIK Eye** Control Unit(s) operate independently or in combination to reflect partition status for up to four moveable walls (five rooms)
- Last button resets all Control Units to independent operation
- Mounts in UK/German Wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

For Example:

This button...	Toggles the status of...	To combine Control Units:
Button 1	Wall A	1 and 2
Button 2	Wall B	2 and 3
Button 3	Wall C	3 and 4
Button 4	Wall D	4 and 5

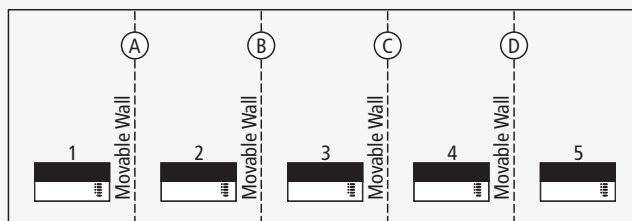

4-BUTTON MASTER CONTROL WALLSTATION

EGRX-4M-^{2,3}

- Each of four buttons toggles selected **GRAFIK Eye** Control Unit(s) between Scene 1 and off
- Last button can be all on (Scene 1) -or- all off for selected **GRAFIK Eye** Control Unit(s)
- Mounts in UK/German Wallbox (Lutron P/N 241-683)
- On-button and wallplate engraving available

Footnotes, pg. 51

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.48" (12mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

SLIM BUTTON



Dimensions

W: 2.75" (70mm)

H: 4.50" (114mm)

D: 1.16" (29mm)²

Wallbox Size: single-gang



Dimensions

W: 2.75" (70mm)

H: 4.50" (114mm)

D: 1.16" (29mm)¹

Wallbox Size: single-gang



Dimensions

W: 4.50" (114mm)

H: 4.50" (114mm)

D: 1.16" (29mm)¹

Wallbox Size: two-gang

Product

Model

Color

Suffix

4-SCENE WALLSTATION WITH OFF AND RAISE/LOWER

NTGRX-KP5^{-2,3}

- Optional Functions (Can be selected in the field)
 - Recalls preset light levels for four scenes (1-4 or 6-9) plus off with fine-tuning
 - or —
 - Recalls five scenes (1-5 or 6-10) plus off with full-on (Scene 16)
- Amber status LEDs standard

9-SCENE WALLSTATION WITH OFF AND RAISE/LOWER

NTGRX-KP10^{-2,3}

- Optional Functions (Can be selected in the field)
 - Recalls preset light levels for nine scenes (1-9 or 6-14) plus off with fine-tuning
 - or —
 - Recalls preset light levels for 10 scenes (1-10 or 6-15) plus off with full-on (Scene 16)
- Amber status LEDs standard

14-SCENE WALLSTATION WITH OFF AND RAISE/LOWER

NTGRX-KP15^{-2,3}

- Optional Functions (Can be selected in the field)
 - Recalls preset light levels for Scenes 1-14 plus off with fine-tuning
 - or —
 - Recalls preset light levels for Scenes 1-15 plus off with full-on (Scene 16)
- Amber status LEDs standard

Footnotes, pg. 52

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.35" (9mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

Ordering Example

NTGRX-KP5-WH
add color/finish suffix to model #

Matte Finishes

Standard, ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ
Anodized Aluminum	
Clear	CLA
Black	BLA
Brass	BRA

Customization

Ships in 4-6 weeks.

- See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
- See pg. 143 for engraving schedules.

Locking Covers

- See pg. 64 for more information.

LARGE BUTTON



Dimensions

W: 2.75" (70mm)
H: 4.50" (114mm)
D: 1.16" (29mm)¹

Wallbox Size:
single-gang



Dimensions

W: 4.50" (114mm)
H: 4.50" (114mm)
D: 1.16" (29 mm)¹

Wallbox Size: two-gang



Dimensions

W: 2.75" (70mm)
H: 4.50" (114mm)
D: 1.16" (29mm)¹

Wallbox Size:
single-gang



Dimensions

W: 4.50" (114mm)
H: 4.50" (114mm)
D: 1.16" (29 mm)¹

Wallbox Size: two-gang

Product

Model

Color

Suffix

5-SCENE WALLSTATION WITH OFF

NTGRX-LB6-^{2,3}

- Recalls preset light levels for five scenes (1-5 or 9-13) plus off
- Amber status LEDs standard

8-SCENE WALLSTATION WITH OFF

NTGRX-LB9-^{2,3}

- Recalls preset light levels for eight scenes (1-8 or 9-16) plus off
- Amber status LEDs standard

3-SCENE WALLSTATION WITH OFF AND RAISE LOWER

NTGRX-LB6-RL-^{2,3}

- Recalls preset light levels for three scenes (1-3 or 9-11) plus off with fine-tuning of light levels
- Amber status LEDs standard

6-SCENE WALLSTATION WITH OFF AND RAISE LOWER

NTGRX-LB9-RL-^{2,3}

- Recalls preset light levels for six scenes (1-6 or 9-14) plus off with fine-tuning of light levels
- Amber status LEDs standard

Footnotes, pg. 53

- 1 Depth includes wallplate and backbox. Wallplate depth is 0.35" (9mm).
- 2 Class 2/PELV control wiring.
- 3 Counts as one of 16 maximum Control Station Devices.

Ordering Example

NTGRX-LB6-WH
add color/finish suffix to model #

Matte Finishes

Standard, ships in 48 hrs.

White	WH
Ivory	IV
Beige	BE
Gray	GR
Brown	BR
Black	BL

Metal Finishes

Ships in 4-6 weeks.

Bright Brass	BB
Bright Chrome	BC
Bright Nickel	BN
Satin Brass	SB
Satin Chrome	SC
Satin Nickel	SN
Antique Brass	QB
Antique Bronze	QZ
Anodized Aluminum	
Clear	CLA
Black	BLA
Brass	BRA

Customization

Ships in 4-6 weeks.

- See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
- See pg. 143 for engraving schedules.

Locking Covers

- See pg. 64 for more information.

ARCHITRAVE™



Dimensions

W: 1.75" (44mm)
 H: 4.50" (114mm)
 D: 1.63" (41mm)³
 Wallbox:
 P/N 241-399
 1.25" (32mm) x 3.80" (97mm) x 2.75" (70mm)



Dimensions

W: 1.50" (38mm)
 H: 5.16" (131mm)
 D: 1.99" (51mm)³
 Wallbox:
 P/N 241-663
 1.25" (32mm) x 4.40" (112mm) x 2.75" (70mm)

Product

SLIM-BUTTON WALLSTATION

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off
- Fine-tuning of light levels with master raise/lower button
- Mounts in Lutron-supplied wallbox (P/N 241-399)
- Standard finishes are bright brass (BB) and white (WH)
- Contact Customer Service for other finishes

Model

GRX-4S-DW-^{1,2}

Color

Suffix

Ordering Example

GRX-4S-DW-WH
 add color/finish suffix to model #

Metal Finishes

Ships in 4-6 weeks.
 White WH
 Bright Brass BB

Customization

Ships in 4-6 weeks.
 • See pg. 12 for multigang wallplates, color matching, engraving/silk screening, and custom controls.
 • See pg. 143 for engraving schedules.

LARGE-BUTTON WALLSTATION

GRX-4SLB-DW-^{1,2}

- Recalls preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off
- Fine-tuning of light levels with master raise/lower button
- Mounts in Lutron-supplied wallbox (P/N 241-663)
- Standard finishes are bright brass (BB) and white (WH)
- Contact Customer Service for other finishes

Footnotes, pg. 54

- 1 Class 2/PELV control wiring.
- 2 Counts as one of 16 maximum Control Station Devices.
- 3 Depth includes wallplate and backbox; wallplate depth is 0.13" (3mm).




Dimensions

W: 1.50" (38mm)
H: 5.69" (145mm)
D: 0.88" (22mm)



Dimensions

W: 1.50" (38mm)
H: 5.69" (145mm)
D: 0.88" (22mm)

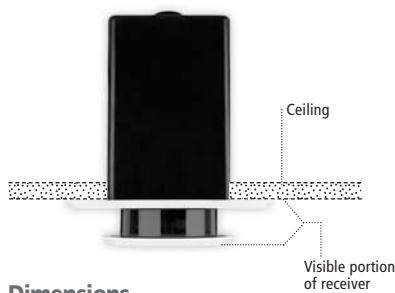

Dimensions

diameter: 3.50" (89mm)
depth: 3.00" (76mm)

Product	Model	Color	Suffix
4-SCENE WIRELESS INFRARED REMOTE CONTROL	GRX-IT-WH		
<ul style="list-style-type: none"> Recalls preset light levels for four scenes plus off (scenes dependent on receiver settings) Fine-tuning of light levels with master raise/lower 50' (15m) line-of-sight range to receiver Does not count as one of 16 maximum Control Station Interfaces Infrared frequency is 40kHz Available in white (WH) only Engraving available. Add -E to end of model; see engraving schedule, pg. 143 			<p>Ordering Example GRX-IT-WH-E Ships in 48 hrs.</p> <p>Engraving Ships in 4-6 weeks. • See pg. 143 for engraving schedules.</p>
8-SCENE WIRELESS INFRARED REMOTE CONTROL	GRX-8IT-WH		
<ul style="list-style-type: none"> Recalls preset light levels for eight scenes plus off (scenes dependent on receiver settings) Fine-tuning of light levels with master raise/lower 50' (15m) line-of-sight range to receiver Does not count as one of 16 maximum Wallstations/Control Interfaces Infrared frequency is 40kHz Available in white (WH) only Engraving available. Add -E to end of model; see engraving schedule, pg. 143 			
CEILING-MOUNTED INFRARED RECEIVER	GRX-CIR-WH^{1,2}		
<ul style="list-style-type: none"> Receives signal from Infrared Wireless Remote Control Allows recall of preset light levels for four scenes (1-4, 5-8, 9-12, or 13-16) plus off with four-scene Wireless Remote Control (GRX-IT-WH) Recalls eight scenes (1-8, 5-12, 9-16, or 13-16/1-4) plus off with eight-scene Wireless Remote Control (GRX-8IT-WH) Fine-tuning of light levels with Wireless Remote Control 360° reception range, 50' (15m) line-of-sight range from Wireless Remote Control to receiver Mounts in 2.19" (56mm) x 2.19" (56mm) collar provided by Lutron Available in white (WH) only 			
<p>Footnotes, pg. 55</p> <p>1 Class 2/PELV control wiring. 2 Counts as one of 16 maximum Control Station Devices.</p>			