


# 421 DMX-512 COMBINER

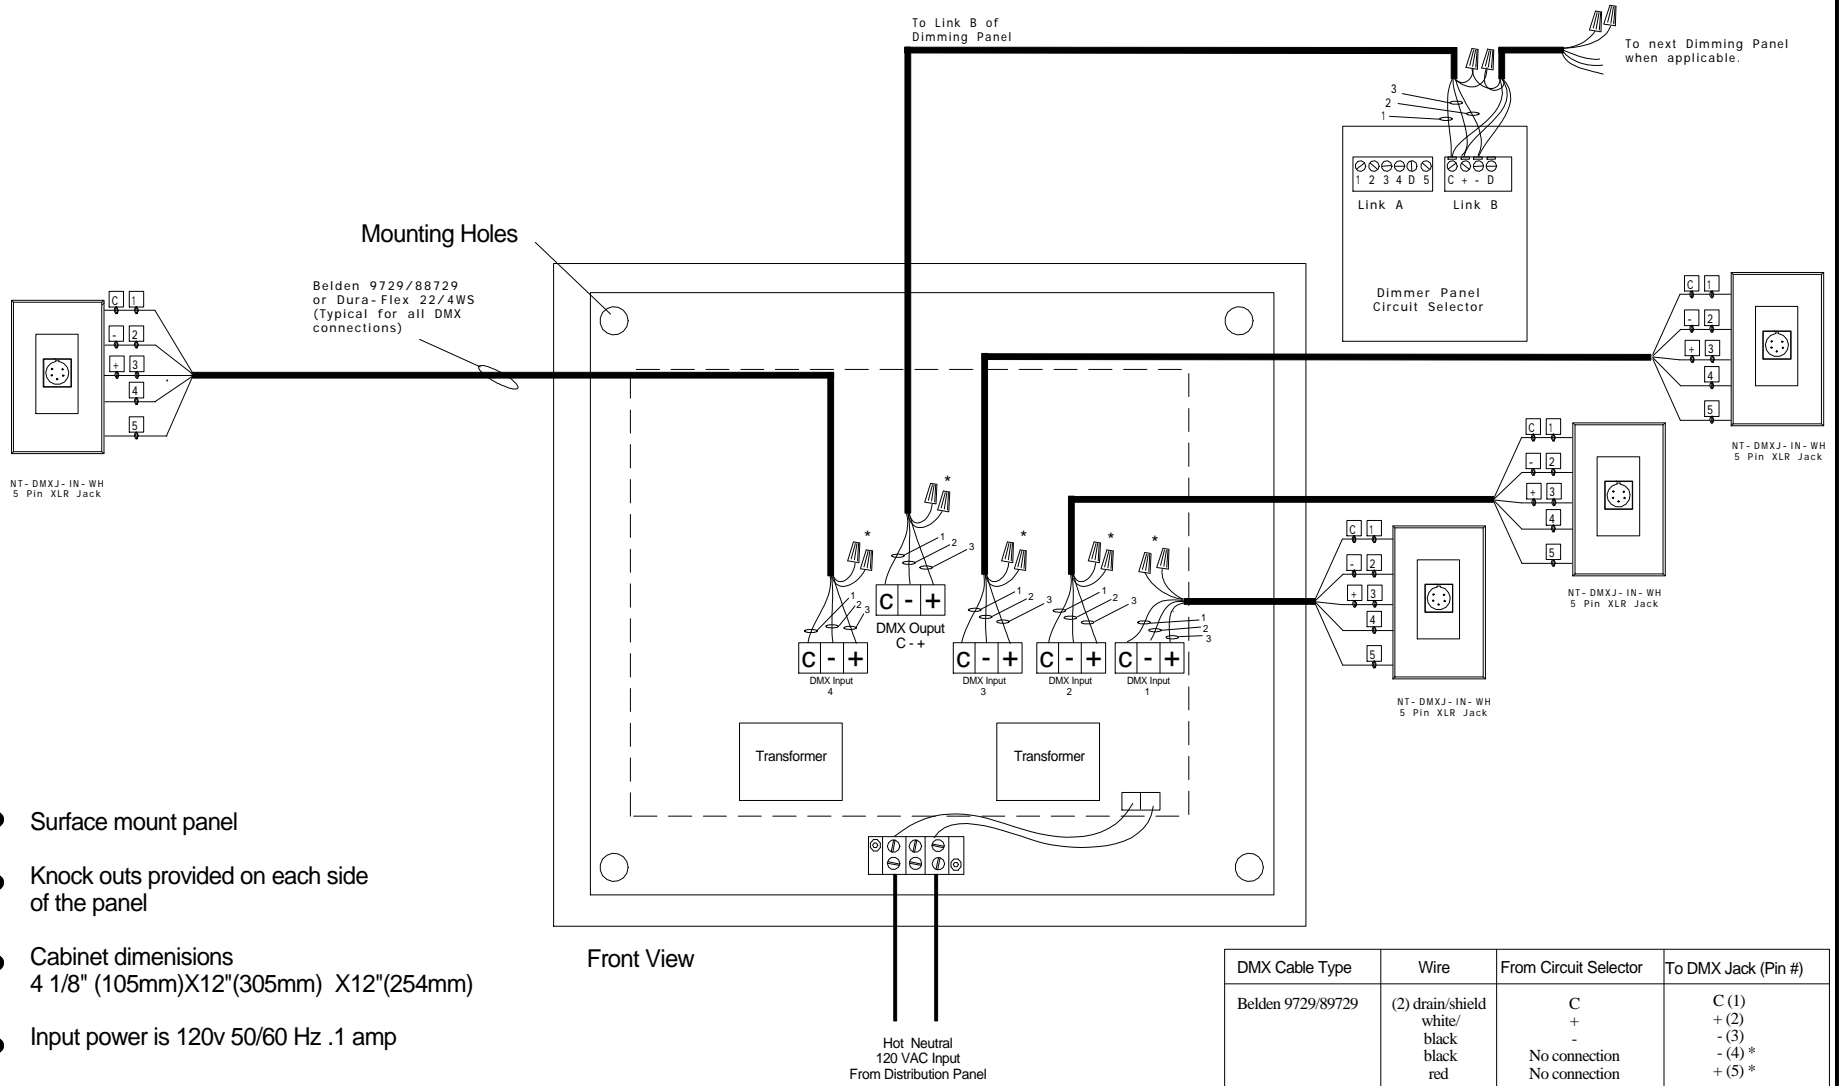

Belden 9729/88729  
or Dura-Flex 22/4WS  
(Typical for all DMX  
connections)

Mounting Holes

NT-DMXJ-IN-WH  
5 Pin XLR Jack

NT-DMXJ-IN-WH  
5 Pin XLR Jack

NT-DMXJ-IN-WH  
5 Pin XLR Jack

NT-DMXJ-IN-WH  
5 Pin XLR Jack

Hot Neutral  
120 VAC Input  
From Distribution Panel

- Surface mount panel
- Knock outs provided on each side of the panel
- Cabinet dimensions  
4 1/8" (105mm) X 12" (305mm) X 12" (254mm)
- Input power is 120v 50/60 Hz .1 amp

Front View

DMX Cable Type	Wire	From Circuit Selector	To DMX Jack (Pin #)
Belden 9729/89729	(2) drain/shield white/ black black red	C + - No connection No connection	C (1) + (2) - (3) - (4) * + (5) *
Duraflex (Lutron) 22/4WS	drain/shield white/ black green red	C + - No connection No connection	C (1) + (2) - (3) - (4) * + (5) *

\* Wires 4 & 5 must be daisy chained through all connections and capped at both ends.

**LUTRON**®  
COOPERSBURG, PA 18036  
PHONE: (610) 282-3800  
FAX: (610) 282-1146