


WIRING LEGEND:

- INPUT POWER (NORMAL)
- 2 #12AWG (4 mm²)
- 2-WAY RF COMMUNICATION
- CAT5E OR BETTER CABLE FOR LUTRON NETWORK. TERMINATED WITH RJ45 CONNECTORS (TO BE PROVIDED BY OTHERS). 328 ft. (100 m) MAXIMUM RUN.


CASETA ORIGINAL

L-BDGPRO2-WH

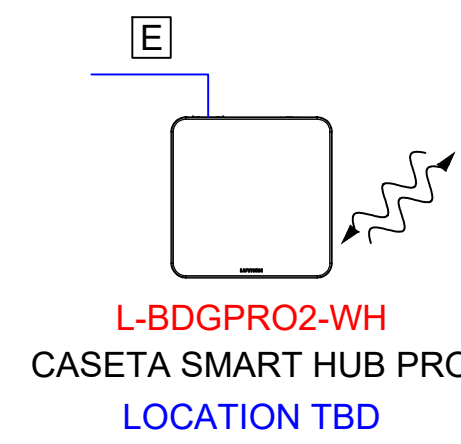


L-BDGPRO2-WH
CASETA SMART HUB PRO
LOCATION TBD

L-BDG2-WH

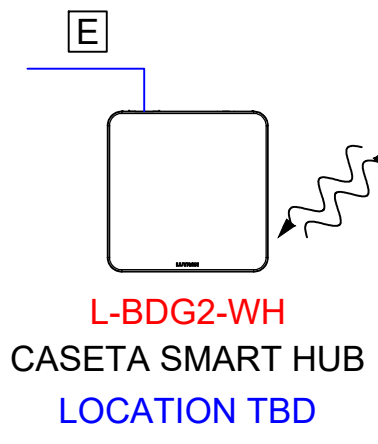


L-BDG2-WH
CASETA SMART HUB
LOCATION TBD

PD-REP-WH

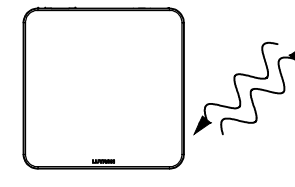


PD-REP-WH
CASETA REPEATER
LOCATION TBD

ROUTER

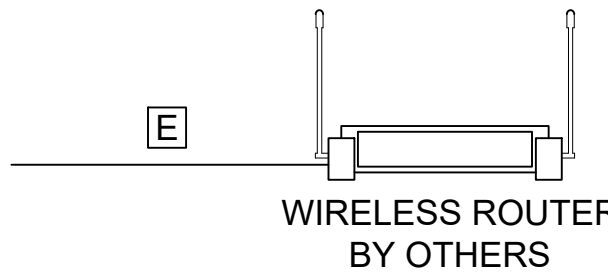


WIRELESS ROUTER
BY OTHERS

PD-6ANS-WH

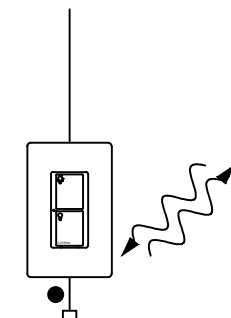


PD-6ANS-WH
120V~, 50/60 Hz
CASETA ORIGINAL IN-WALL SWITCH
NEUTRAL WIRE REQUIRED
2 BUTTON CONTROL
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

PD-5WS-DV-WH

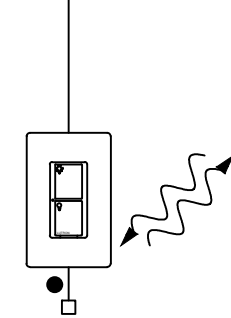


PD-5WS-DV-WH
120/277V~, 50/60 Hz
CASETA ORIGINAL IN-WALL SWITCH
2 BUTTON CONTROL
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

PD-6WCL-WH

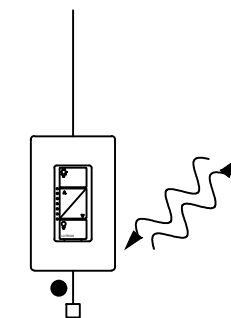


PD-6WCL-WH
120V~, 50/60 Hz
CASETA ORIGINAL IN-WALL DIMMER
LED, CFL, INC. & HAL LOADS
2 BUTTON CONTROL WITH RAISE/LOWER
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

PD-FSQN-WH

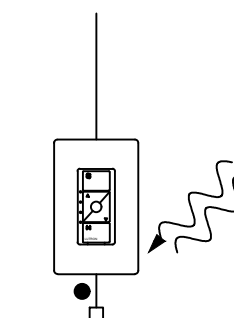


PD-FSQN-WH
120V~, 50/60 Hz
CASETA ORIGINAL
FAN SPEED CONTROL
3 BUTTON CONTROL W/ RAISE/LOWER
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

PD-3PCL-WH

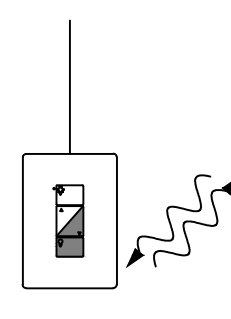


PD-3PCL-WH
120V~, 50/60 Hz
CASETA ORIGINAL PLUG-IN DIMMER
DIMS LED, CFL, INC. & HAL LOADS
2 BUTTON CONTROL WITH RAISE/LOWER
LOCATION TBD

PD-10NXD-WH

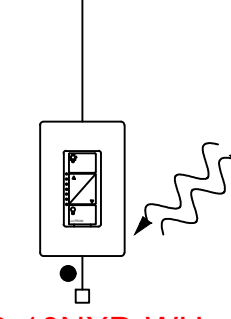


PD-10NXD-WH
120V~, 50/60 Hz
CASETA ORIGINAL
IN-WALL PRO DIMMER
LED, CFL, INC. & HAL LOADS
2 BUTTON CONTROL W/ RAISE/LOWER
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

PD-5NE-WH

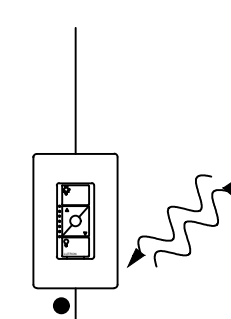


PD-5NE-WH
120V~, 50/60 Hz
CASETA ORIGINAL ELV+ DIMMER
LED, CFL, INC, HAL, MLV, & ELV LOADS
3 BUTTON CONTROL W/ RAISE/LOWER
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

PD-OSENS




PD-OSENS
CASETA OCCUPANCY/VACANCY
SENSOR
180° COVERAGE
4.35"[110mm] (H) X 1.8"[46mm] (W) X 1.35"[34mm] (D)
*DEVICE CAN BE WALL-MOUNTED
AND IS BATTERY POWERED
(POWER FEED NOT REQUIRED)
LOCATION TBD

L-HWLV2-WIFI




L-HWLV2-WIFI
LUTRON WIFI THERMOSTAT
POWERED BY HONEYWELL HVAC TECHNOLOGY
4.625"(H) X 4.938"(W) X 1.125"(D)
(118mm X 126mm X 29mm)
LOCATION TBD

L-HWLV-WIFI




L-HWLV-WIFI
VISIONPRO WI-FI THERMOSTAT
4.94"[125mm] (H) X 6.56"[167mm] (W) X 1.44"[37mm] (D)
LOCATION TBD

PD-15OUT-BL

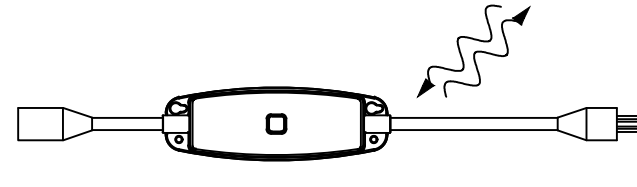

PD-15OUT-BL
120V~, 50/60 Hz
CASETA OUTDOOR SMART PLUG
SWITCHES 15A / 0.5HP / 1200 VA MAX
EXTERIOR-RATED (IP65)
6.875"(H) X 2.25"(W) X 1.5"(D)
(175mm X 57mm X 38mm)
RECEPTACLE CORD LENGTH: 5.125" (130mm)
PLUG CORD LENGTH: 7" (178mm)
LOCATION TBD


PD-VSENS



PD-VSENS
CASETA VACANCY SENSOR
180° COVERAGE
4.35"[110mm] (H) X 1.8"[46mm] (W) X 1.35"[34mm] (D)
*DEVICE CAN BE WALL-MOUNTED
AND IS BATTERY POWERED
(POWER FEED NOT REQUIRED)
LOCATION TBD


CASETA SMART

DVRF-5NS-WH

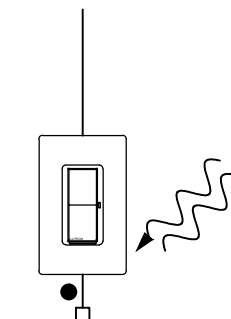


DVRF-5NS-XX
120V~, 50/60 Hz
CLARO SMART SWITCH FOR CASÉTA
LED, CFL, INC, HAL, MLV, & ELV & FAN LOADS
ON/OFF BUTTON CONTROL W/ STATUS LED
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

DVRF-6L-WH

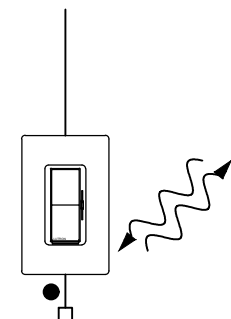


DVRF-6L-XX
120V~, 50/60 Hz
DIVA SMART DIMMER FOR CASÉTA
LED, CFL, INC & HAL LOADS
ON/OFF BUTTON CONTROL
W/ SLIDER FOR DIMMING & STATUS LED
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

DVRF-5NE-WH

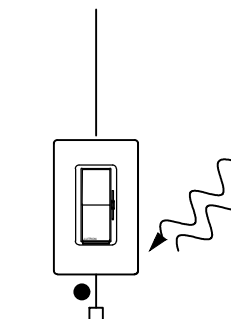

DVRF-5NE-XX
120V~, 50/60 Hz
CASÉTA DIVA SMART ELV+ DIMMER
LED, CFL, INC, HAL, MLV, & ELV LOADS
ON/OFF BUTTON CONTROL
W/ SLIDER FOR DIMMING & STATUS LED
SHOWN WITH CW-1-WH
CLARO WALLPLATE
(1 GANG US BACKBOX BY OTHERS)
LOCATION TBD

SERENA WOOD BLINDS

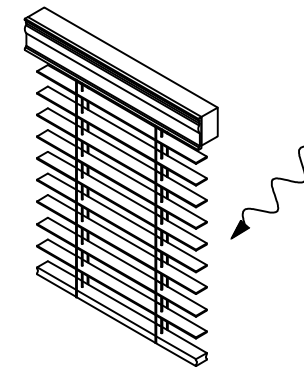

SERENA WOOD BLINDS WIRELESS EDU
CORDLESS, MANUAL LIFT & LOWER
WITH MOTORIZED TILT THROUGH
WIRELESS ELECTRONIC DRIVE UNIT
LOCATION TBD