


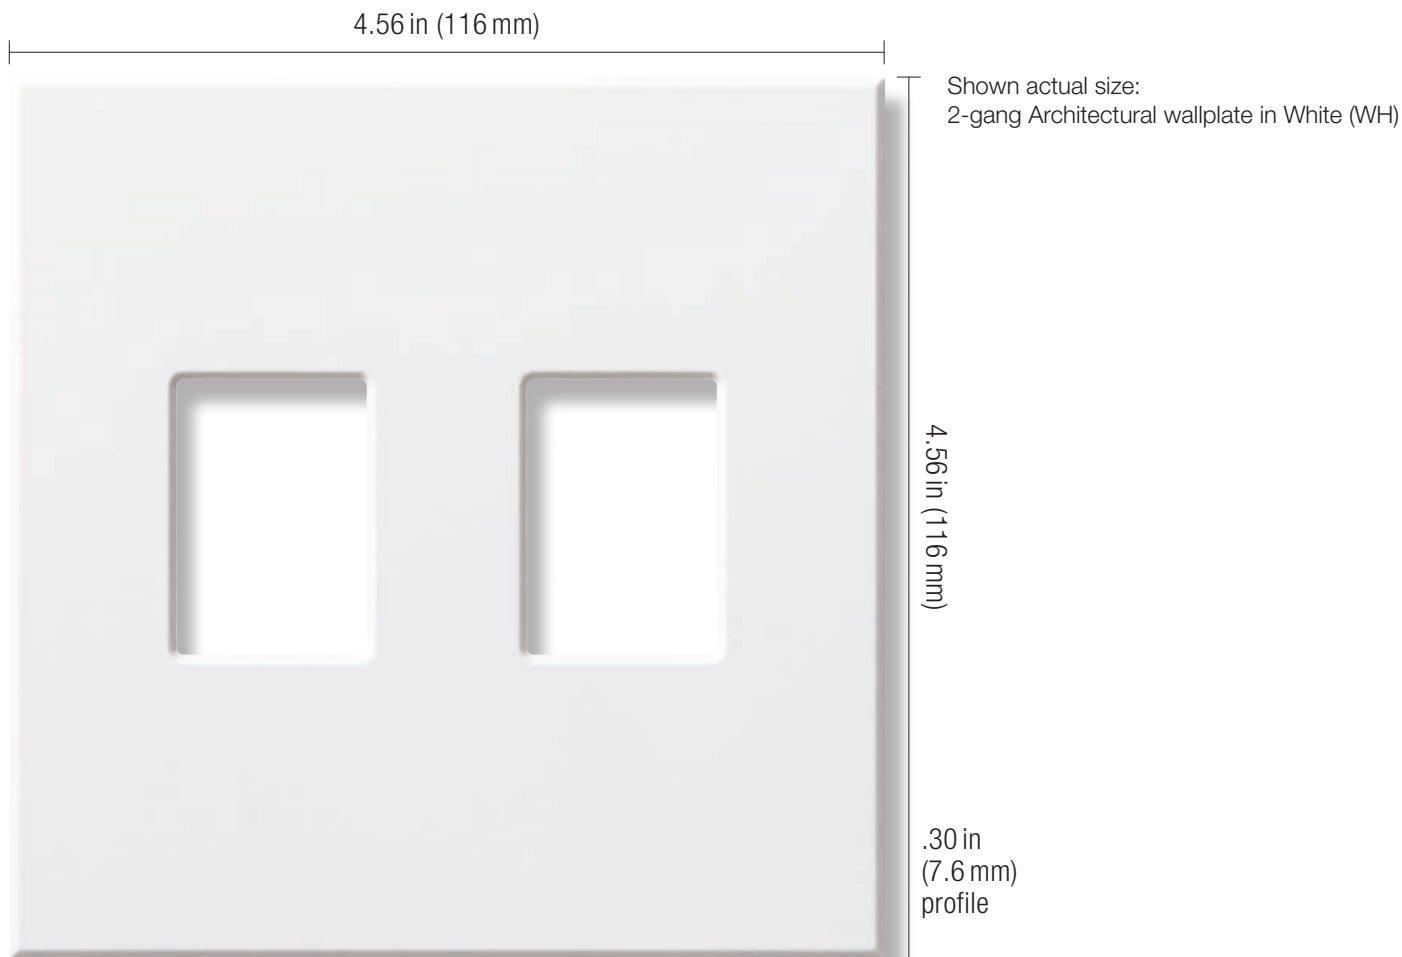

Product family features

- Can be used in conjunction with Nova T☆ dimmer and switch, and Architectural accessories
- Metal and glass finish wallplates with accessory openings can also be used with Designer wallplate opening controls and Designer accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Blank inserts available for accessory size opening (NT-BI-)
- Matte finish wallplates can be custom colored to perfectly match a paint color number, swatch or sample; contact Customer Service at 1.888.LUTRON1 for more information
- Customize your Architectural wallplate with engraving or by adding a corporate logo; visit lutron.com/engraving to get started


Ganging and derating

- Architectural wallplates in this section use standard ganging
 - Requires fins to be removed from dimmers for proper spacing
 - May require derating (i.e., reduction of dimmer capacity due to fin removal)
 - Custom multi-gang wallplates required for the following cases
 - Full-capacity ganging ("No Fins Broken")
 - Large Nova T☆ controls (1500/2000 W)
 - Nova controls
 - Color change applications
- For more information visit lutron.com/customganging.

Available finishes

Use **BOLD** color code in model number (Example: VWP-2-**SI**)

Architectural matte

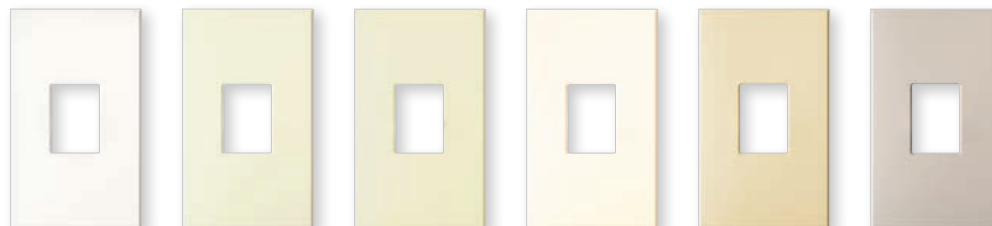

WH
White


LA
Light Almond

AL
Almond

BE
Beige

IV
Ivory

TP
Taupe

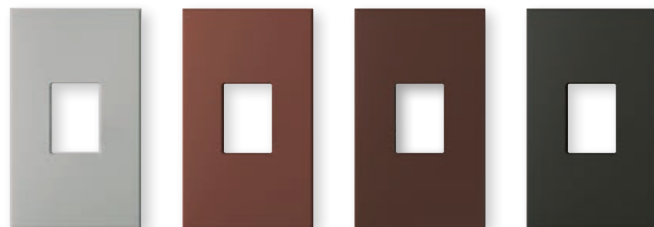


GR
Gray

SI
Sienna

BR
Brown

BL
Black

Architectural metal*

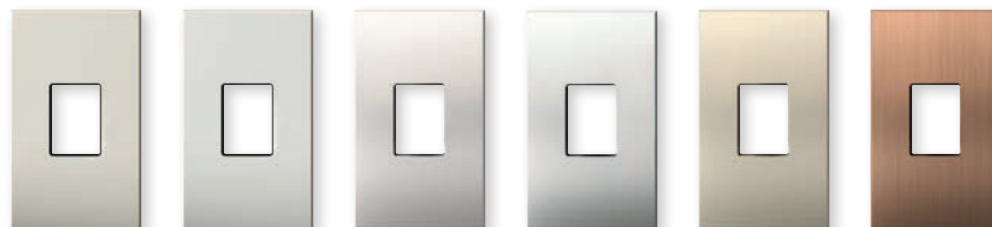

BN
Bright Nickel

BC
Bright Chrome


CLA
Clear Anodized
Aluminum

SC
Satin Chrome

SN
Satin Nickel


QZ
Antique Bronze

Architectural glass**



CWH
Clear Glass

GWH
Green Glass

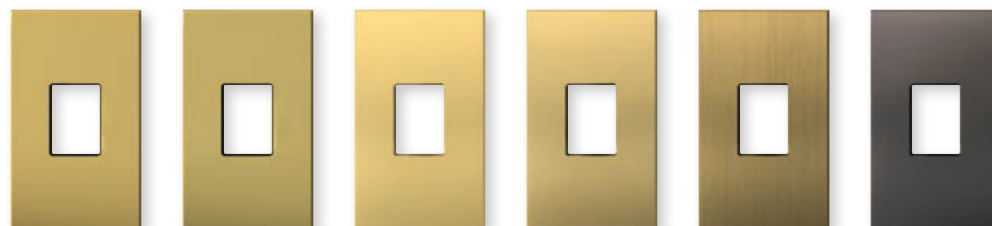

AU
Gold Plated

BB
Bright Brass

BRA
Brass Anodized
Aluminum

SB
Satin Brass

QB
Antique Brass

BLA
Black Anodized
Aluminum


* Metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

** Glass wallplates include white plastic trim/adaptor, visible from side. Match with separate White (WH) or Snow (SW) controls.


Wallplates for Nova T☆ controls and Architectural accessories



1-gang for one accessory*	LFGR-1- XXX ²
W: 2.75in (70mm)	
2-gang for two accessories*	VWP-2R- XX ¹
W: 4.56in (116mm)	LFGR-2- XXX ²
3-gang for three accessories*	LFGR-3- XXX ²
W: 6.44in (164mm)	



2-gang, for one dimmer or switch and one accessory	VWP-2CR- XX ¹
2-gang, for one accessory and one dimmer or switch	VWP-2RC- XX ¹
W: 4.56 in (116 mm)	



2-gang, for two dimmers or switches	VWP-2- XX ¹
W: 4.56in (116mm)	
3-gang, for three dimmers or switches	VWP-3- XX ¹
6.32in (161mm)	
4-gang, for four dimmers or switches	VWP-4- XX ¹
W: 8.45in (215mm))	

Important notes

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box, at lutron.com/applicationnotes.

XX¹: Architectural matte color codes
XXX²: Architectural glass color codes
For metal finishes visit lutron.com/customganging for more information.

Multi-gang dimmer installations may require derating.

* Glass wallplates include white plastic trim/adaptor, visible from side. Match with separate White (WH) or Snow (SW) controls.

Cable jack



- F-style, 75-Ohm coaxial cable
- Includes 1-gang wallplate

Single cable jack*

NT-CJ-**XX**¹

Telephone jack



- 6-conductor jack, RJ11
- Includes 1-gang wallplate

Single telephone jack*

NT-PJ-**XX**¹

6-port frame



- Shipped with six blanks in matching colors
- Connectors sold separately
- Connectors snap in (no tools required)
- Includes 1-gang wallplate
- Connectors available in White (WH) unless noted

Field customizable 6-port frame

6-port frame*

NT-6PF-**XX**¹

Connectors for 6-port frame



Telephone/network jacks

8-conductor, RJ45 category 5e	CON-1P-C5E- XX ²
8-conductor, RJ45 category 6	CON-1P-C6- XX ²

Fiber jacks



MT-RJ feed through CON-1F-MTRJ-WH



SC simplex CON-1F-SC-WH



LC non-flush mount CON-1F-LC-WH



ST-style CON-1F-ST-WH



Cable jack

F-style, 75-Ohm coaxial cable	CON-1C- XX ²
-------------------------------	--------------------------------



BNC jack

BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

XX¹: Architectural matte color codes (1-gang wallplate included)
XX²: Available in White (WH) and Black (BL)

* Metal and glass finishes are only available as separate wallplates.

Receptacles



- Includes 1-gang wallplate

Receptacles

15A 125V	NTR-15- XX ¹
20A 125V	NTR-20- XX ¹

Tamper-resistant receptacles*

15A 125V	NTR-15-TR- XX ¹
20A 125V	NTR-20-TR- XX ¹

USB receptacles



- Includes two USB ports
- Ports are rated for a minimum of 10,000 insertions and removals
- Includes 1-gang wallplate

Tamper-resistant USB receptacles*

15A 125V	NTR-15-UBTR- XX ¹
----------	-------------------------------------

GFCI receptacles



- Self-testing technology allows GFCI to automatically check proper operation every 30 seconds
- LEDs indicate status of GFCI protection function
- Press reset button to reset GFCI after circuit interruption
- Includes 1-gang wallplate

Tamper-resistant, self-testing GFCI receptacles*

15A 125V, GFCI	NTR-15-GFST- XX ¹
20A 125V, GFCI	NTR-20-GFST- XX ¹

Isolated ground receptacles



- Receptacle is orange for easy ID and circuit delineation
- Model number color code is for wallplate only
- Includes 1-gang wallplate

Isolated ground receptacles*

15A 125V	NTR-15-IG-OR- XX ¹
20A 125V	NTR-20-IG-OR- XX ¹

XX¹: Architectural matte color codes (1-gang wallplate included)

* Metal and glass finishes are only available as separate wallplates.

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plug for dimming table and floor lamps
- Includes 1-gang wallplate
- Tamper-resistant shutter mechanism

Dual dimming, tamper-resistant receptacles*

15 A	120/125 V	NTR-15-DDTR- XX ¹
20 A	120/125 V	NTR-20-DDTR- XX ¹

Receptacles for half dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plug for dimming table and floor lamps
- Bottom half is a general use receptacle and will fit standard duplex plugs
- Includes 1-gang wallplate
- Tamper-resistant shutter mechanism

Half dimming, tamper-resistant receptacles*

15 A	120/125 V	NTR-15-HDTR- XX ¹
20 A	120/125 V	NTR-20-HDTR- XX ¹

Replacement plugs for dimming



- Required for use with Lutron receptacles for dimming purposes—plug will also work in a standard receptacle
- Easily replaces the existing plugs on lamps

Replacement dimming plugs

120/125 V	RP-FDU-10- XX ²
UL/CSA/NOM regulatory approvals	

Important notes

- Receptacles and plugs for dimming use are UL Listed for use with all Lutron wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired, with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For more information on dimming lamps, consult Lutron Application Note #109, Guide to Dimming Portable Lamps via Receptacles, at lutron.com/applicationnotes.

XX¹: Architectural matte color codes (1-gang wallplate included)
XX²: Available in White (WH) and Brown (BR)

* Metal and glass finishes are only available as separate wallplates.