

D3 Wall Wash, Square

PRODUCT DESCRIPTION

Ketra full spectrum 3 in (76.2 mm) recessed LED downlights are available in fixed, adjustable, and wall-wash options to complete any lighting design project.




FEATURES

High Def Palette—covers a wide range of 16.7 million colors, including pastels, saturated colors and high CRI whites spanning from 1,400K to 10,000K.

Dynamic Spectrum—precisely tunes the amount of energy across the visible spectrum to produce Natural Light, Natural Dimming and Vibrancy.


TruBeam—produces uniform color across any available beam angle.

Color Lock—maintains your desired color point at a one-step MacAdam Ellipse across all Ketra product families and over each product’s lifetime.

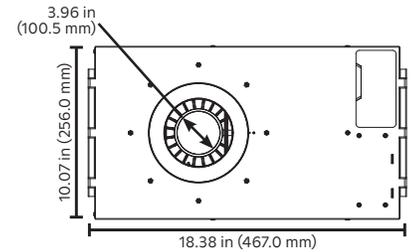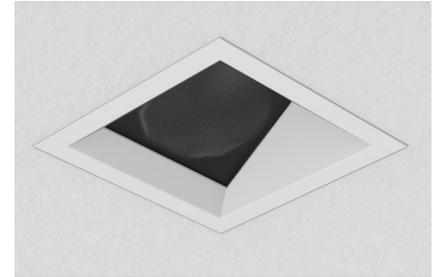


IC Housing

OPTIONS



Flanged




Flangeless Mud-in



Flangeless Millwork

Finish



White




Black



Silver



Bronze



Paintable White

SPECIFICATIONS¹

Optical Performance

Delivered Lumens ²			
Beam Angle (1 in [25.4 mm] recess) ³	9 W	13 W	18 W
Wall Wash	414 lm	573 lm	705 lm
CRI (Ra)	>90 (R9>90) 2400K-5000K TYP		
Lumen Maintenance ⁴	50,000 hours to L70 @ 25°C T_A		
Color Point Range ⁵	1400K – 10,000K, Fully Saturated, & Pastel		
Equivalent Traditional Lamp	75 W halogen		
Dimming Protocol	Wireless RF/CCX (Lutron Clear Connect-Type X)		
Dimming Range ⁵	0.1 - 100%		
Delivered Efficacy			
Beam Angle (1 in [25.4 mm] recess)	9 W	13 W	18 W
Wall Wash	46 lm/W	44 lm/W	39 lm/W

Environmental

Ambient Temperature (T _A)	0 - 40 °C⁶
Extended Operating Temperature	-35 - 0 °C⁷
Humidity	0 - 95%, Non-condensing
Certification	UL, cUL, 120 V~: FCC Class B, 277 V~: FCC Class A, Title 24 [JA8]* IC fixtures are rated for spray foam applications⁶
Location	UL Damp Location, UL Wet Location (shower) available with Trim Lens. UL2043 and CAN/ULC-S142 rated for use in air handling spaces (plenums)
Outdoor/Indoor	Outdoor use available for residential enclosed/covered patio applications. Trim lens required
Warranty	5 year fixture, LED and dimming warranty

Mechanical

Mounting Options	Hanger Bars/ Butterfly Brackets
Field Replaceable Optics	Yes
Field Replaceable Light Engine	Yes
Field Replaceable Power Supply	Yes
Fixture Weight	7.75 lb (3.51 kg)
Housing Material	Powder Coated Steel, Polymer
Lens Material	PMMA

Dimensions

Ceiling Square Cut-out	4 in (101.6 mm) flanged; 5.5 in (139.70 mm) flangeless mud-in; 4 in (101.6 mm) flangeless millwork
Trim Outside Dimension	4.63 in (117.6 mm) flanged; 3.75 in (95.2 mm) flangeless mud-in; 4 in (101.6 mm) flangeless millwork
Trim Thickness	¼ in (1.6 mm)
Optics Outside Dimension	2.5 in (63.5 mm)
Trim Depth	1 in (25.4 mm)
Ceiling Thickness (min-max)	Flanged, flangeless mud-in: 0.625 - 1.5 in (15.8 - 38.1 mm) Flangeless millwork collar: 0.625 - 2.5 in (15.8 - 63.5 mm)
Adjustability	Tilt Fixed at 20° 364° Rotation
Service Position	Tilt to 40° Full 364° Rotation
Modular Emitter/LED Module (tool-free)	0.75 in (19 mm)
Housing Vertical Adjustment via Butterfly Bracket	1.75 in (44.5 mm)
Housing Height	3.50 in (88.9 mm)
Housing Length	18.38 in (466.8 mm)
Housing Width	10 in (254 mm)

Electrical

Power Consumption	D3.09 9 W D3.13 13 W D3.18 18 W
Power Factor	>0.9
Inrush Current ⁸	800 mA, 0.2 mS duration
Surge Protection	2.5 KV
Voltage	120 V~ 60 Hz 277 V~ 60 Hz
Emergency Lighting	Evaluated by UL⁹ for use in emergency lighting systems in accordance with standard UL⁹ 924 and CSA C22.2 No. 141 when paired with the LVS¹⁰ model LUT-SHUNT-A-TD (UL⁹ file E206507)⁹.

¹ All performance measurements taken with 1 in (25.4 mm) white trim, with light engine at nadir and 1 in (25.4 mm) regress, at 3000 K, 25 °C ambient, 100% power input, default vibrancy, unless otherwise stated.

² Lumen measurement complies with IES LM-79-08 testing procedures.

³ Tilt and Beam Angle are fixed for wall wash applications. Wall wash housings are field changeable to be adjustable. See D3 Installation Guide for more details.

⁴ Lumen maintenance values calculated in accordance to TM-21 procedures based on LM-80 compliant measurement data.

⁵ Intensity and color point control requires compatible system.

⁶ Rated for direct application of spray foam with less than R-21 insulative value or 3 in (76.2 mm) of closed cell spray foam. 95 °F (35 °C) maximum operating temperature.

⁷ Color accuracy not guaranteed in Extended Operating Temperature range.

⁸ For more information on inrush current, refer to Ketra's Inrush App Note in the Support section of our website.

⁹ See Lutron Application Note 106 (P/N 048106) at www.lutron.com for wiring details. This is only applicable to CCX fixtures used in an Athena system.

* All products in the D3 family are Title 24 JA8 compliant. For more information please contact customer service at ketrasales@lutron.com or 844.588.6445.

ORDERING GUIDE

Please download this PDF to use the interactive drop down features of the ordering guide.

Housing

Product Line	Fixture / Trim	Power Consumption	Control System
--------------	----------------	-------------------	----------------

Beam Angle	Region / Voltage	Housing Type	Shipping Option
------------	------------------	--------------	-----------------

Order code: _____

Trim

Product Line

Model	Trim Finish	Trim Lens
-------	-------------	-----------

Order code: _____

Product Line	Code	Beam Angle	Code	Product Line	Code
Commercial (Athena compatible)	CM-	Wall Wash	WW	Universal	UN-
Residential (HomeWorks compatible)	HW-	Region/Voltage		Model	
Fixture / Trim		120 V~ 60 Hz, North America	11	D3 Square Flanged Wall Wash ^{1,2}	D3TFSW1
D3 Wall Wash, Square Flanged ^{1,2}	D3WWSQ	277 V~ 60 Hz, North America	12	D3 Square Flangeless Mud-In Wall Wash ⁴	D3TXSW1
D3 Wall Wash, Square Flangeless ^{3,4,9}	D3WWSM	Housing Type		D3 Square Flangeless Millwork Wall Wash ^{3,4}	D3TMSW1
D3 Wall Wash, Collar Adapter Not Specified ⁸	D3WWXX	New Construction, IC/Airtight	NCIC	Trim Finish	
Power Consumption		New Construction, IC/Airtight, Flangeless Millwork Trim ³	NCIM	White	PWH
9 W	09	New Construction, IC/Airtight, Exterior Enclosed/Covered Porch (HomeWorks resi products only) ^{5,6}	NCOC	Black	PBK
13 W	13	New Construction, IC/Airtight, Exterior Enclosed/Covered Porch, Flangeless Millwork (HomeWorks resi products only) ^{5,6}	NCOM	Silver	PSR
18 W	18	Shipping Option		Bronze	PBZ
Control System		Single Pack	SP	Paintable White	CWH
CCX (Clear Connect-Type X)	GT	(Default, ships with Butterfly Brackets & 24 in Hanger Bars to be installed in field)		Trim Lens⁷	
				Wall Wash	W

1 D3 Wall Wash, Square flanged fixture (D3WWSQ) can only be used with flanged trims (D3TFSW1) and is compatible with NCIC/NCOC housing type, but is incompatible with NCIM/NCOM.
 2 Use flanged trims (D3TFSW1) on wood and stone ceilings with thickness in the range of 0.625 in - 1.5 in (15.8 mm - 38.1 mm) with NCIC/NCOC housing type.
 3 D3 Wall Wash, Square flangeless fixture (D3WWSM) can be used with a flangeless mud-in trim (D3TXSW1) with NCIC/NCOC housing type, or with a flangeless millwork trim (D3TMSW1) with NCIM/NCOM housing type.
 4 Use the flangeless millwork trims (D3TMSW1) on wood and stone ceilings with thickness in the range of 0.625 in - 2.5 in (15.8 mm - 63.5 mm) with NCIM/NCOM housing type.
 5 D3s are available for residential exterior applications only and must have a trim installed with a lens.
 6 D3s installed outdoors must use housing type NCOC or NCOM.
 7 Downlight is wet location rated when trim is installed with lens.
 8 Ceiling installation cannot begin until the collar adapter is installed (see the Component Ordering Guide for details).
 9 Millwork Trim Retainer supplied with Millwork Trim to ensure color match.

COMPONENT ORDERING GUIDE

Replacement Optics

Product Line Accessory Type Beam Angle

Order code: _____

Product Line	Code
Universal Part - Recessed Downlight	UN-D3
Accessory Type	
Optic	OP
Beam Angle	
Spot (15°) Low Glare	15L
Flood (25°) Low Glare	25L
Wide Flood (40°) Low Glare	40L
Very Wide Flood (60°) Low Glare	60L
Spot (15°) High Output	15H
Flood (25°) High Output	25H
Wide Flood (40°) High Output	40H
Very Wide Flood (60°) High Output	60H

Optics Accessories

Product Line Accessory

Order code: _____

Product Line	Code
Universal Part - Recessed Downlight	UN-D3
Accessory ^{1,2,3}	
Trim Lens, Round Bevel, Solite Flanged Trims Only	TLRDFS
Trim Lens, Round Bevel, Frost Flanged Trims Only	TLRDFE
Trim Lens, Round Mud-In, Solite Mud-in Trims Only	TLRDXS
Trim Lens, Round Mud-In, Frost Mud-in Trims Only	TLRDXF
Trim Lens, Pinhole, Solite	TLPINS
Trim Lens, Pinhole, Frost	TLPINF
Optic Accessory Solite	OAS
Optic Accessory Frost	OAF
Optic Accessory Hex Louver	OAH


Mounting & Installation Kits

Product Line Accessory

Order code: _____

Product Line	Code
Universal Part - Recessed Downlight	UN-D3
Accessory	
(2) Butterfly brackets	MA B
(2) 24 in (609 mm) Hanger bars	MA N

COMPONENT DIAGRAM

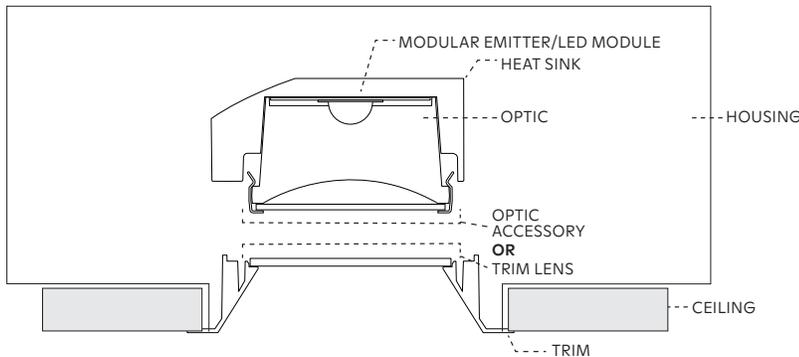

1 Downlight is wet location rated when trim is installed with lens.
 2 Only one optional optical or trim accessory can be used at a time.
 3 Downlights with outdoor housings require a trim installed with lens.

COMPONENT ORDERING GUIDE (cont.)

Rough-in
Housing

Order code: _____

Collar
Adapters

Order code: _____

Modular Emitter/
LED Module

Order code: _____

Rough-in Housing	Code	Collar Adapters¹	Code	Modular Emitter/LED Module	Code
Housing, No Collar	UN-D3ADXX	Collar Adapter, Round Flanged	UN-D3CTFR	Standard (25°, 40°, 60°) Modular Emitter/LED Module	UN-D3MEMTRST
Housing, Flanged Square Collar	UN-D3ADFS	Collar Adapter, Round Flangeless Mud-in ²	UN-D3CTXR	Spot (15°) Modular Emitter/ LED Module	UN-D3MEMTRSP
Housing, Mud-In Square Collar	UN-D3ADXS	Collar Adapter, Round Flangeless Millwork ³	UN-D3CTMR		
Housing, Millwork Square Collar	UN-D3ADMS				

Power Supply


Order code: _____

Power Supply	Code
Comm 9 W CCX 120 V~	CM-D3PS09GT11
Comm 9 W CCX 277 V~	CM-D3PS09GT12
Comm 13 W CCX 120 V~	CM-D3PS13GT11
Comm 13 W CCX 277 V~	CM-D3PS13GT12
Comm 18 W CCX 120 V~	CM-D3PS18GT11
Comm 13 W CCX 277 V~	CM-D3PS18GT12
Resi 9 W CCX 120 V~	HW-D3PS09GT11
Resi 9 W CCX 277 V~	HW-D3PS09GT12
Resi 13 W CCX 120 V~	HW-D3PS13GT11
Resi 13 W CCX 277 V~	HW-D3PS13GT12
Resi 18 W CCX 120 V~	HW-D3PS18GT11
Resi 13 W CCX 277 V~	HW-D3PS18GT12


¹ Ceiling installation cannot begin until collar adapter is installed.
² Mud-In Trim Retainer supplied with Mud-In Collar Adapter.
³ Millwork Trim Retainer supplied with Millwork Trim to ensure color match.

PRODUCT DIMENSIONS

Flanged Housing

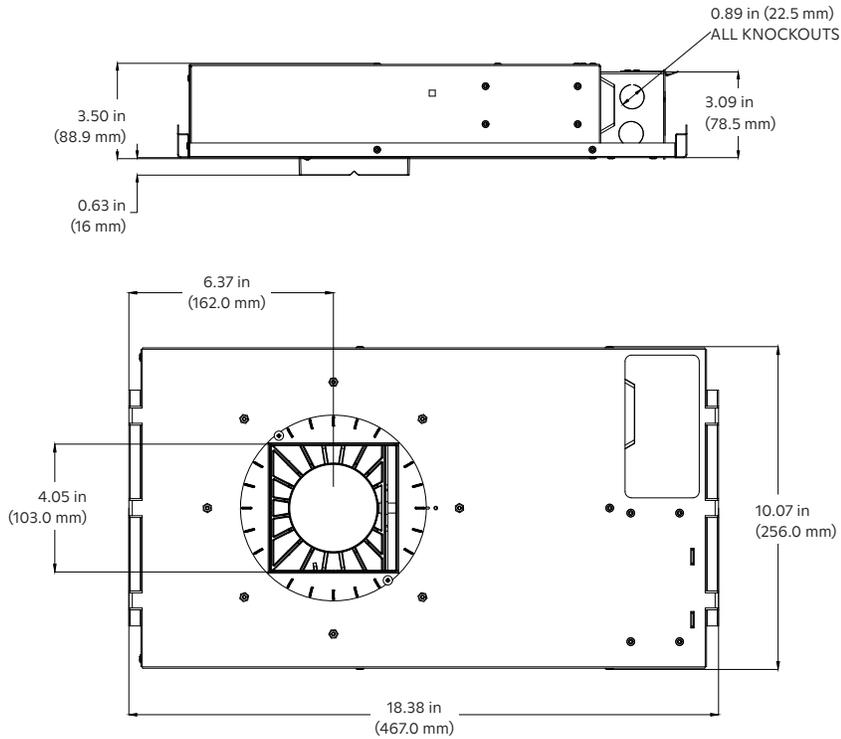


Flanged Trim

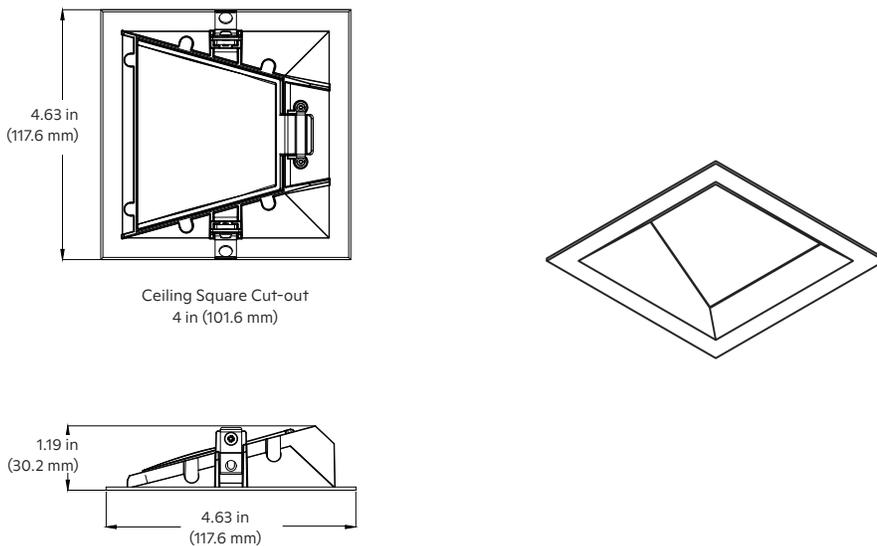


PRODUCT DIMENSIONS (cont.)


Flangeless Mud-in Housing

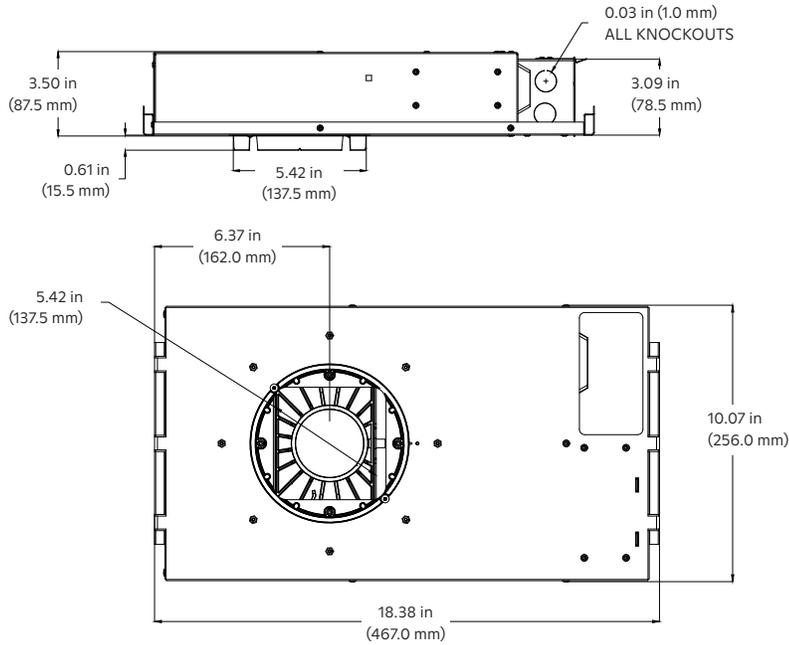

Flangeless Mud-in Trim Retainer

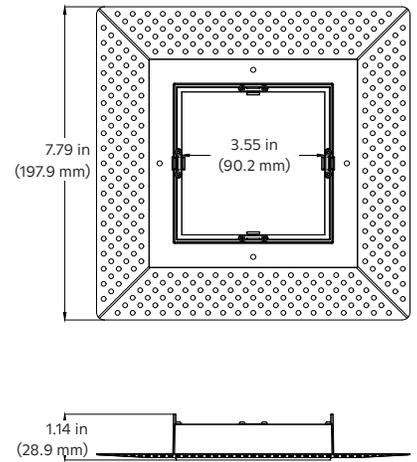


Flangeless Mud-In Trim

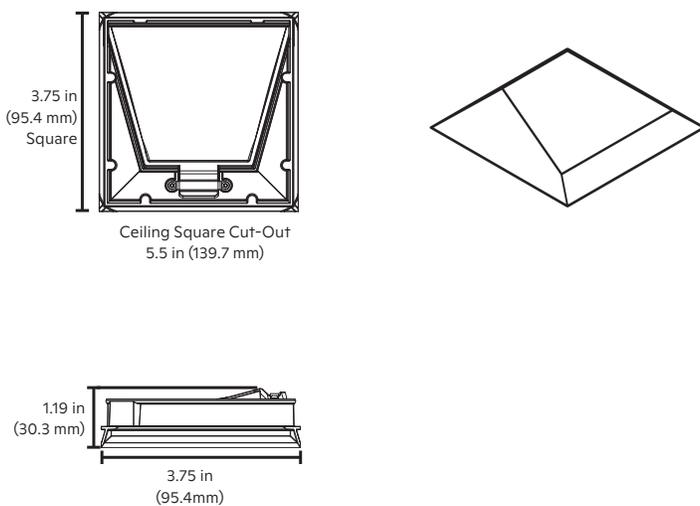


PRODUCT DIMENSIONS (cont.)


Flangeless Millwork Housing

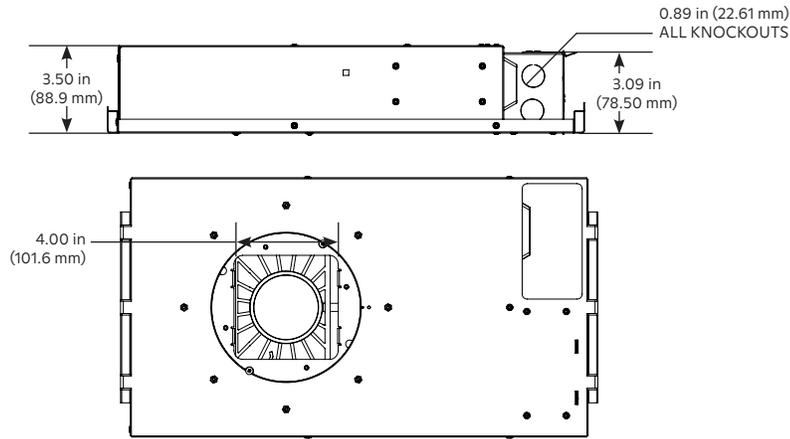

Flangeless Millwork Trim Retainer

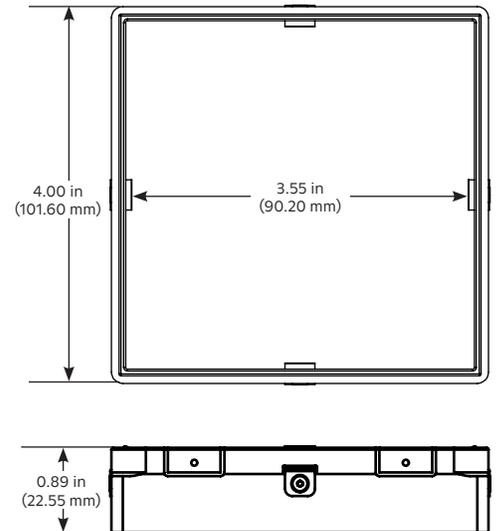


Flangeless Millwork Trim

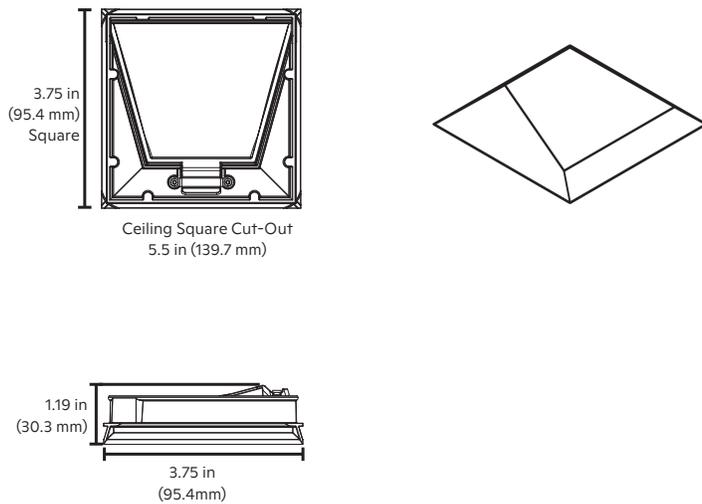

PHOTOMETRIC DATA: 2700 - 5000K VALUES ONLY, DELIVERED LUMENS


Beam Angle: Wall Wash

Model Number	Wattage	Delivered Lumens
D3WWSQ18BTWW	18 W	705

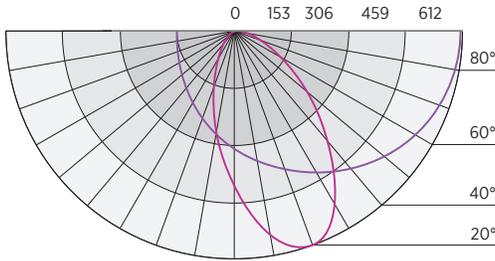

- 1 Vertical plane through horizontal angles (0-180) (through max. cd.)
- 2 Horizontal cone through vertical angle (20) (through max. cd.)

PLACEMENT GUIDE FOR MULTIPLE UNITS

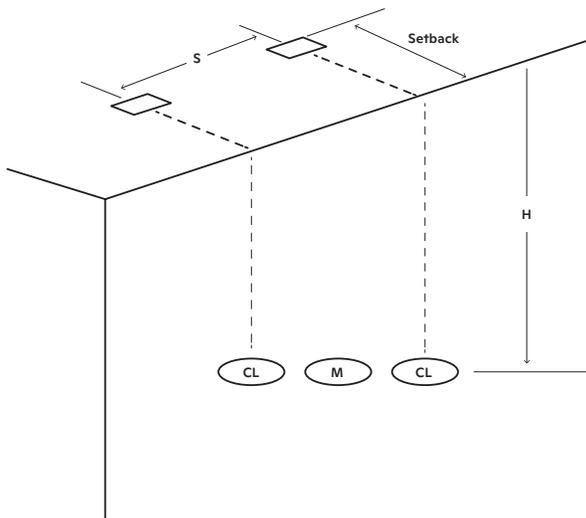


	2 ft (0.6 m) from wall ("Setback")			2 ft (0.6 m) on Center (S)			3 ft (0.9 m) on Center (S)			4 ft (1.2 m) on Center (S)		
Distance from Ceiling (H)	CL	M	CL	CL	M	CL	CL	M	CL	CL	M	CL
1 ft (0.305 m)	30	29	30	21	20	21	17	14	17			
2 ft (0.609 m)	42	43	43	30	30	30	24	21	24			
3 ft (0.914 m)	43	45	43	32	31	31	25	23	25			
4 ft (1.219 m)	35	36	36	26	26	25	20	20	20			
5 ft (1.524 m)	25	26	27	20	19	19	15	15	15			
6 ft (1.828 m)	18	19	20	15	15	14	12	12	11			
7 ft (2.133 m)	14	14	15	11	11	11	9	9	9			
8 ft (2.438 m)	10	11	11	9	9	9	7	7	7			
9 ft (2.743 m)	8	9	9	7	7	7	6	6	6			
10 ft (3.048 m)	7	7	7	6	6	6	5	5	5			

	3 ft (0.9 m) from wall ("Setback")			2 ft (0.6 m) on Center (S)			3 ft (0.9 m) on Center (S)			4 ft (1.2 m) on Center (S)		
Distance from Ceiling (H)	CL	M	CL	CL	M	CL	CL	M	CL	CL	M	CL
1 ft (0.305 m)	14	15	15	11	11	11	9	8	9			
2 ft (0.609 m)	24	25	25	18	18	18	14	13	14			
3 ft (0.914 m)	30	31	31	22	23	23	18	16	18			
4 ft (1.219 m)	29	30	31	22	23	23	18	16	18			
5 ft (1.524 m)	25	26	26	19	20	20	16	14	16			
6 ft (1.828 m)	20	21	21	16	16	17	13	12	13			
7 ft (2.133 m)	16	17	17	13	14	14	11	10	11			
8 ft (2.438 m)	13	14	14	11	11	11	9	8	9			
9 ft (2.743 m)	11	11	11	9	10	10	8	7	8			
10 ft (3.048 m)	9	9	9	8	8	8	7	6	7			

¹ Calculated with five luminaires. Reflectances: 80, 50, 20.
² Values are rounded to the nearest footcandle.

WIDE GAMUT

CIE 1931 Color Chart

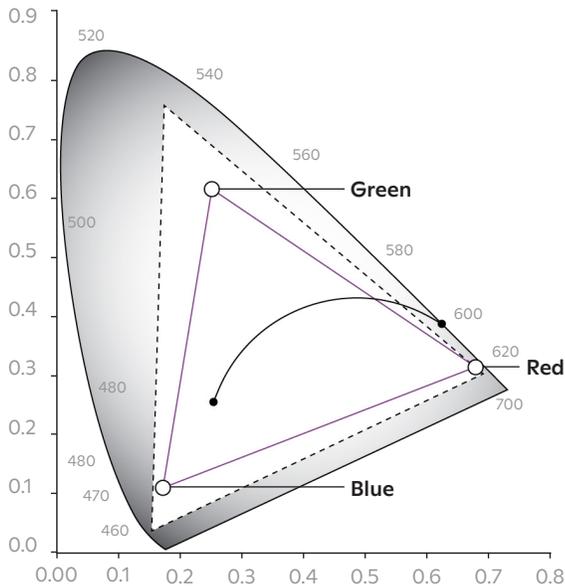

Ketra's D3 LED Downlight can easily be commissioned into Lutron HomeWorks or Athena systems. The product can reproduce any color point with the triangle shaped gamut indicated in the chart to the left. With Ketra's Color Lock tool, the color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature ranges.

- **Color Lock**—Color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.
- - - **Expanded Gamut**—Color lock not guaranteed such that each product produces the most saturated color of which it is capable.

D3 General Specifications

Color Point Maintenance: Employ closed loop optical and thermal feedback capable of maintaining color point accuracy at a one-step MacAdam ellipse over product lifetime.¹

Wireless Capability: LED light source shall have an integrated wireless control on board.

Color Rendering Index (CRI): Capable of CRI greater than 90 at any point along the Black Body Curve from 2,700K to 5,000K.

Single Source Multi-Die Modular Emitter/LED Module Design: Employ a single source multi-die modular emitter/LED module consisting of both monochromatic and phosphor converted blue LED die.

LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

Diagnostic reporting capability²: Clear Connect-Type X (CCX) light sources provide diagnostics and built-in technology to check input voltage and wireless connectivity.

Warranty: Ketra's light source is warranted to be free from defects in material and workmanship for five (5) years or 25,000 hours from date of shipment, whichever is less.

Lighting System Capable of the Following Dimming Functionality:

1. Automatically mimicking natural daylight by shifting Correlated Color Temperature (CCT) and intensity based on time-of-day.
2. Shifting from high CCT at high intensity to low CCT at low intensity, mimicking dimming curve of an incandescent lamp.
3. Changing intensity while maintaining full color spectrum or CCT.
4. Changing full color spectrum or CCT while maintaining intensity.

Spectral Power Distribution Manipulation: Light system capable of manipulating the Spectral Power Distribution (SPD) by automatically adjusting distributions of color intensity while maintaining the same Correlated Color Temperature (CCT).

Dimming Range: Dimmable from 100 to 0.1 percent measured luminous flux.

Color Point Range: Single light source capable of producing 16.7 million colors and white from 1,400K to 10,000K Correlated Color Temperature (CCT).

¹ Color point maintenance not guaranteed in the expanded gamut or while operating at ambient temperatures between -13 to 32 °F (-25 to 0 °C).

² For diagnostics support or more information, please contact Lighting Technical Support at lightingsupport@lutron.com or 1.844.LUTRON1 (1.844.588.7661).