

Lumaris

High-performance static white-dimming, digitally addressable LED linear lighting with 0.1% dimming.

Lumaris

Add Lumaris for sleek architectural illumination for the following residential lighting applications:

- **Cove** — indirect/uplifting that adds warmth and provides ambient aesthetics
- **Under Cabinet** — task lighting that illuminates countertops
- **Under Shelf** — display lighting that highlights decorative features or art
- **Closet**— ceiling or wall-mountable for general lighting in small rooms such as closets, storage rooms, and pantries
- **Under Counter** — accent lighting that can help set the mood
- **Path/Step** — practical, functional lighting that increases saftey (perfect as a nightlight)



System Components

Flexible Installation

Link (daisy chain) fixtures together up to the full loading capacity of the connected LED driver. Self-enclosed driver can be remote mounted away for the LED source, allowing for easy wire termination and customization for most configurations.

Lens Options



Clear and Frosted*



Diffused



Control Options

- 0.1% Homeworks digital controller
- 1% Hi-lume 2-wire LED driver (120V only)

* Clear lens option shown

High-Performance LED

Wattage	5W/ft (12")
Lumens (Delivered)	Clear lens, 300 lumens/ft Frosted lens, 250 lumens/ft Diffused lens, 250 lumens/ft
CRI (Typical)	90+
Ratings	CA T24/JA8 Damp location Clothes closet

Note: Independent measurement of typical 2700K fixture models by Lutron Electronics Co., Inc. for reference only. See the Lumaris specification sheets for LM79 photometric data by fixture type and lens options.


Features

Type	LED Light Bar
Lens	Clear, Frosted, Diffused
LED type	2700 K, 3000 K, 3500 K
Mounting	Surface, 30°/60° angle bracket option
Color	Silver, Black, White, Brown

Dimensions

Length¹ 6", 12", 18", 24", 36", 48"
Width 1.25"
Height 0.5" (clear/frosted lens); 0.7" (diffused lens)

¹ Length does not include end caps; see specification sheet for details.
lutron.com/lumaris

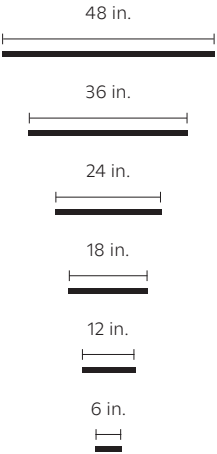



Lumaris

Flexible lengths, multiple color temperatures, and finishes ideal for residential applications.

The Lumaris Difference

High-Performance 0.1% Dimming

Highest quality dimming and 90+CRI LED light performance fixture that comes standard with new Homeworks 0.1% digital controllers with guaranteed flicker-free dimming with Lutron controls backed by 24/7 customer-first service and support.

Intelligent Digitally Addressable

Includes the HomeWorks digital technology that allows you to individually address each linear run with soft, incandescent-like transition between 0.1% and off. Remote mount the controller up to 180 ft. away from the light source (depending on the gauge of wire).

Small Profile & No LED Hot Spots

The diffused lens option conceals LED hot spots and provides a wide 130° distribution to soften the light. With its small profile of 1.25" width x 0.5" height for the Clear/Frosted lens options and 1.25" width x 0.7" height for the Diffused lens option, Lumaris is the perfect solution for tight space lighting applications: under cabinets, counters, and shelves, coves, and paths/steps.

Flexible Applications

Ceiling or wall-mountable for general lighting in small rooms such as clothes closets, storage rooms, and pantries. Suitable for damp locations.



©2022 Lutron Electronics Co., Inc. | P/N 368-5997 Rev B

The Lutron logo and Lutron are trademarks or registered trademarks of Lutron Electronics Co., Inc., in the U.S. and/or other countries.