


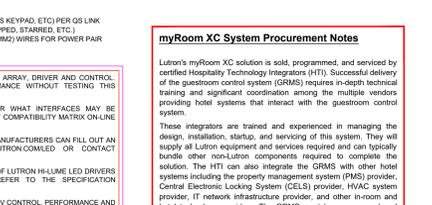
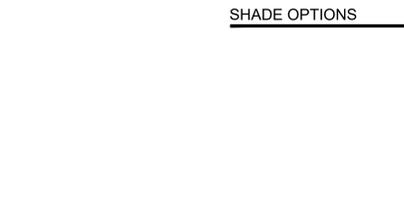
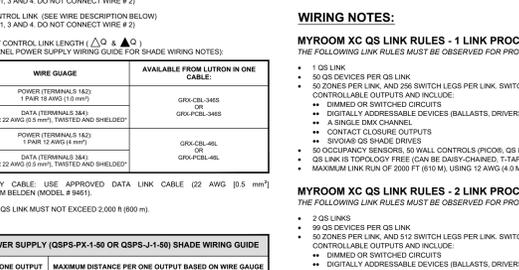
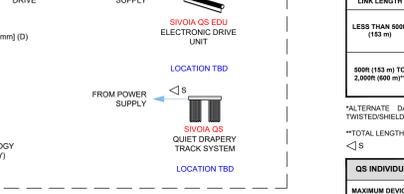
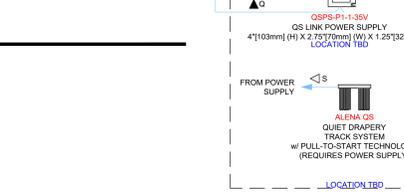
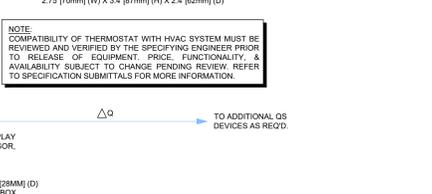
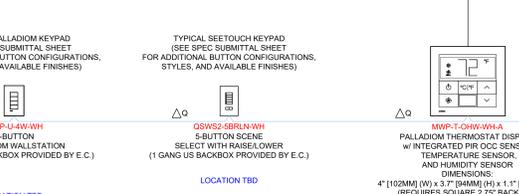
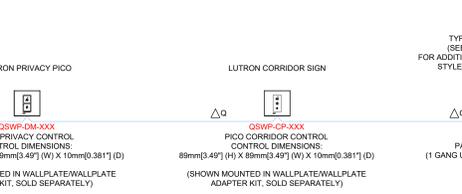
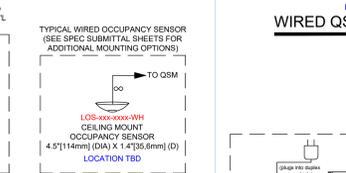
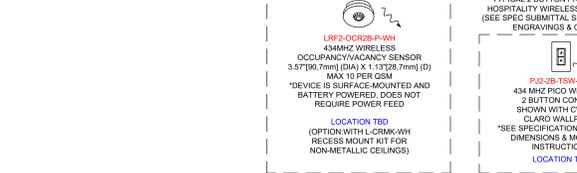
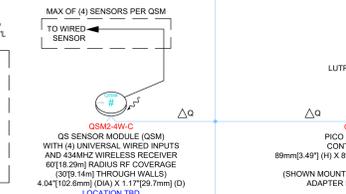
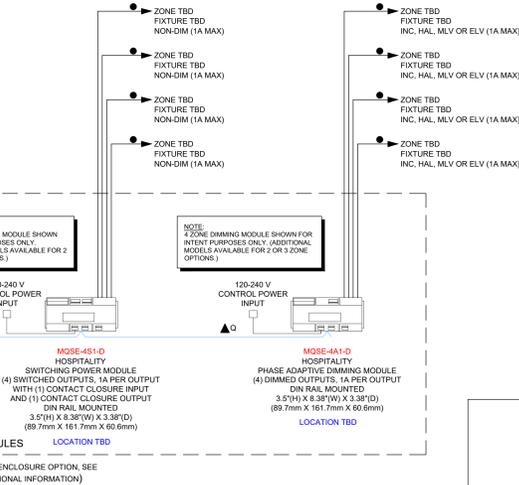
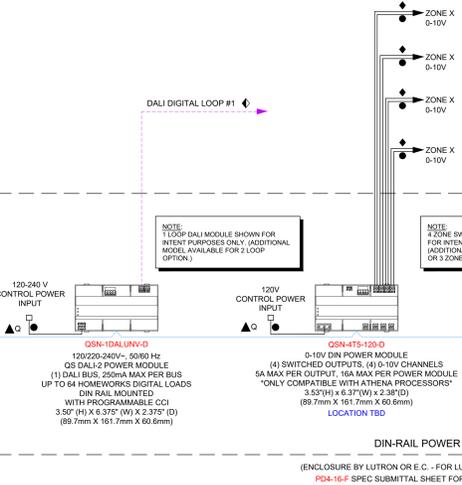
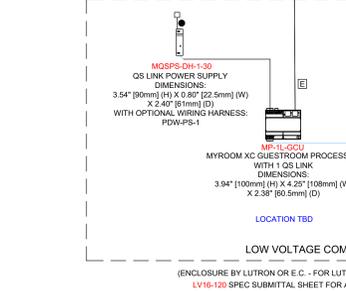
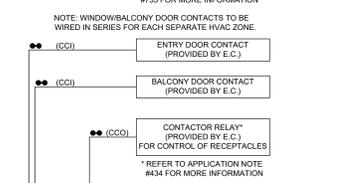

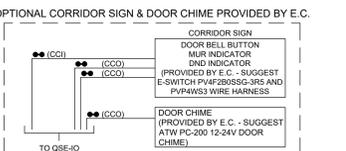
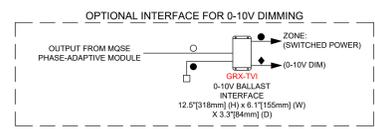
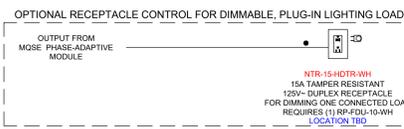
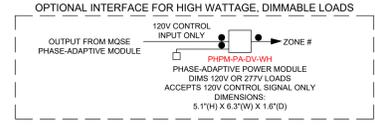
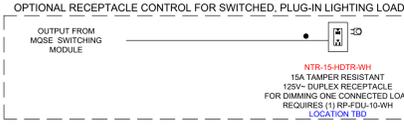
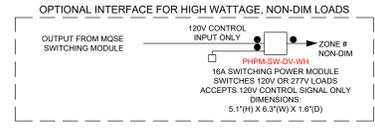


LUTRON NOTES:
 ALL DIMMING BALLASTS TO BE LUTRON ECOSYSTEM, ECOSYSTEM-H SERIES, OR HALLME 30 TYPE UNLESS OTHERWISE NOTED.
 ALL DIMMING DRIVERS TO BE LUTRON ECOSYSTEM DRIVERS: H-HALME 1% H-HALME 1% WITH 50% ON, FADE-TO-BLACK, SERIES, OR H-HALME PREMIER 0.1% UNLESS OTHERWISE NOTED.
 E.E. TO CONFIRM ALL CIRCUITING REQUIREMENTS.
 ARCHITECT TO VERIFY QUANTITY, LOCATION & FINISH OF ALL CONTROLS.
 LUTRON FIELD SERVICE COMMISSIONING INCLUDES IN ALL SYSTEMS INSTALLED AN 8 YEAR LIMITED WARRANTY. THE ELECTRICAL CONTRACTOR MUST CONTACT LUTRON (1-888-586-7611) TO SET UP VISIT WITH 10 DAYS NOTICE.

EQUIPMENT REQUIRED FOR INTEGRATION WITH HOTEL SYSTEMS ONE PER HOTEL REQUIRED

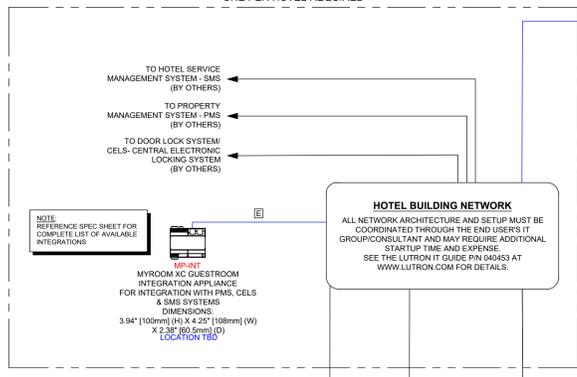

myRoom XC TYPICAL

CONCEPT DRAWING NOT FOR CONSTRUCTION

Drawn By: **MDB**

Drawing Revision: **0**

Drawing Date: **07.12.2023**

Sheet: **1 OF 1**

LUTRON
 Lutron Electronics Co., Inc.
 7300 Suite Road | Coopersburg, PA 18036 USA
 (610) 282-3800 | fax: (610) 282-1148

CONCEPT DRAWING NOTES:
 CONTROL SYSTEM DRAWING IS PROVIDED FOR CONCEPTUAL PURPOSES ONLY AND IS NOT INTENDED FOR CONSTRUCTION. EXACT EQUIPMENT REQUIREMENTS, INCLUDING LOCATIONS AND QUANTITIES, SHOULD BE VERIFIED IN ACCORDANCE WITH THE MOST UP-TO-DATE LIGHTING/ELECTRICAL REFLECTED CEILING PLANS, LIGHTING FIXTURE SCHEDULES, PANEL SCHEDULES, CONTROL INTENT AND SPECIFICATIONS. SHADE EQUIPMENT SHOULD BE VERIFIED IN ACCORDANCE WITH ARCHITECTURAL PLANS, SPECIFICATIONS AND WINDOW SCHEDULES/DETAILS.

CONCEPT DRAWING NOTES:
 CONTROL SYSTEM DRAWING IS PROVIDED FOR CONCEPTUAL PURPOSES ONLY AND IS NOT INTENDED FOR CONSTRUCTION. EXACT EQUIPMENT REQUIREMENTS, INCLUDING LOCATIONS AND QUANTITIES, SHOULD BE VERIFIED IN ACCORDANCE WITH THE MOST UP-TO-DATE LIGHTING/ELECTRICAL REFLECTED CEILING PLANS, LIGHTING FIXTURE SCHEDULES, PANEL SCHEDULES, CONTROL INTENT AND SPECIFICATIONS. SHADE EQUIPMENT SHOULD BE VERIFIED IN ACCORDANCE WITH ARCHITECTURAL PLANS, SPECIFICATIONS AND WINDOW SCHEDULES/DETAILS.

CONCEPT DRAWING NOTES:
 CONTROL SYSTEM DRAWING IS PROVIDED FOR CONCEPTUAL PURPOSES ONLY AND IS NOT INTENDED FOR CONSTRUCTION. EXACT EQUIPMENT REQUIREMENTS, INCLUDING LOCATIONS AND QUANTITIES, SHOULD BE VERIFIED IN ACCORDANCE WITH THE MOST UP-TO-DATE LIGHTING/ELECTRICAL REFLECTED CEILING PLANS, LIGHTING FIXTURE SCHEDULES, PANEL SCHEDULES, CONTROL INTENT AND SPECIFICATIONS. SHADE EQUIPMENT SHOULD BE VERIFIED IN ACCORDANCE WITH ARCHITECTURAL PLANS, SPECIFICATIONS AND WINDOW SCHEDULES/DETAILS.

LED DIMMING REQUIRES AN EXACT MATCH BETWEEN THE LED ARRAY, DRIVER AND CONTROL. LUTRON CANNOT GUARANTEE COMPATIBILITY OR PERFORMANCE WITHOUT TESTING. THIS COMBINATION:

- TO CONFIRM WHAT PRODUCTS LUTRON HAS AVAILABLE OR WHAT INTERFACES MAY BE REQUIRED, CALL 1-877-DIM-LED OR CHECK LUTRON'S PRODUCT COMPATIBILITY MATRIX ONLINE AT WWW.LUTRON.COM
- TO REQUEST THE TESTING OF AN LED PRODUCT BY LUTRON MANUFACTURERS CAN FILL OUT AN LED EVALUATION REQUEST FORM ONLINE AT WWW.LUTRON.COM OR CONTACT LED@LUTRON.COM
- LUTRON CAN GUARANTEE COMPATIBILITY AND PERFORMANCE OF LUTRON H-HALME LED DRIVERS USED WITH APPROPRIATE LUTRON CONTROLS. PLEASE REFER TO THE SPECIFICATION SUBMITTAL SHEET FOR FURTHER INFORMATION.
- IF USING UNTESTED, NON-LUTRON LED DRIVERS REQUIRING 0-10V CONTROL, PERFORMANCE AND COMPATIBILITY CANNOT BE GUARANTEED BY LUTRON PRODUCTS FOLLOWING THE IEC STANDARD 60928 ARE MORE LIKELY TO PROVIDE ACCEPTABLE PERFORMANCE RESULTS. DETERMINATION OF RESULT ACCEPTABILITY IS UP TO THE USER'S DISCRETION.
- IF USING UNTESTED, NON-LUTRON LED DRIVERS REQUIRING PHASE CONTROL, PERFORMANCE AND COMPATIBILITY CANNOT BE GUARANTEED BY LUTRON. ELY PRODUCTS PROVIDING HIGH END AND LOW END TRIM ADJUSTMENTS OR LUTRON H-HALME 1% 277V DRIVERS ARE MORE LIKELY TO PROVIDE ACCEPTABLE PERFORMANCE RESULTS. DETERMINATION OF RESULT ACCEPTABILITY IS UP TO THE USER'S DISCRETION.

LED DIMMING REQUIRES AN EXACT MATCH BETWEEN THE LED ARRAY, DRIVER AND CONTROL. LUTRON CANNOT GUARANTEE COMPATIBILITY OR PERFORMANCE WITHOUT TESTING. THIS COMBINATION:

- TO CONFIRM WHAT PRODUCTS LUTRON HAS AVAILABLE OR WHAT INTERFACES MAY BE REQUIRED, CALL 1-877-DIM-LED OR CHECK LUTRON'S PRODUCT COMPATIBILITY MATRIX ONLINE AT WWW.LUTRON.COM
- TO REQUEST THE TESTING OF AN LED PRODUCT BY LUTRON MANUFACTURERS CAN FILL OUT AN LED EVALUATION REQUEST FORM ONLINE AT WWW.LUTRON.COM OR CONTACT LED@LUTRON.COM
- LUTRON CAN GUARANTEE COMPATIBILITY AND PERFORMANCE OF LUTRON H-HALME LED DRIVERS USED WITH APPROPRIATE LUTRON CONTROLS. PLEASE REFER TO THE SPECIFICATION SUBMITTAL SHEET FOR FURTHER INFORMATION.
- IF USING UNTESTED, NON-LUTRON LED DRIVERS REQUIRING 0-10V CONTROL, PERFORMANCE AND COMPATIBILITY CANNOT BE GUARANTEED BY LUTRON PRODUCTS FOLLOWING THE IEC STANDARD 60928 ARE MORE LIKELY TO PROVIDE ACCEPTABLE PERFORMANCE RESULTS. DETERMINATION OF RESULT ACCEPTABILITY IS UP TO THE USER'S DISCRETION.
- IF USING UNTESTED, NON-LUTRON LED DRIVERS REQUIRING PHASE CONTROL, PERFORMANCE AND COMPATIBILITY CANNOT BE GUARANTEED BY LUTRON. ELY PRODUCTS PROVIDING HIGH END AND LOW END TRIM ADJUSTMENTS OR LUTRON H-HALME 1% 277V DRIVERS ARE MORE LIKELY TO PROVIDE ACCEPTABLE PERFORMANCE RESULTS. DETERMINATION OF RESULT ACCEPTABILITY IS UP TO THE USER'S DISCRETION.