


HomeWorks® QS PowerKit

The HomeWorks® QS PowerKit is necessary for installations that require the mounting of up to 2 HomeWorks® QS Processors (HQP6-2) in HWI-PNL-8 or HWI-PNL-8-CE.

The HomeWorks® QS PowerKit provides a simple power connection method and has an Input Power Switch that can be used to easily remove power to the HomeWorks® QS Power Supply units and the equipment they feed.

The PowerKit provides a mounting method for HomeWorks® QS Power Supply units (QSPS-DH-1-60), which are required to power the HomeWorks® QS Processors and provide link power for devices.

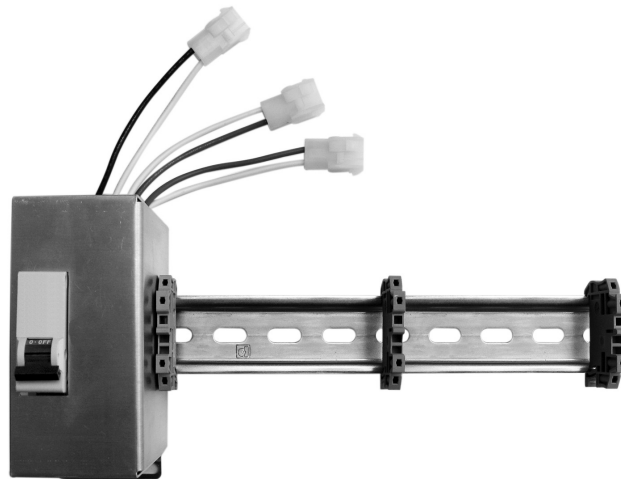

HomeWorks® QS PowerKit
(PNL-8-PWRKIT)

Model Number

PNL-8-PWRKIT HomeWorks® QS PowerKit

HomeWorks[®] QS PowerKit

Specifications

Model Number	PNL-8-PWRKIT
Power	120-240 V~ 50/60 Hz 2A
Capacity	Can accommodate up to two HomeWorks [®] QS Power Supply units (QSPS-DH-1-60)
Environment	Ambient operating temperature: 32 °F and 104 °F (0 °C and 40 °C). Ambient operating humidity: 0% to 90% humidity, non-condensing. Indoor use only.
Mounting	Mount in HWI-PNL-8 or HWI-PNL-8-CE using screws and washers provided
Connections	One Power Harness (quick connect to HWI-PNL-8) Two Supply Harnesses (quick connect to HomeWorks [®] QS Power Supply units)
Warranty	8 Year Limited Warranty. http://www.lutron.com/TechnicalDocumentLibrary/HomeWorks_Warranty.pdf

HomeWorks[®] QS PowerKit

Configuration Examples

