


## Square-Style Faceplates

Square-style faceplates allow coordination with square-style Palladiom lighting controls.

### Features

- Architectural matte, glass, and metal faceplates feature the same aesthetic and profile as Palladiom square-style keypads.
- Palladiom square-style accessory faceplates work with round and square-style wall boxes that have 71 mm center-to-center spacing for multi-gang applications. See **Mounting** on page 6.
- Works with T&J Electric Lavina 95 product line.

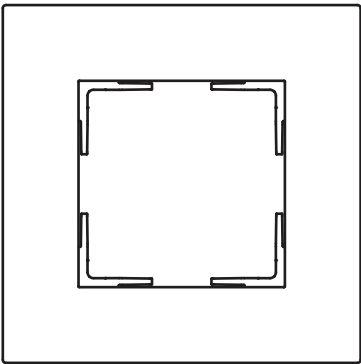









1-Column Square Style

### Colors and Finishes



#### Architectural Matte Finishes


|   |                           |
|---|---------------------------|
|    | Almond<br><b>AL</b>       |
|    | Beige<br><b>BE</b>        |
|    | Black<br><b>BL</b>        |
|    | Brown<br><b>BR</b>        |
|   | Gray<br><b>GR</b>         |
|  | Ivory<br><b>IV</b>        |
|  | Light Almond<br><b>LA</b> |
|  | Sienna<br><b>SI</b>       |
|  | Taupe<br><b>TP</b>        |
|  | White<br><b>WH</b>        |

#### Architectural Metal Finishes<sup>1</sup>

|   |   |
|---|---|
|    | Antique Brass <sup>3</sup><br><b>QB</b> |
|    | Bright Brass<br><b>BB</b>               |
|    | Bright Chrome<br><b>BC</b>              |
|    | Bright Nickel<br><b>BN</b>              |
|   | Polished Graphite<br><b>PG</b>          |
|  | Satin Brass<br><b>SB</b>                |
|  | Satin Chrome<br><b>SC</b>               |
|  | Satin Nickel<br><b>SN</b>               |

#### Glass Finish<sup>2</sup>

|   |                                 |
|---|---------------------------------|
|  | Clear Black Glass<br><b>CBL</b> |
|  | Clear White Glass<br><b>CWH</b> |

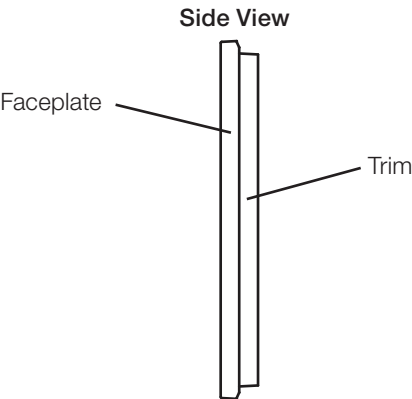

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- PD-CK-1 finish chip sample set is available to represent these colors and finishes. Chips should not be used for exact matching of the color or finish<sup>4</sup>.

<sup>1</sup> Faceplate will be the selected color and the trim will be Black (see Side View above). Lutron recommends coordinating a Black accessory.

<sup>2</sup> Faceplate will be the selected color and the trim will be Black for CBL and White for CWH (see Side View above). Lutron recommends coordinating a Black accessory for CBL and a White accessory for CWH.

<sup>3</sup> Antique Brass is a handcrafted finish that is created using a manual relief process. This artisanal process can result in variations in luster, hue and appearance.

<sup>4</sup> Contact Lutron prior to using any samples for matching of non-Lutron product.

|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

## Specifications

### Regulatory Approvals

- Lutron Quality Systems registered to ISO 9001:2015
- Complies with IEC 60669-2-1 and IEC 60884-2-1

### Environment

- Ambient operating temperature: 0 °C to 40 °C (32 °F to 104 °F)
- Maximum 90% non-condensing relative humidity
- Indoor use only

### Product-Specific Features

- Carefully matched aesthetic front view and profile with Palladiom keypad stations
- Works with T&J Electric Lavina 95 product line
- Wallplates available in multiple colors and finishes, see the front page for complete list

### Wallbox Dimensions

- Square: 71 mm H × 71 mm W × ≥ 40 mm D
- Round:  $\phi 68$  mm × ≥ 40 mm D

### Glass-Specific Features

- Heat-strengthened glass
- Lamination layer will contain the glass in the event of a break

### Cleaning

- Use only a soft cloth with warm water and mild soap to clean faceplates (no chemical cleaners)



|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |


Dimensions

Square Style


Measurements shown as: mm

1-Gang


Front View

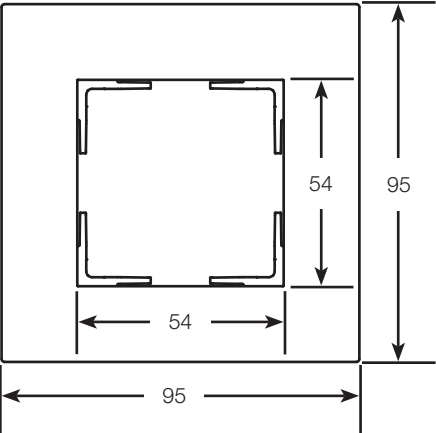


Side Views:  
Architectural Matte



Architectural Metal




Glass




2-Gang

Front View

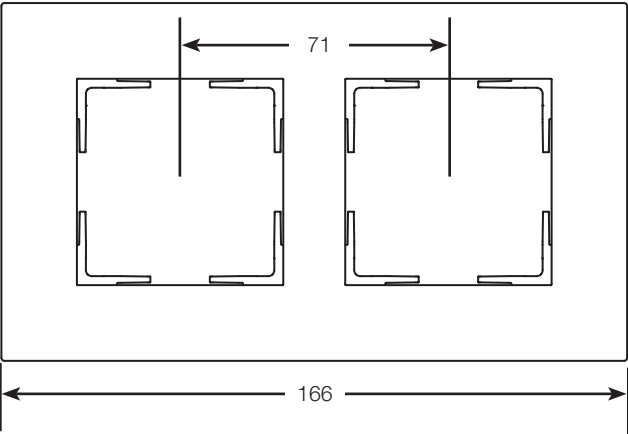

3-Gang

Front View

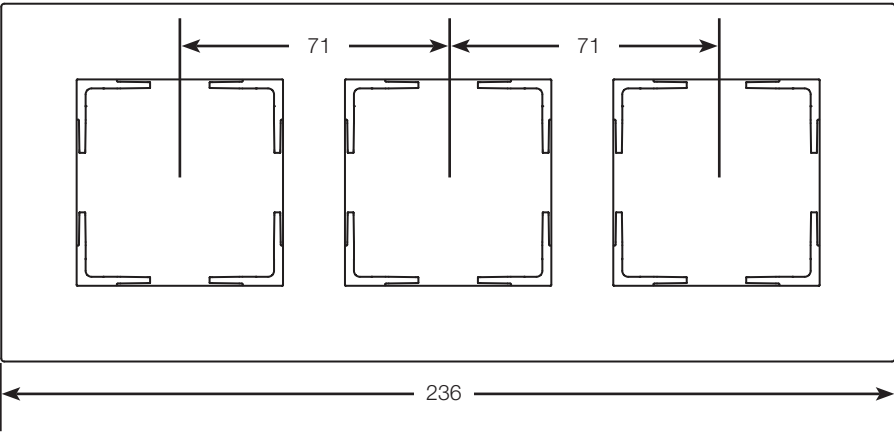

|             |                |
|-------------|----------------|
| Job Name:   | Model Numbers: |
| Job Number: |                |

## How to Build a Model Number

LWT – S – A – WH

### Family

**LWT:** Palladiom  
Faceplate Kit

### Faceplate Options

**S:** Square Style

### Gangs\* and Openings

**A\*\*:** International Accessory

\* Palladiom Accessories do not gang with other devices of different sizes (e.g., Palladiom keypads, Palladiom thermostats, Maestro controls, or GRAFIK T controls).

\*\* Repeat the letter designation "A" (3 maximum) for each opening (e.g., 2-gang = AA, 3-gang = AAA).

### Colors and Finishes

Colors and finishes for wiring devices and faceplates should be coordinated. See below for faceplate colors, finishes, and Lutron recommended colors for T&J Electric Lavina 95 wiring devices.

#### Faceplates

##### *Architectural Matte Finishes*

**AL:** Almond

**BE:** Beige

**BL:** Black

**BR:** Brown

**GR:** Gray

**IV:** Ivory

**LA:** Light Almond

**SI:** Sienna

**TP:** Taupe

**WH:** White

#### Wiring Devices

**LAL:** Almond

**LBE:** Beige

**LBL:** Black

**LBR:** Brown

**LGR:** Gray

**LIV:** Ivory

**LLA:** Light Almond

**LSI:** Sienna

**LTP:** Taupe

**LWH:** White

##### *Architectural Metal Finishes*

**QB:** Antique Brass

**BB:** Bright Brass

**BC:** Bright Chrome

**BN:** Bright Nickel

**PG:** Polished Graphite

**SB:** Satin Brass

**SC:** Satin Chrome

**SN:** Satin Nickel

**LBL:** Black

**LBL:** Black

**LBL:** Black

**LBL:** Black

**LBL:** Black

**LBL:** Black

**LBL:** Black

**LBL:** Black

##### *Glass Finish*

**CBL:** Clear Black Glass

**CWH:** Clear White Glass

**LBL:** Black

**LWH:** White


Job Name:

Model Numbers:


Job Number:

## Mounting

Ensure that the devices are touching. There must be no space between the devices.

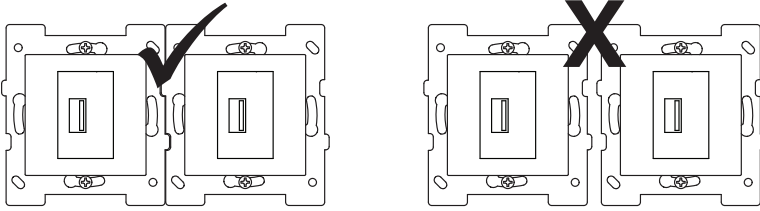


The devices must be installed on a flat wall and must not be recessed into the wall. The opening in the wall must be adjusted if the device is recessed into the wall.

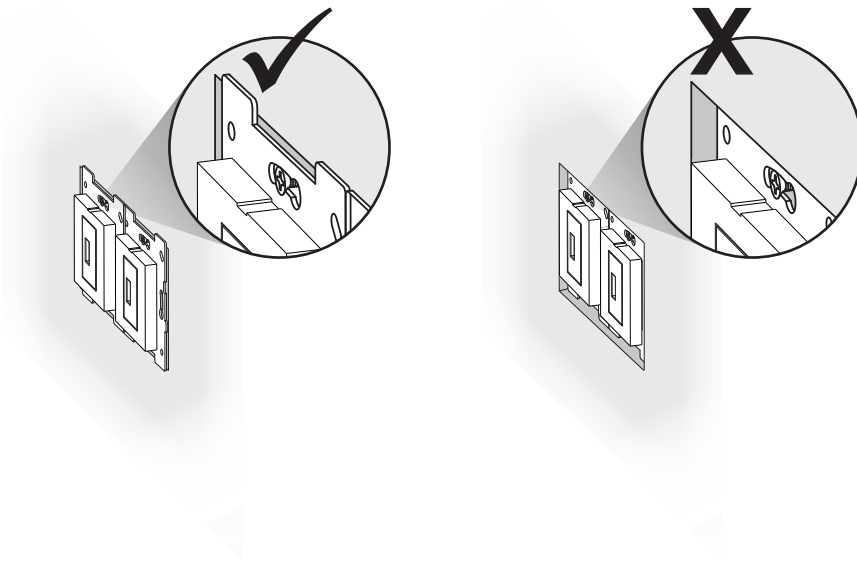

**Note:** Utilize T&J Electric non-standard bracket designated by “-A” (e.g., JC811USBA-W-A).

**Note:** If installing on uneven or compliant surfaces (e.g., padded headboard), contact Lutron for required custom spacer CPN7845.

Due to variation in installation practices and product depth, Lutron recommends a gap of 19 mm or greater between the faceplates when installing accessories next to keypads.

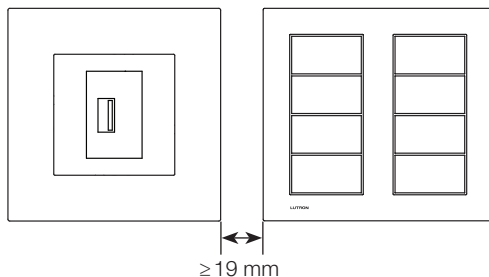

Job Name:


Model Numbers:

Job Number:


Mounting (continued)

Round Wallbox


1-Gang

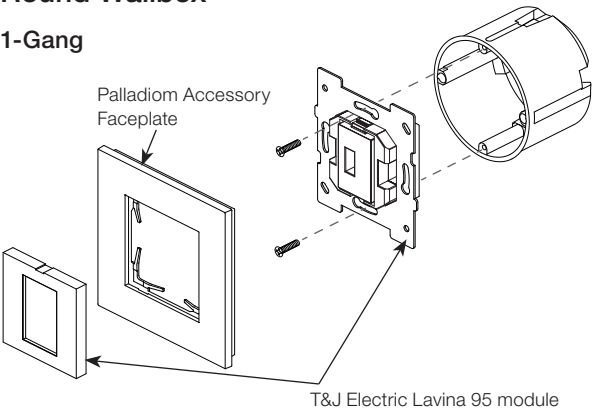

2-Gang

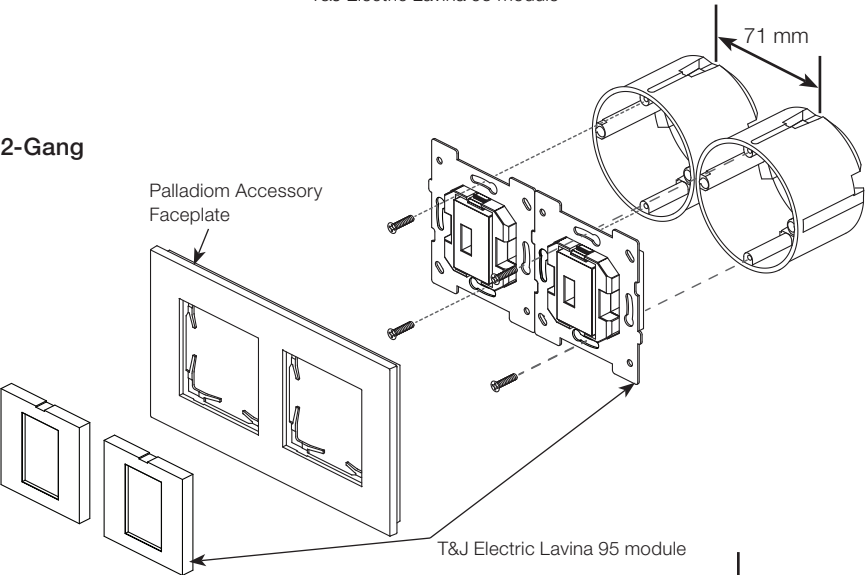


3-Gang

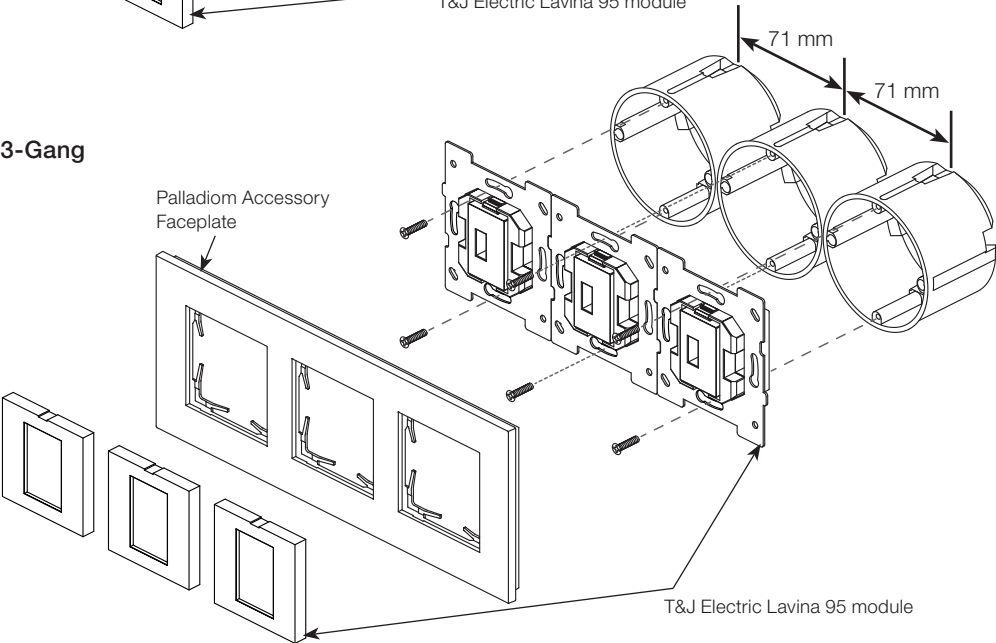


Mounting (continued)

Square Wallbox


1-Gang

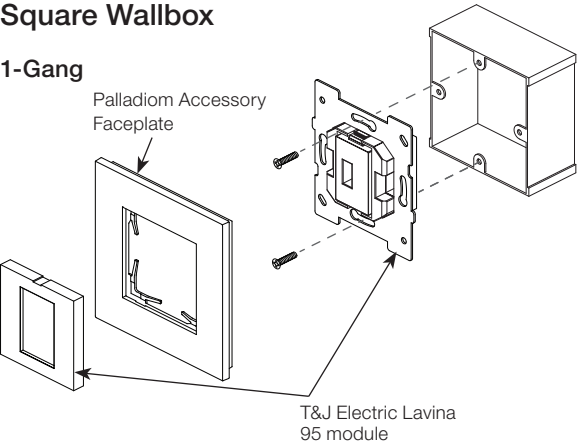


2-Gang

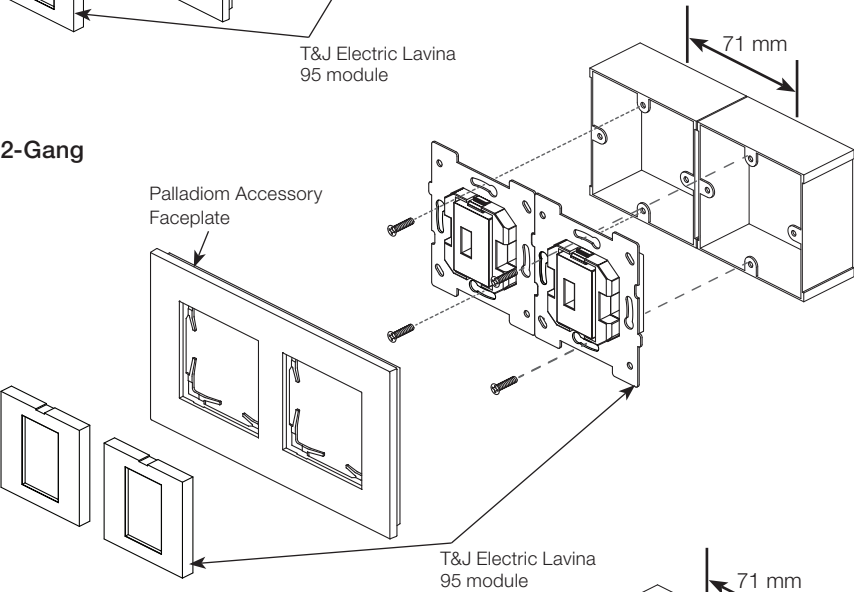

3-Gang

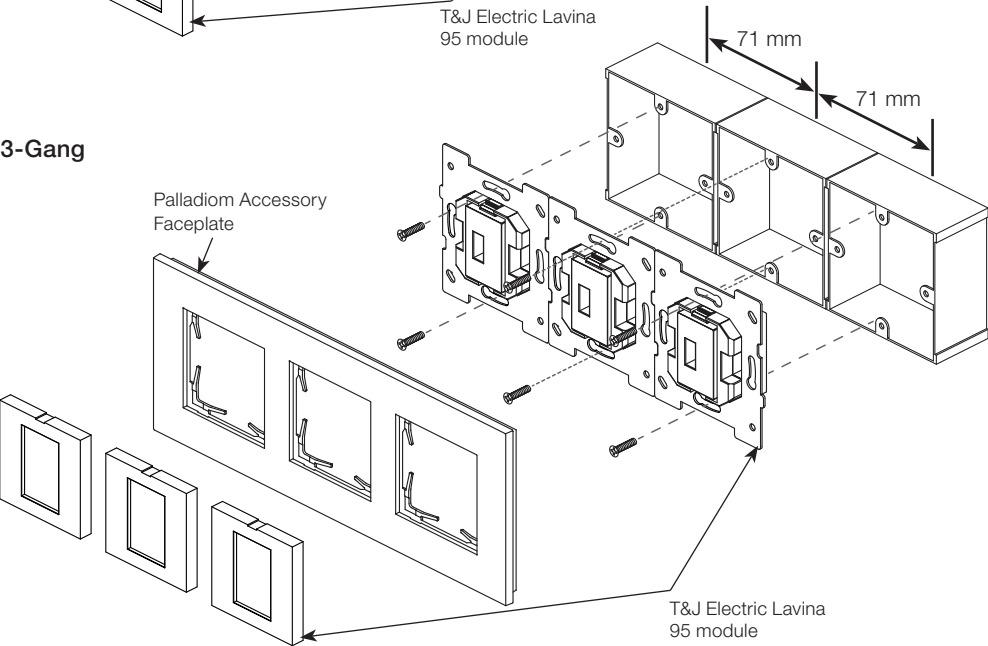

Lutron, , Palladiom, and Maestro are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries. GRAFIK T is a trademarks of Lutron Electronics Co., Inc. T&J Electric is a trademark of T&J Electric (Shenzhen) Limited.

| SPECIFICATION SUBMITTAL |                | Page |
|-------------------------|----------------|------|
| Job Name:               | Model Numbers: |      |
| Job Number:             |                |      |